

SCIENTIFIC REPORTS

**OPEN**

Direct measurement on the geometric phase of a double quantum dot qubit via quantum point contact device

Received: 27 March 2015

Accepted: 02 June 2015

Published: 29 June 2015

Bao Liu¹, Feng-Yang Zhang², Jie Song³ & He-Shan Song⁴

We propose a direct measurement scheme to read out the geometric phase of a coupled double quantum dot system via a quantum point contact(QPC) device. An effective expression of the geometric phase has been derived, which relates the geometric phase of the double quantum dot qubit to the current through QPC device. All the parameters in our expression are measurable or tunable in experiment. Moreover, since the measurement process affects the state of the qubit slightly, the geometric phase can be protected. The feasibility of the scheme has been analyzed. Further, as an example, we simulate the geometrical phase of a qubit when the QPC device is replaced by a single electron transistor(SET).

In recent years, quantum computation and quantum information are developing rapidly. As a result people have devoted much effort in searching for physical settings as quantum bits, such as quantum optical system^{1,2}, diamond NV center³⁻⁵ and quantum dot system⁶⁻⁸. Quantum dot is a promising candidate of solid-state qubit. The number of charges, which confined in a quantum dot can be controlled by electrical gates surrounding it. Quantum dot has the merit that the charges and spins confined in it can be directly manipulated optically or electrically, and has a long coherent time.

The fluctuation of charges or nuclear spins will diminish the coherence time of quantum dot qubits^{9,10}. Combating decoherence is a critical task in quantum memory. Geometric phase, which is robust to the fluctuation of the bath, is an important resource to construct phase gates^{9,11} in quantum information systems.

Theoretically geometric phase was discovered in context of adiabatic and cyclic closed quantum system by Berry in 1984¹², and then it has been generalized to non-adiabatic cyclic system, non-adiabatic and non-cyclic system¹³⁻²¹. Recently, Yin and Tong have studied the effect of the environment on the geometric phase in open quantum dot qubit system^{22,23}. However, the methods to get the geometric phase are mainly by interference effect of the system. As the method proposed by Pancharatnam, in a quantum optical system, people usually need to compare phases of two beams of polarized light. The measurement of the geometric phase always lead to the destruction of information carried by the quantum system. Therefore, to propose a scheme that the geometric phase can be measured without spoiling information embedded in quantum system is very important and interesting for the fundamental concepts of quantum theory and the quantum information process.

In this paper by studying a well known model we propose a direct measurement scheme on the geometric phase via the current through the QPC device. Since the QPC affects the quantum state of the double quantum dot system slightly^{24,25}, the read out operation conserves the phase information. Then

¹Beijing Computational Science Research Center (CSRC), Beijing 100094, China. ²School of Physics and Materials Engineering, Dalian Nationalities University, Dalian 116600, China. ³Department of Physics, Harbin Institute of Technology, Harbin, 150001, PR China. ⁴School of Physics and Optoelectronic Technology, Dalian University of Technology, Dalian 116024, China. Correspondence and requests for materials should be addressed to B.L. (email: dexter@csrc.ac.cn)

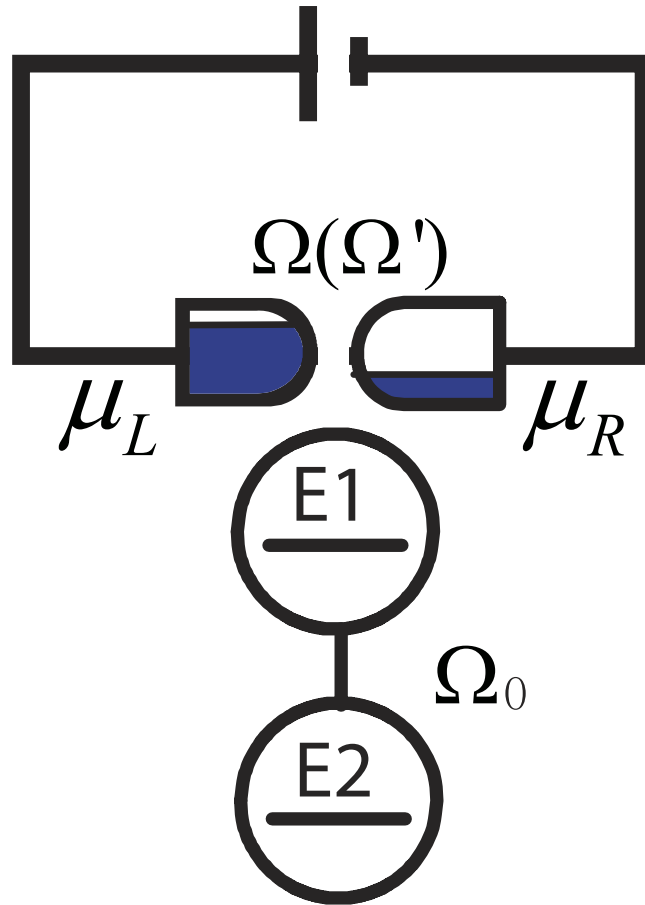


Figure 1. A typical model for quantum point contact measurement. In this model the energy level of the two quantum dot are E_1 and E_2 respectively. Ω_0 is the coupling coefficient of the qubit. The potential between electrodes varies dependent on the place of the electron on the qubit.

we studied the feasibility of the scheme. As an example of our theory we simulate the geometric phase when the QPC device is replaced by a SET.

Results

Model and master equation. Our model composed by a double quantum dot qubit and a QPC device as shown in Fig. 1. Two quantum dots in the qubit are coupled to each other with the strength Ω_0 . We assume that there is only one energy level in each quantum dot (E_1 and E_2). One electron is confined in the qubit and tunnels between these two levels. The QPC device contains two leads. The chemical potential of the left lead μ_L is higher than that of the right lead μ_R . Therefore, electrons can tunnel from left lead to right lead. The qubit interacts with the QPC device by changing the coupling strength between two leads. When the electron in the qubit occupies E_2 state, the coupling strength between two leads is Ω . Once the electron jumps to E_1 state, the coupling strength will be changed to Ω' . At low temperature two leads of the QPC are filled to their Fermi energies by electrons. The Hamiltonian of our model reads

$$H_s = E_1 a_1^\dagger a_1 + E_2 a_2^\dagger a_2 + \Omega_0 (a_1^\dagger a_2 + a_2^\dagger a_1), \tag{1}$$

$$H_d = \sum_l E_l c_l^\dagger c_l + \sum_r E_r c_r^\dagger c_r, \tag{2}$$

$$H_i = \sum_{l,r} \Omega (c_l^\dagger c_r + c_r^\dagger c_l) + \sum_{l,r} \delta\Omega (a_1^\dagger a_1 c_l^\dagger c_r + h. c.), \tag{3}$$

where a_i and a_i^\dagger ($i = 1, 2$) are the annihilation and creation operators of the electron confined in the qubit. While c_{lr} and c_{lr}^\dagger are the annihilation and creation operators of the electrons in the left/right lead, respectively. Here E_{lr} is the energy of left/right lead. We defined $\delta\Omega = \Omega - \Omega'$. H_s, H_d are the Hamiltonian

of the qubit and the QPC device, respectively. The QPC is connected to a large electron source. Therefore, the Fermi energy of each lead is not changed by the tunneling between two leads. And the voltage V_d between two leads is a constant. H_i describes the interaction between the qubit and the QPC device. Hence, there is no electron tunnels between leads and the qubit.

Since the the whole system contains qubit and QPC device is a closed system. From the Schödinger equation of the whole system $\partial_t |\Psi(t)\rangle = H|\Psi(t)\rangle$, and the method proposed by Gurvitz^{26–29}, we obtain a hierarchical equation of the qubit

$$\dot{\rho}_{11}^{(n)} = -D'\rho_{11}^{(n)} + D'\rho_{11}^{(n-1)} + i\Omega_0(\rho_{12}^{(n)} - \rho_{21}^{(n)}), \quad (4)$$

$$\dot{\rho}_{22}^{(n)} = -D\rho_{22}^{(n)} + D\rho_{22}^{(n-1)} - i\Omega_0(\rho_{12}^{(n)} - \rho_{21}^{(n)}), \quad (5)$$

$$\dot{\rho}_{12}^{(n)} = i(E_2 - E_1)\rho_{12}^{(n)} + i\Omega_0(\rho_{11}^{(n)} - \rho_{22}^{(n)}) - \frac{1}{2}(D' + D)\rho_{12}^{(n)} + (DD')^{\frac{1}{2}}\rho_{12}^{(n-1)}. \quad (6)$$

In these expressions ρ is the reduced density matrix of the qubit. The bases of ρ are $|1\rangle$ and $|2\rangle$, where $|i\rangle$ means the electron in the qubit occupies E_i ($i=1, 2$) energy level. Hence, the superscription n counts the number of electrons, which passed the QPC^{30,31}. Here $D = 2\pi|\Omega|^2\rho_l\rho_rV_d$ ($D' = 2\pi|\Omega'|^2\rho_l\rho_rV_d$) is the coupling strength between the two leads when the electron in the qubit occupies E_2 (E_1) energy level. We have used $\rho_{l/r}$ to describe the density of states of the left/right lead^{32,33}.

Sum of the superscriptions of the hierarchical equation we obtain a master equation of the qubit as

$$\dot{\rho}_{11} = i\Omega_0(\rho_{12} - \rho_{21}), \quad (7)$$

$$\dot{\rho}_{22} = i\Omega_0(\rho_{21} - \rho_{12}), \quad (8)$$

$$\dot{\rho}_{12} = i(E_2 - E_1)\rho_{12} + i\Omega_0(\rho_{11} - \rho_{22}) - \frac{1}{2}\Gamma_d\rho_{12}. \quad (9)$$

This master equation can be abbreviated to

$$\dot{\rho} = -i[H_s, \rho] - \frac{1}{2}\mathcal{J}(\rho), \quad (10)$$

where $\mathcal{J}(\rho) = \Gamma_d(\sigma\sigma^\dagger\rho\sigma^\dagger\sigma + \sigma^\dagger\sigma\rho\sigma\sigma^\dagger)$ is the dissipative part. We have defined $\Gamma_d = (\sqrt{D} - \sqrt{D'})^2$ as the decoherence rate of the qubit. Hence, $\sigma = |E_1\rangle\langle E_2|$ is the pseudospin operator of the qubit.

Further, we can obtain the current through the QPC device as

$$I = D'\rho_{11} + D\rho_{22}. \quad (11)$$

Direct measurement scheme on geometric phase. We use the formula proposed by Tong *et al.* in Refs. 18,19 to calculate the geometric phase of the qubit. The geometric phase of a two level system can be written as

$$\gamma(\tau) = \text{Arg} \left\{ \sum_{k=1}^2 \sqrt{\omega_k(0)\omega_k(\tau)} \langle \Psi_k(0) | \Psi_k(\tau) \rangle \times \exp \left[- \int_0^\tau \langle \Psi_k(t) | \dot{\Psi}_k(t) \rangle dt \right] \right\}, \quad (12)$$

where $\omega_k(0)$, $\omega_k(\tau)$ and $|\Psi_k(0)\rangle$, $|\Psi_k(\tau)\rangle$ ($k=1, 2$) are the instantaneous eigenvalues and eigenvectors of the qubit at time $t=0, \tau$. For simplicity the initial condition of the qubit is taken as $\rho_{11}=1$ and $\rho_{22}=\rho_{12}=\rho_{21}=0$. Under this initial condition the geometric phase of the qubit is

$$\gamma(\tau) = i \int_0^\tau \langle \Psi_1(t) | \dot{\Psi}_1(t) \rangle dt. \quad (13)$$

An arbitrary density matrix of a two level system can maps in a Bloch sphere

$$\rho = \frac{1}{2} (1 + \vec{r} \cdot \vec{\sigma}) = \frac{1}{2} \begin{pmatrix} 1 + r \cos \theta & r \sin \theta e^{-i\phi} \\ r \sin \theta e^{i\phi} & 1 - r \cos \theta \end{pmatrix}, \quad (14)$$

where r is the length of the Bloch vector. We have defined θ (*zenith angle*) and ϕ (*azimuth angle*) to depict the direction of the Bloch vector. Without lose of generality, we obtain the instantaneous eigenvalues and the eigenvectors of an arbitrary two level system as

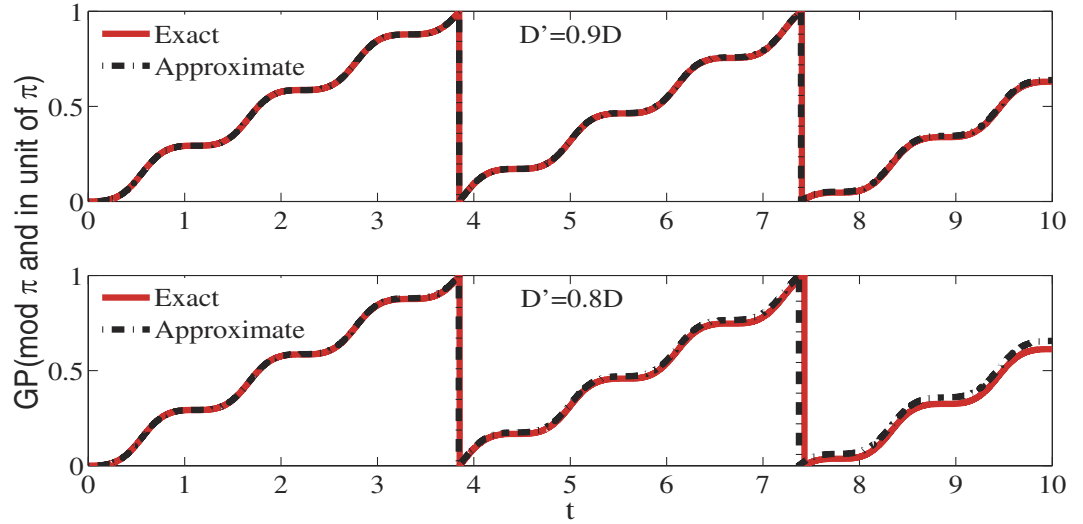


Figure 2. In these figures we compare the geometric phases from Eq. (18)(dash-dot line) and the exact ones(red solid line). The parameters are chosen as $\Omega_0 = 2$, $\Delta = 4$ and $D = 1$. In upper and lower figure $D' = 0.9D$ and $D' = 0.8D$, respectively.

$$\omega_1 = \frac{1}{2}(1 + |\vec{r}|), |\Psi_1\rangle = \begin{pmatrix} \cos \frac{\theta}{2} \\ \sin \frac{\theta}{2} e^{i\phi} \end{pmatrix}. \tag{15}$$

$$\omega_2 = \frac{1}{2}(1 - |\vec{r}|), |\Psi_2\rangle = \begin{pmatrix} \sin \frac{\theta}{2} \\ \cos \frac{\theta}{2} e^{i\phi} \end{pmatrix}. \tag{16}$$

The initial condition of the qubit implies that $\omega_1(0) = 1, \omega_2(0) = 0$ and $|\Psi_1(0)\rangle = (1, 0)^T, |\Psi_2(0)\rangle = (0, 1)^T$. Therefore, the geometric phase of our system reads

$$\gamma(\tau) = i \int_0^\tau \left(i\dot{\phi} \sin^2 \frac{\theta}{2} \right) dt = - \int_0^\tau \dot{\phi} \left(\frac{1 - \cos \theta}{2} \right) dt. \tag{17}$$

Finally, with our method we obtain a simple expression of the geometrical phase, which relates the geometric phase of the qubit to the current through the QPC device.

$$\gamma(\tau) = \int_0^\tau \frac{\Delta}{2} \frac{I - D'}{D - I} dt. \tag{18}$$

Here $\Delta = E_2 - E_1$ is the energy difference between the two levels in the qubit.

It has a very important merit that all the parameters in the expression are observable and can be measured or tuned in experiment. From the expression of the current Eq. (11) we find that $D(D')$ is nothing but the current through the QPC when the electron in the qubit occupies $E_2(E_1)$ energy level. We can trap the electron in the qubit in $E_2(E_1)$ by the gate electrode between these two dots, while the current through the QPC device is $D(D')$. Hence, Δ can be tuned by the back electrodes behind the two quantum dots. The formula Eq. (18) is feasible when the qubit is weakly measured. Moreover, since the QPC device does not damage the state of the qubit, our measurement scheme can protect the information of geometric phase against destruction.

In Fig. 2 we show the geometric phases of the qubit(red solid line) and the results from Eq. (18)(dash-dot line). In these two figures we take modulus of the geometrical phase $\gamma(\tau)$ by π and take π as a unit. The parameters are chosen as $\Omega_0 = 2$, $\Delta = 4$ and $D = 1$. In the upper figure the geometric phase from Eq. (18) matches the exact solution well. The lower figure shows, the geometric phase from our formula differs gradually from the actual one as D' decreases.

The feasibility of the measurement scheme. In this section we proceed to analyze the feasibility of our direct measurement scheme. There are two major factors affecting the measurement result of the

scheme. One is the length change of Bloch vector. If it varies too fast the approximation we used will be invalid. The other one is the current quality measured by the QPC device.

We first analyze the influence of the length change of the Bloch vector. We rewrite Eq. (31) in spherical polar coordinate as

$$\dot{\phi} = -(\Delta + \omega \cos \theta \cos \phi), \quad (19)$$

$$\dot{\theta} = -\cos \theta \left(\frac{\Gamma_d}{2} \sin \theta + \omega \cos \theta \sin \phi \right), \quad (20)$$

$$\dot{r} = -r \frac{\Gamma_d}{2} \sin^2 \theta. \quad (21)$$

Since the differential equation of r is decoupled from the other two equations. The solution of this equation is

$$r(t) = r(0) e^{-\frac{\Gamma_d}{2} \int_0^t \sin^2 \theta(\tau) d\tau}. \quad (22)$$

In Eq. (18) we have assumed that the length change of the Bloch vector is slow enough. The slower the length change of Bloch vector the more accurate Eq. (18) will be. According to Eq. (22), the length change of the Bloch vector is affected by Γ_d and θ . A small Γ_d can be obtained via diminishing the difference of the distances between the QPC and two quantum dots of the qubit. The second factor affecting the length change of Bloch vector is the path trace of the qubit in Bloch sphere. During the evolution, the smaller θ is the more slowly r diminishes. To keep θ small, we need a properly large Δ . Therefore the path trace of the qubit in Bloch sphere approaches the north pole.

The other factor to affect the feasibility of Eq. (18) is the quality of the QPC current. According to Ref. 34 the Signal-to-Noise ratio of our model can be expressed as $\mathcal{R} = \frac{8\Omega_0^2(\Gamma^2 + 4\Delta^2 + \omega_r^2)}{\Gamma^3\omega_r^2 + \Gamma(4\omega_r^2 - 8\Omega_0^2)^2} \frac{(D - D')^2}{D + D'}$. Where $\Gamma = \frac{\Gamma_d}{2}$, $\omega_r = \sqrt{\Delta^2 + 4\Omega_0^2}$. To obtain a high quality measurement current we need a smaller difference between D and D' . This result is consistent with the analysis above.

An application of the direct measurement scheme. Recently, Yin and Tong have studied the effects of environment parameters on the geometric phase of quantum dot systems^{22,23}. Moreover, in Ref. 23 a model similar to ours is studied, in which the QPC device is replaced by a SET. In this section, as an application of our scheme we investigate how to simulate the time evolution of the geometric phase in this model via Eq. (18). Further, We provide a method to determine the parameters, with which we can obtain the geometric phase from our model.

In case that there is no backaction²³. With definitions $\rho_{11} = 1 - \rho_{22} = \varrho_{11} + \varrho_{22}$ and $\rho_{12} = \rho_{21}^* = \varrho_{13} + \varrho_{24}$ the master equation can be simplified as

$$\dot{\rho}_{11} = -is(\rho_{12} - \rho_{21}), \quad (23)$$

$$\dot{\rho}_{22} = -is(\rho_{21} - \rho_{12}), \quad (24)$$

$$\dot{\rho}_{12} = -i\epsilon_0\rho_{12} - is(\rho_{11} - \rho_{22}) - iU\varrho_{24}, \quad (25)$$

$$\dot{\varrho}_{24} = -(\Gamma_L + \Gamma_R + i\epsilon_0 + iU)\varrho_{24} + \Gamma_L\rho_{12} - is(\varrho_{22} - \varrho_{44}). \quad (26)$$

For simplicity, here we choose a condition that the coupling strength of the left lead to QD_0 is smaller than the strength of DQ_0 to right lead ($\Gamma_L = 1$, $\Gamma_R = 8$). Under this condition QD_0 have a very small probability to be occupied. Therefore, $\varrho_{22} - \varrho_{44} \simeq 0$ and the variation of ϱ_{24} is very little, namely, $\dot{\varrho}_{24} \simeq 0$. Hence, we can adiabatically replace ϱ_{24} in Eq. (25) by $\varrho_{24} = \frac{\Gamma_L}{\Gamma_L + \Gamma_R + i\epsilon_0 + iU}\rho_{12}$. Then we obtain an effective equation of motion as

$$\dot{\rho}_{11} = -is(\rho_{12} - \rho_{21}), \quad (27)$$

$$\dot{\rho}_{22} = -is(\rho_{21} - \rho_{12}), \quad (28)$$

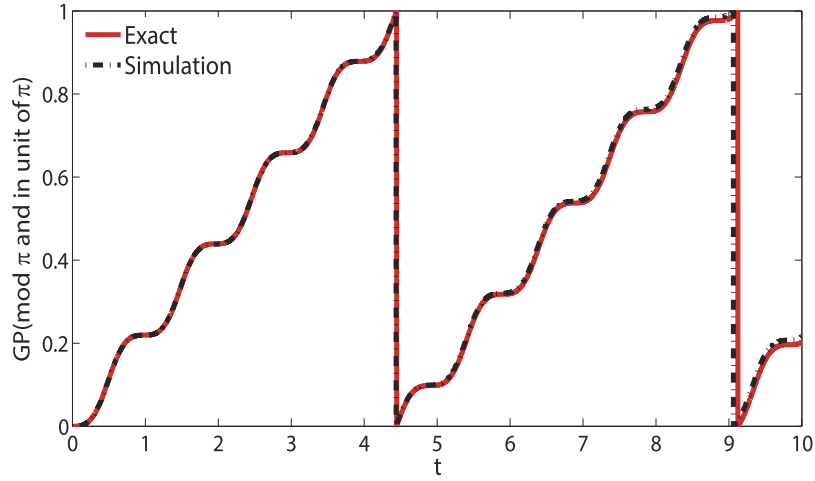


Figure 3. In this figure we simulate the time evolution of geometric phase of Yin and Tong’s model (red solid line) with Eq. (18) (dash-dot line). The parameters are chosen as $s = 2$, $\epsilon_0 = 5$, $\Gamma_L = 1$, $\Gamma_R = 8$ and $U = 0.1$.

$$\dot{\rho}_{12} = -i \left[\epsilon_0 + \frac{U\Gamma_L(\Gamma_L + \Gamma_R)}{(\Gamma_L + \Gamma_R)^2 + (\epsilon_0 + U)^2} \right] \rho_{12} - is(\rho_{11} - \rho_{22}) - \frac{U\Gamma_L(\epsilon_0 + U)}{(\Gamma_L + \Gamma_R)^2 + (\epsilon_0 + U)^2} \rho_{12} \tag{29}$$

Obviously, this master equation has a similar form as Eq. (7–9). Hence, these two master equations have the same steady state. Therefore, we can simulate the time evolution of geometric phase with Eq. (18). Comparing these two master equations we obtain parameters $\Omega_0 = -s\Delta = -\left[\epsilon_0 + \frac{U\Gamma_L(\Gamma_L + \Gamma_R)}{(\Gamma_L + \Gamma_R)^2 + (\epsilon_0 + U)^2} \right]$ and $\Gamma_d = 2\frac{U\Gamma_L(\epsilon_0 + U)}{(\Gamma_L + \Gamma_R)^2 + (\epsilon_0 + U)^2}$, with which we can obtain the geometric phase from our setup.

In Fig. 3 we compare the exact geometric phase from the model of Ref. 23 (red solid line) and the result from Eq. (18) (dash-dot line). In this figure the parameters are chosen as $s = 2$, $\epsilon_0 = 5$, $\Gamma_L = 1$, $\Gamma_R = 8$ and $U = 0.1$.

Discussion

In conclusion, we have proposed a direct measurement scheme on the geometric phase of a double quantum dot qubit via the QPC current. An effective formula, which relates the geometric phase to the QPC current has been derived. All parameters in our expression are measurable in experiment. Moreover, since the QPC device affects the state of the qubit slightly, our measurement procession protects the geometric phase from destruction. The feasibility of the scheme has been studied. When the QPC measurement is weak, the measurement scheme will be feasible. As an application of our theory, we simulate the evolution of the geometric phase of the model in Ref. 23, in which the QPC is replaced by a SET. This simulation shows the usefulness of our scheme. This investigation should be helpful to design experiment setups based on quantum dot systems, which can measure the information of geometric phase without damaging the phase.

Methods

For Eq. (18), we map master equation Eq. (10) onto the Bloch sphere. Under the Cartesian coordinate system the new master equation in this space is

$$\begin{pmatrix} \dot{r}_x \\ \dot{r}_y \\ \dot{r}_z \end{pmatrix} = \begin{pmatrix} -\frac{\Gamma_d}{2} & \Delta & 0 \\ -\Delta & -\frac{\Gamma_d}{2} & -2\Omega_0 \\ 0 & 2\Omega_0 & 0 \end{pmatrix} \begin{pmatrix} r_x \\ r_y \\ r_z \end{pmatrix} \tag{30}$$

Here we define $r_x = \rho_{12} + \rho_{21}$, $r_y = i(\rho_{12} - \rho_{21})$, $r_z = \rho_{11} - \rho_{22}$, $\omega = 2\Omega_0$ and $\Delta = E_2 - E_1$. Under spherical polar coordinate system we have $r_x = r \cos\theta \cos\phi$, $r_y = r \sin\theta \sin\phi$ and $r_z = r \cos\theta$. Master equation Eq. (30) can be rewritten as

$$\begin{pmatrix} r \cos \theta \cos \phi & -r \sin \theta \sin \phi & \sin \theta \cos \phi \\ r \cos \theta \sin \phi & r \sin \theta \cos \phi & \sin \theta \sin \phi \\ -r \sin \theta & 0 & \cos \theta \end{pmatrix} \begin{pmatrix} \dot{\theta} \\ \dot{\phi} \\ \dot{r} \end{pmatrix} = \begin{pmatrix} -\frac{\Gamma_d}{2} & \Delta & 0 \\ -\Delta & -\frac{\Gamma_d}{2} & -\omega \\ 0 & \omega & 0 \end{pmatrix} \begin{pmatrix} r \sin \theta \cos \phi \\ r \sin \theta \sin \phi \\ r \cos \theta \end{pmatrix}. \tag{31}$$

If the decoherence rate Γ_d is small. In a short time scale, the path trace of Eq. (30) approximately parallel to the path trace of a close system, where $\Gamma_d = 0$. We first study the dynamics of this close system. Under initial condition $\rho_{11} = 1$ and $\rho_{22} = \rho_{12} = \rho_{21} = 0$, the solution of the closed system reads

$$\vec{r}(t) = \begin{pmatrix} \frac{\Delta\omega}{\omega_r^2}(\cos\omega_r t - 1) \\ -\frac{\omega}{\omega_r}\sin\omega_r t \\ -\frac{1}{\omega_r^2}(\Delta^2 + \omega^2\cos\omega_r t) \end{pmatrix}. \tag{32}$$

Here $\omega_r = \sqrt{\Delta^2 + \omega^2}$ is the Rabi frequency of the qubit. The path trace in Bloch sphere when $\tau = \frac{n\pi}{\omega_r}, \frac{(2n+1)\pi}{2\omega_r}$ passes two point on the xoz plane

$$\vec{r}\left(\frac{n\pi}{\omega_r}\right) = \begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix}, \vec{r}\left(\frac{(2n+1)\pi}{2\omega_r}\right) = \begin{pmatrix} -2\frac{\Delta\omega}{\omega_r^2} \\ 0 \\ \frac{\Delta^2 - \omega^2}{\omega_r^2} \end{pmatrix}. \tag{33}$$

Further, since the orbit is perpendicular to the yoz plane, we can parameterize the projection of the orbit on xoz coordinate plane

$$\frac{r_x - r_x(0)}{r_z - r_z(0)} = \frac{r_x}{r_z - 1} = \frac{\Delta}{\omega}. \tag{34}$$

According to the initial condition we have

$$r_x = \frac{\Delta}{\omega}(r_z - 1). \tag{35}$$

If the length of the Bloch vector \vec{r} changes slowly. In a short time scale we can omit the length change of the Bloch vector, namely, $r \equiv 1$. With (31) and (35) we obtain an effective formula of the azimuth angle

$$\dot{\phi} = -(\Delta + \omega \cot \theta \cos \phi) = -\left(\Delta + \omega \frac{r_x r_z}{|r|^2 - r_z^2}\right) \Bigg|_{r=1} \simeq -\frac{\Delta}{1 + r_z}. \tag{36}$$

Further, in a short time scale we have $r_z \simeq \cos \theta(r=1)$. Finally by using all these approximations we obtain an expression of the geometrical phase as

$$\gamma(\tau) = \int_0^\tau \frac{\Delta}{2} \frac{1 - r_z}{1 + r_z} dt. \tag{37}$$

According to the expression of current Eq. (11), r_z can be rewritten as

$$r_z = \rho_{11} - \rho_{22} = 1 - 2\frac{I - D'}{D - D'}. \tag{38}$$

Insert this expression into Eq. (37), we obtain formula Eq. (18).

References

- Z. H. Chen, B. Liu, F. Y. Zhang & H. S. Song Generating three-dimensional entanglement for atomic ensembles trapped in two separated cavity via an optical fiber. *Int. J. Theor. Phys* **52**, 3276 (2013); doi: 10.1007/s10773-013-1624-1.
- F. Y. Zhang, B. Liu, Z. H. Chen, S. L. Wu & H. S. Song Controllable quantum information network with a superconducting system. *Ann. Phys. (N.Y.)* **346**, 103 (2014); doi: 10.1016/j.aop.2014.04.008.
- F. Dolde, H. Fedder *et al.* Electric-field sensing using single diamond spins. *Nat. Phys* **7**, 459 (2011); doi: 10.1038/nphys1969.
- E. Togan, Y. Chu *et al.* Quantum entanglement between an optical photon and a solid-state spin qubit. *Nature* **466**, 730 (2010); doi: 10.1038/nature09256.
- P. Neumann, J. Beck *et al.* Single-Shot Readout of a Single Nuclear Spin. *Science* **329**, 542 (2010); doi: 10.1126/science.1189075.
- D. Press, T. D. Ladd, B. Zhang & Y. Yamamoto Complete quantum control of a single quantum dot spin using ultrafast optical pulses. *Nature (London)* **456**, 218 (2008); doi: 10.1038/nature07530.
- P. San-Jose, B. Scharfenberger *et al.* Geometric phases in semiconductor spin qubits: Manipulations and decoherence. *Phys. Rev. B* **77**, 045305 (2008); doi: 10.1103/PhysRevB.77.045305.
- L. B. Chen & W. Yang All-optical controlled phase gate in quantum dot molecules. *Laser. Phys. Lett* **11**, 105201 (2014); doi: 10.1088/1612-2011/11/10/105201.
- D. Schuster, A. Wallraff *et al.* ac Stark Shift and Dephasing of a Superconducting Qubit Strongly Coupled to a Cavity Field. *Phys. Rev. Lett* **94**, 123602 (2005); doi: 10.1103/PhysRevLett.94.123602.
- S. A. Gurvitz & G. P. Berman Single qubit measurements with an asymmetric single-electron transistor. *Phys. Rev. B* **72**, 073303 (2005); doi: 10.1103/PhysRevB.72.073303.
- J. Lu & L. Zhou Non-Abelian geometrical control of a qubit in an NV center in diamond. *Eur. Phys. Lett* **102**, 30006 (2013); doi: 10.1209/0295-5075/102/30006.
- M. V. Berry Quantal Phase Factors Accompanying Adiabatic Changes. *Proc. R. Soc. London, Ser. A* **392**, 45–57 (1984); doi: 10.1098/rspa.1984.0023.
- Y. Aharonov & J. Anandan Phase change during a cyclic quantum evolution. *Phys. Rev. Lett* **58**, 1593 (1987); doi: 10.1103/PhysRevLett.58.1593; J. Anandan and Y. Aharonov Geometric quantum phase and angles. *Phys. Rev. D* **38**, 1863 (1988); doi: 10.1103/PhysRevD.38.1863.
- J. Samuel & R. Bhandari General Setting for Berry's Phase. *Phys. Rev. Lett* **60**, 2339 (1988); doi: 10.1103/PhysRevLett.60.2339.
- J. Jones, V. Vedral, A. K. Ekert & C. Castagnoli Geometric quantum computation using nuclear magnetic resonance. *Nature (London)* **403**, 869 (2000); doi: 10.1038/35002528.
- E. Sjöqvist, A. K. Pati *et al.* Geometric Phases for Mixed States in Interferometry. *Phys. Rev. Lett* **85**, 2845 (2000); doi: 10.1103/PhysRevLett.85.2845.
- S. Puri, N. Y. Kim & Y. Yamamoto Two-qubit geometric phase gate for quantum dot spins using cavity polariton resonance. *Phys. Rev. B* **85**, 241403 (2012); doi: 10.1103/PhysRevB.85.241403.
- K. Singh, D. M. Tong *et al.* Geometric phases for nondegenerate and degenerate mixed states. *Phys. Rev. A* **67**, 032106 (2003); doi: 10.1103/PhysRevA.67.032106.
- D. M. Tong, E. Sjöqvist, L. C. Kwek & C. H. Oh Kinematic Approach to the Mixed State Geometric Phase in Nonunitary Evolution. *Phys. Rev. Lett* **93**, 080405 (2004); doi: 10.1103/PhysRevLett.93.080405.
- X. X. Yi, L. C. Wang & T. Y. Zheng Berry Phase in a Composite System. *Phys. Rev. Lett* **92**, 150406 (2004); doi: 10.1103/PhysRevLett.92.150406.
- S. L. Wu, X. L. Huang, L. C. Wang & X. X. Yi Information flow, non-Markovianity, and geometric phases. *Phys. Rev. A* **82**, 052111 (2010); doi: 10.1103/PhysRevA.82.052111.
- S. Yin & D. M. Tong Geometric phase of a quantum dot system in nonunitary evolution. *Phys. Rev. A* **79**, 044303 (2009); doi: 10.1103/PhysRevA.79.044303.
- S. Yin & D. M. Tong The effect of the environment parameters on the geometric phase of a quantum dot system. *J. Phys. A: Math. Theor* **43**, 305303 (2010); doi: 10.1088/1751-8113/43/30/305303.
- M. H. Devoret & R. J. Schoelkopf review article Amplifying quantum signals with the single-electron transistor. *Nature (London)* **406**, 1039 (2000); doi: 10.1038/35023253.
- Yu. Makhlin, G. Schön & A. Shnirman Quantum-state engineering with Josephson-junction devices. *Rev. Mod. Phys* **73**, 357 (2001); doi: 10.1103/RevModPhys.73.357.
- S. A. Gurvitz & Ya. S. Prager Microscopic derivation of rate equations for quantum transport. *Phys. Rev. B* **53**, 15932 (1996); doi: 10.1103/PhysRevB.53.15932.
- S. A. Gurvitz Rate equations for quantum transport in multidot systems. *Phys. Rev. B* **57**, 6602(1998); doi: 10.1103/PhysRevB.57.6602.
- S. A. Gurvitz Quantum mechanical approach to decoherence and relaxation generated by fluctuating environment. *Phys. Rev. B* **77**, 075325 (2008); doi: 10.1103/PhysRevB.77.075325.
- S. A. Gurvitz Lapse of transmission phase and electron molecules in quantum dots. *Phys. Rev. B* **77**, 201302R (2008); doi: 10.1103/PhysRevB.77.201302.
- S. K. Wang, H. J. Jiao, F. Li & X. Q. Li. Full counting statistics of transport through two-channel Coulomb blockade systems. *Phys. Rev. B* **76**, 125416 (1996); doi: 10.1103/PhysRevB.76.125416.
- R. X. Xu, P. Cui *et al.* Exact quantum master equation via the calculus on path integrals. *J. Chem. Phys* **122**, 041103 (2005); doi: 10.1063/1.1850899.
- Y. M. Blanter & M. Büttiker Shot noise in mesoscopic conductors. *Phys. Rep* **336**, 2 (2000); doi: 10.1016/S0370-1573(99)00123-4.
- X. Q. Li, P. Cui & Y. J. Yan Spontaneous Relaxation of a Charge Qubit under Electrical Measurement. *Phys. Rev. Lett* **94**, 066803 (2005); doi: 10.1103/PhysRevLett.94.066803.
- A. N. Korotkov & D. V. Averin Continuous weak measurement of quantum coherent oscillations. *Phys. Rev. B* **64**, 165310 (2001); doi: 10.1103/PhysRevB.64.165310.

Acknowledgements

This work was supported by the National Natural Science Foundation of China under grants (Grant No. 11175033, No. 11274036 and No. 11322542) and the MOST (Grant No. 2014CB848700). Z. F. Y was supported by the National Science Foundation of China under Grants Nos. 11447135 and the Fundamental Research Funds for the Central Universities No. DC201502080407.

Author Contributions

B.L. and F.Y.Z. proposed the model. B.L. calculates the system properties while B.L., F.Y.Z. and J.S. provide the technology advices. B.L., J.S. and H.S.S. analyzed the results. B.L. wrote the paper.

Additional Information

Competing financial interests: The authors declare no competing financial interests.

How to cite this article: Liu, B. *et al.* Direct measurement on the geometric phase of a double quantum dot qubit via quantum point contact device. *Sci. Rep.* **5**, 11726; doi: 10.1038/srep11726 (2015).



This work is licensed under a Creative Commons Attribution 4.0 International License. The images or other third party material in this article are included in the article's Creative Commons license, unless indicated otherwise in the credit line; if the material is not included under the Creative Commons license, users will need to obtain permission from the license holder to reproduce the material. To view a copy of this license, visit <http://creativecommons.org/licenses/by/4.0/>