



Published in final edited form as:

*Int J Min Sci Technol.* 2021 January ; 31(1): 117–126. doi:10.1016/j.ijmst.2020.12.014.

## The current perspective of the PA 1957 gas well pillar study and its implications for longwall gas well pillars

Peter Zhang<sup>a,\*</sup>, Daniel Su<sup>a</sup>, Chris Mark<sup>b</sup>

<sup>a</sup>CDC NIOSH, Pittsburgh Mining Research Division, Pittsburgh, PA 15236, USA

<sup>b</sup>Mine Safety and Health Administration, Pittsburgh, PA 15217, USA

### Abstract

Many states rely upon the Pennsylvania 1957 Gas Well Pillar Study to evaluate the coal barrier surrounding gas wells. The study included 77 gas well failure cases that occurred in the Pittsburgh and Freeport coal seams over a 25-year span. At the time, coal was mined using the room-and-pillar mining method with full or partial pillar recovery, and square or rectangle pillars surrounding the gas wells were left to protect the wells. The study provided guidelines for pillar sizes under different overburden depths up to 213 m (700 ft). The 1957 study has also been used to determine gas well pillar sizes in longwall mines since longwall mining began in the 1970 s. The original study was developed for room-and-pillar mining and could be applied to gas wells in longwall chain pillars under shallow cover. However, under deep cover, severe deformations in gas wells have occurred in longwall chain pillars. Presently, with a better understanding of coal pillar mechanics, new insight into subsidence movements induced by retreat mining, and advances in numerical modeling, it has become both critically important and feasible to evaluate the adequacy of the 1957 study for longwall gas well pillars. In this paper, the data from the 1957 study is analyzed from a new perspective by considering various factors, including overburden depth, failure location, failure time, pillar safety factor (SF), and floor pressure. The pillar SF and floor pressure are calculated by considering abutment pressure induced by full pillar recovery. A statistical analysis is performed to find correlations between various factors and helps identify the most significant factors for the stability of gas wells influenced by retreat mining. Through analyzing the data from the 1957 study, the guidelines for gas well pillars in the 1957 study are evaluated for their adequacy for room-and-pillar mining and their applicability to longwall mining. Numerical modeling is used to model the stability of gas wells by quantifying the mining-induced stresses in gas well casings. Results of this study indicate that the guidelines in the 1957 study may be appropriate for pillars protecting conventional gas wells in both room-and-pillar mining and longwall mining under overburden depths up to 213 m (700 ft), but may not be sufficient for protective pillars under deep cover. The current evaluation of the 1957 study provides not only insights about potential gas well failures caused by retreat mining but also implications for what critical considerations should be taken into account to protect gas wells in longwall mining.

This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

\*Corresponding author: nmb2@cdc.gov (P. Zhang).

Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

## Keywords

Gas well pillar; Pennsylvania 1957 gas well pillar study; Room-and-pillar mining; Longwall mining

---

## 1. Introduction

Coal, oil, and natural gas have co-existed for more than a century in the Northern Appalachian coalfields of Pennsylvania, West Virginia, and Ohio. In 1913, the U.S. Bureau of Mines held a conference on the topic in Pittsburgh, Pennsylvania, with operators from both industries. The Proceedings from this conference cited instances of mine explosions attributed to wells that permitted gas migration through the mine floor, well failures in insufficiently supported areas of mining panels, and active and abandoned wells intersected by mine development [1]. George S. Rice, Chief Mining Engineer, U.S. Bureau of Mines, opened an October 1914 discussion on the topic by stating, “Undoubtedly there is a serious problem through the juxtaposition of gas and oil wells and coal mines, not only at the present time, but possibly of far more serious import for the future [2].”

The ensuing decades have no recorded instances and reports of wells causing gas inundations in mines but coal mining did cause a number of well failures. In 1955, the Commonwealth of Pennsylvania addressed these and other concerns by passing the Gas Operations, Well-Drilling, Petroleum, and Coal Mining Act. The Act required that a pillar of coal be left around any oil or gas well that penetrated an active coal mine. The Act only defined the maximum size of pillar to be left, however, and did not specify the minimum pillar size. Accordingly, the Joint Coal and Gas Committee was formed in 1956 to conduct a cooperative engineering study to develop specific recommendations regarding the size of protective gas well pillars.

## 2. The 1957 gas well failure data set

The Joint Coal and Gas Committee solicited information on well failures from the oil and gas companies and then obtained mining data on each of the case histories from the coal companies [3]. The data set initially consisted of 77 case histories of gas well failures. Three of the cases were considered “not useable” because they involved a gob well or mining into the well, and two more did not have sufficient data for analysis. The definition of “failure” for the remaining wells was that they stopped producing gas because they were “sheared or pinched off.” Presumably, the well blockages were confirmed by attempts to re-enter the well, because the location (depth in the well) of the failure is recorded in each case. The report does not make any mention of gas inundations associated with any of the well failures.

The mining in all but three of the cases occurred between 1925 and 1956. At the start of that period nearly all the coal in the United States was loaded by hand, but by the end of the span of years, loading machines were used for more than 80% of underground production. Even in 1956, however, continuous miners were still in their infancy [4]. Well failures occurred at an almost constant rate over the three-decade study period.

Most of the case histories in the study were from the Pittsburgh seam in southwestern PA, with a sprinkling of cases from the Freeport seam. In 1935, the Bureau of Mines published a detailed study of the mining methods used in the Pittsburgh seam. Except for a handful of small mines in Ohio and the West Virginia panhandle, every mine they studied employed one of a large variety of full pillar recovery techniques, and typically recovered more than 80% of the coal [5]. Fig. 1 is a portion from a mine map dating from the 1930s that shows three gas wells and the protective pillars left around them. The pillars are essentially islands entirely surrounded by caved gob. Only 13 of the case histories in the 1957 data set were described as partial extraction, apparently development only, with a reported extraction of about 50% of the coal. The others involved pillar recovery, with reported extraction ratios averaging 90%.

The “minimum mining radius” (setback distance) was defined as “the shortest distance from the well on the surface to a mined-out area.” Fig. 2 plots the setback distance against the depth of cover for the entire data set. It shows that a number of the partial recovery cases fall at the extremes of the data set. Three of these partial recovery cases had the largest setback distances in the data set, another has the smallest, and two had the shallowest depths of cover. It seems likely that atypical failure mechanisms were at work in these case histories. Therefore, the partial pillar cases were excluded from the current re-analysis, leaving 59 cases in the final data set for this analysis.

The mining heights in the remaining case histories ranged from 1.5 to 2.4 m (5 to 8 ft), and the depth of cover was less than 198 m (650 ft) in all but three cases. As the report noted, “no failures were reported from thinner seams.” The floor was described as fireclay in almost all the case histories, though in only 15 cases was it described as both “soft” and “wet.” The surface topography was described as a “steep slope” in just one case, and in all the others it was a “gentle slope,” the “top of a hill,” or “level.” The minimum mining radius averaged 11.5 m (38 ft), and it only exceeded 15 m (50 ft) in a couple of cases. The smallest pillar dimension (width) of the protective pillar was between 15 and 30 m (50 and 100 ft) in 85% of the cases.

The 1957 report’s authors noted that they originally expected to find that failures would have “occurred above the coal horizon, [caused] by the action of the draw” (subsidence). However, the great majority of the failures occurred within or below the seam, leading them to conclude that “pillar failure was the cause of the damage.” Of the 54 full extraction cases for which data is available, only 10 failures actually occurred in the roof, compared with 24 in the seam and 20 below the seam. All of the failures in the roof occurred within 30 m (100 ft) of the seam, while the deepest floor failure was 10.3 m (34 ft) below the seam.

Of the 46 cases for which data was available, approximately half occurred during or within two years of the completion of mining. Surprisingly, nearly 40% occurred more than five years after mining. Fig. 3 plots the time to failure of the case histories against their depth of cover. Fig. 3 indicates that while failures seem to occur sooner under deeper cover, the location of the failure is only weakly correlated with the time elapsed.

### 3. Statistical analysis of the 1957 study data

Figs. 2 and 3 indicate that there are no strong trends that are immediately apparent within the 1957 data set. A detailed statistical evaluation was conducted to test whether subtle trends could be discerned. Prior to the analysis, several new parameters were calculated using the data: (1) support angle (calculated as the arctangent of the minimum mining radius divided by the seam depth), (2) average pillar stress (calculated assuming full extraction in all directions around the support pillar (see Fig. 4), and (3) pillar safety factor (calculated using the Mark-Bieniawski pillar strength formula and the average pillar stress).

Pairwise correlations were done for the entire data set (see Table 1) and then for several subgroups. As expected, the depth of cover, support angle, average pillar stress, and pillar safety factor (SF) all correlated with each other in every analysis. Some more meaningful correlations were:

- (1) Under deeper cover, failures tended to occur rapidly (see Fig. 3).
- (2) When the floor was reported to be soft (weak and wet), there was some tendency for failures to occur later (Fig. 3) and to be located in or below the seam (Fig. 5).
- (3) Failures in the roof occurred at shallow and moderate depths, but none occurred when the depth exceeded 167 m (550 ft) (Fig. 2).

Pairwise correlations test only the relationships between two variables at a time. Evaluating the simultaneous relationships between all the variables requires multivariate techniques. Logistic regression was used in this instance. Logistic regression requires a dichotomous (two-level) outcome variable. However, since all of the cases in the 1957 data set are failures, some other outcome must be analyzed. Two other outcomes are available: (1) Location of failure (roof versus coal/floor), and (2) Time to failure (failure delayed more than 5 years versus failure during or within 5 years of mining).

Neither of these models resulted in convincing goodness-of-fit values. The best result indicated that delayed failure was associated with shallower depths of cover, but this result was already observed in Fig. 3 and in the pairwise evaluations.

In summary, it does not appear that in-depth re-evaluation of the 1957 database via statistics reveals much new information. The 8° failure envelope identified by the Committee remains the most useful trend within the data (Fig. 6). Another observation, again first noted by the Committee, is the scarcity of overburden failures within this data set. Given the recent insights into unconventional subsidence, the apparent lack of such failures warrants explanation.

### 4. Evaluation of the 1957 study for room-and-pillar mining

After the 1957 guidelines were adopted for gas well pillar sizes in room-and-pillar mining, few cases of gas well failures were reported in Pennsylvania. The improvement of gas well stability was largely attributed to larger pillar sizes required by the guidelines. The change in mining practice in room-and-pillar mining after the 1950 s may also have contributed to the

stability of gas wells. With wide use of continuous miners for coal cutting and roof bolters for roof bolting, standard panels were laid out and barrier pillars and stumps were left in places where pillars were previously fully recovered. Narrower panels and stumps would have helped gas well stability by reducing the amount of subsidence as well as abutment pressure.

On the other hand, it is possible that gas wells were only considered failures if gas production was significantly affected by mining. Mining could still have caused large deformations in gas well casings, but unless the wells were inspected there would have been no way of knowing.

The 1957 study showed that gas well failures can be located in the roof, in the pillars, or in the floor. In the paragraphs below, each of those potential locations will be evaluated using the 1957 data and guidelines. In addition, numerical modeling will be used to calculate induced stress in gas well casings for comparison with the strength of the casings.

Fig. 7 shows the pillar sizing guidelines presented in the 1957 study. Pillar SF values are calculated for each of the pillar configurations shown, using the loading model illustrated in Fig. 4. Fig. 8 compares those calculated SF values with the SF of the pillars in the 1957 database. Fig. 8 shows that the guidelines result in SF values that are greater than 2.0 when overburden depth is less than 137 m (450 ft), but the values reduce to about 1.0 when overburden depth is greater than 167 m (550 ft), due to the presence of entries within the pillar bearing area. At these greater depths the gas well is still surrounded by a 100-by-100-foot-wide solid pillar with a width-to-height ratio of about 15. Such a squat pillar will deform in response to a large load, but it should not collapse.

Minimum distances from the gob can also be calculated from the 1957 data set. The distance to the gob not only affects the induced vertical pressure at the gas well but also the amount of subsurface strata movements at the well. By increasing pillar bearing area and placing gas wells at the center of the pillars, the 1957 guidelines moved gas wells away from the peak abutment pressure zone and also further away from gob. As shown in Fig. 9, the gob distances set by the 1957 guidelines exceed those in nearly all the failure cases, especially under deep cover. However, the 1957 study also defined a maximum setback distance of 15 m (50 ft) from the nearest entry, and a number of the failures did maintain a 50-foot setback.

The 1957 study showed that about 82% of the gas well failures occurred within 6 m (20 ft) of the coal seam horizon. Those failures are largely associated with high pressure in the coal seam and floor. The 1957 guidelines reduced the possibility of failures around the coal seam horizon by reducing pillar and floor pressure as shown in Fig. 10. Following the 1957 guidelines, the average pillar and floor pressures increase linearly with overburden depth. Under deep cover, the average pillar/floor pressure is high in the worst case with gobs on four sides of the pillar, and gas well failures are still possible.

In addition to the evaluation of pillar stability and floor pressure, it is also important to evaluate the response of the gas well casings to the abutment pressure and subsurface movements. To calculate induced stresses in gas well casings utilizing the 1957 guidelines, FLAC3D modeling [6] is used to model vertical stress distribution over the gas well pillars,

as well as response of gas well casings to abutment pressure and overburden movements in room-and-pillar mining with full pillar recovery. Fig. 11 shows a 3-D view of the FLAC3D model. To evaluate the 1957 guidelines, a single squared gas well pillar is modeled for overburden depth up to 137 m (450 ft) but a squared pillar surrounded by small pillars is modeled for overburden depth greater than 137 m (450 ft). In the 1920 s era, typical gas and oil wells intersecting coal seams had three casings, i.e. production casing, intermediate casing, and coal protection casing [7]. Therefore, three casings are used in the model. The modeling procedure is similar to modeling of gas wells in longwall chain pillars. The model uses typical overburden geology for the Pittsburgh seam. The details of modeling gob material can be found in Tulu et al. [8], and modeling of gas wells in longwall pillars can be found in Zhang et al. [9].

Fig. 12 shows the vertical stress distribution over a gas well pillar surrounded by gob on two and four sides of the pillar under 213-m (700-ft) overburden depth. The calculated vertical stress is about 10.3 MPa (1500 psi) with gob on two sides and about 16.5 MPa (2400 psi) with gob on four sides. Other cases are also modeled for gas well pillars following the 1957 guidelines for overburden depth from 106 to 213 m (350 to 700 ft).

Von Mises stress is a widely used criterion for steel failure, and an equivalent von Mises stress calculated in FLAC3D is used for casing yielding. Fig. 13 shows the predicted induced vertical stress in the pillars at the gas well and the predicted induced maximum von Mises stress in the coal protection casing under different overburden depths. The pillar sizes under different overburden depths follow the 1957 guidelines. The induced vertical stress in the pillar at the gas well increases with overburden depth, with a predicted maximum induced vertical stress of 16.2 MPa (2350 psi) when overburden depth is 213 m (700 ft). The induced von Mises stress also increases with overburden depth, such that when overburden depth is greater than 137 m (450 ft), the predicted induced von Mises stress in the coal protection casing could exceed the ultimate strength of the casing, in which case large casing deformation could occur. The amount of the induced stress in the coal protection casing demonstrates that even though the gas well pillar sizes follow the 1957 guidelines, casing yielding and large deformation could still occur when full pillar recovery is performed on four sides of the gas well pillars.

In summary, the 1957 guidelines greatly helped prevent gas well failures in room-and-pillar retreat mining under overburden depth less than 213 m (700 ft) by ensuring large pillars and maintaining appropriate setback distance to the gob as well as sufficiently low floor pressure. However, the guidelines are not conservative under worst case scenarios, and gas well casing failure can still occur following the guidelines under certain high stress conditions if the gas well pillars are surrounded by retreat gobs on three or four sides.

## 5. Evaluation of the 1957 study for longwall mining

To evaluate the applicability of the 1957 study to longwall mining, it is important to understand that the mining parameters and mining process in the cases of the 1957 study are different than in longwall mining. A comparison of mining parameters of the 1957 cases with those in longwall mining in the Pittsburgh seam is shown in Table 2. Mining depths in

the 1920 s – 1950 s were typically much shallower than depths of current longwall mining in the Pittsburgh seam. As much of the mining was done by drilling, blasting, and hand loading, the mining height was also restricted to only the Pittsburgh coal thickness. Because of equipment size and production demands, modern longwall typically cuts higher than selective mining methods of years past. The mining panels in room-and-pillar mining were generally narrower, though some retreat panels had long break lines. The coal extraction ratio in room-and-pillar mining with full recovery is less than in longwall mining. Room-and-pillar mining generally left coal stumps at pillar corners during pillar recovery, and it is difficult to achieve a 100% coal extraction ratio. Therefore, the surface subsidence caused by pillar recovery under shallow cover was small.

A study by GAI Consultants in 1977 [10] reported that, in western Pennsylvania, total extraction mining of the Pittsburgh coal resulted in long-term subsidence amounting to 0.6 to 0.9 m (2 to 3 ft) maximum for gob areas equaling or exceeding the critical width. The critical width was estimated in western Pennsylvania to be 1.5 to 1.6 times the overburden depth. The surface subsidence caused by pillar recovery also took a longer time to develop. In comparison, modern longwall panels are much wider and the longwall face advances at a much faster rate than room-and-pillar retreat mining, making the subsidence basin supercritical and subsidence period shorter. With wider panels and 100% coal extraction in longwall mining, caving and fracturing in the overburden are also developed higher than in room-and-pillar mining. Therefore, potential gas well failure could occur at higher horizons above the coal seam in longwall mining than in the cases of the 1957 study.

The comparison of room-and-pillar mining and longwall mining shows that both mining methods influence gas well stability by inducing abutment pressure and subsurface movements over gas well pillars, although the magnitude and extent of abutment pressure and subsurface movements are different. As longwall chain pillars have gob on either one or two sides, the gas well pillars and casings are subjected to less influence by the abutment pressure than in full extraction room-and-pillar mining. But larger mining heights and wider panels in longwall mining may increase the horizontal movement in the overburden. As the influence factors to gas wells in longwall mining are similar to room and pillar mining, the potential gas well failures in longwall mining also occur in the coal seam, in the floor, and in the roof or overburden. The failure cases of the 1957 study imply that potential gas well failures are more likely to occur around the coal seam horizon in longwall mining, especially under deep cover. To evaluate the applicability of the 1957 study to longwall mining, the next step is to understand how the chain pillar sizes following the 1957 guidelines affect the stability of gas well casings in the coal seam horizon.

FLAC3D modeling was conducted using typical Pittsburgh seam overburden geology to calculate the induced stress in the pillars and gas well casings. The modeling focused on gas well stability around the coal seam horizon. The chain pillars are developed with a 3-entry system with gas wells located around the center of the chain pillars. The chain pillars have a minimum ACPS pillar safety factor greater than 1.62 under overburden depth of 304 m (1000 ft) with isolated loading. Table 3 shows the numerical modeling results for longwall chain pillars following the 1957 guidelines under different overburden depths up to 304 m (1000 ft).

The numerical model, developed by researchers at the National Institute for Occupational Safety and Health (NIOSH), has been calibrated with several cases for gas well pillars in the Pittsburgh coal seam [9,11–13]. To validate the model for prediction of vertical deformation, the predicted surface subsidence is compared with the measured surface subsidence above the center of the chain pillars in the Pittsburgh coal seam as shown in Fig. 14. The subsidence above the chain pillars was measured under similar mining conditions in the Pittsburgh seam [12,14]. The surface subsidence at the gas well indicates the amount of overburden deformation and chain pillar/floor squeezing due to abutment pressure. The higher the surface subsidence is at the gas well, the higher the induced compressive and shear stresses within and adjacent to the pillar; and thus higher the induced stresses in the gas well casings.

The vertical stress in the coal seam at the gas wells is determined based on the vertical stress distributions over the chain pillars. Fig. 15 shows the vertical stress distribution over the chain pillars under overburden depth of 213 m (700 ft). The predicted vertical stress at the gas well after mining on both sides of the chain pillars is 10.3 MPa (1500 psi). The induced vertical stress in the pillar at the gas well, which is the total vertical stress minus the overburden pressure, is 5.0 MPa (730 psi). Fig. 16 shows the induced von Mises stress along the coal protection casing after mining on both sides of the chain pillars under overburden depth of 213 m (700 ft). With typical overburden geology in the Pittsburgh seam, the maximum von Mises stress occurs at the coal seam horizon, and its value is 352.9 MPa (51181 psi), slightly less than the typical casing yield strength of 379.2 MPa (55000 psi).

Fig. 17 shows the predicted pillar and floor pressure and induced vertical stress at the gas well under different overburden depths. The pillar and floor pressure at the gas well increases almost linearly with overburden depth. When overburden depth is less than 213 m (700 ft), the pillar and floor pressure is less than 10.3 MPa (1500 psi) and the possibility of floor heave is low if the floor is dry. When overburden depth is 274 m (900 ft), the pillar and floor pressure increase to 13.8 MPa (2000 psi), which increases the potential for floor heave. When the overburden depth is greater than 274 m (900 ft), the induced vertical stress is greater than 6.9 MPa (1000 psi). Large deformations in gas well casings have occurred when induced vertical stress at the gas well is greater than 6.9 MPa (1000 psi). The pillar and floor pressure are also calculated for chain pillar sizes following an 8° support angle as shown in Fig. 17. It can be seen that with pillar sizes following an 8° support angle, the induced vertical stress at the gas well only increases slightly with overburden depth.

Fig. 18 shows predicted induced maximum von Mises stress in the coal protection casing under different overburden depth after mining of the first panel and second panel. The maximum induced von Mises stress is 220.6 MPa (32000 psi) up to an overburden depth of 304 m (1000 ft) after mining of the first panel, which is significantly less than the yield strength of gas well casings. The induced von Mises stress in coal protection casing increases greatly after mining of the second panel. When overburden depth is less than 228 m (750 ft), the induced von Mises stress in the coal protection casing is less than the yield strength of the casing. When overburden depth is 304 m (1000 ft), the induced von Mises stress is over the ultimate strength of the casing. Casing yielding could occur when overburden depth is greater than 228 m (750 ft), but large casing deformations are likely



to be observed when the induced von Mises stress is close to the ultimate strength of the casing.

Two cases of large casing deformation have been documented under overburden depth of 243–304 m (800–1000 ft) as shown in Table 4 [9,15], both of which are included in Figs. 17 and 18. Though the chain pillar sizes in those two cases were not compliant with the 1957 guidelines, the comparison is still valid because the casing stability is based on the induced von Mises stress. The maximum von Mises stress in the coal protection casing is also calculated for the chain pillars following an 8° support angle as shown by the dotted line in Fig. 18. The maximum von Mises stress is slightly above the yield strength but much less than the ultimate strength of the casing when the overburden depth is 243–304 m (800–1000 ft). Therefore, with chain pillars following the 1957 guidelines, casing yielding could occur at deeper cover, but casing deformation would likely be very small.

In summary, when chain pillar sizes meet the 1957 guidelines, gas well casings are likely to be stable in the coal seam horizon under overburden depth less than 213 m (700 ft). When overburden depth is over 228 m (750 ft), casing yielding or large deformation is likely to occur around the coal seam horizon. If the chain pillar sizes follow an 8° support angle, the casings are not likely to experience large deformations under deep cover, but casing yielding could still occur.

## 6. Risks in applying the 1957 guidelines to longwall gas well pillars

The past 60 years has led to both a better understanding of non-conventional subsidence as well as the role played by horizontal slip along weak bedding planes, and the impacts they may have on sensitive imbedded ground structures. Such mechanisms were not well discussed or even considered during the development of the 1957 guidelines, which focused on pillar and floor stability. Even if gas wells are stable near the coal seam horizon, there is still a risk that they could be damaged by overburden movements beyond the setback distances given by the 1957 guidelines. When the Pittsburgh coal seam is shallower than about 182 m (600 ft), gas well stability is potentially influenced more by horizontal strata movements above the pillars, and larger setback distance from the gob may be needed to reduce shear failure in gas well casings. In that case, a risk assessment and additional evaluation has to be conducted based on site-specific geology and mining conditions even though the pillar sizes meet the 1957 guidelines. A risk assessment approach has been proposed by Mark and Rumbaugh [17] to evaluate the risk of gas well failures for longwall mining.

This study focuses on conventional gas wells, but it should be pointed out that the new development of unconventional shale gas wells has changed the risk of gas well failures. Although longwall-induced stresses and deformations are similar for both types of wells, high consequences of unconventional gas well failure would have different requirements for protective pillars and construction of gas well casings.

Natural gas well extraction methods in Pennsylvania have undergone dramatic change since development of the 1957 guidelines. Prior to 2004, gas extraction was achieved through

conventional wells. Conventional wells are vertical boreholes drilled into traditional gas reservoirs such as sandstone or limestone formations with a high porosity and permeability. In the bituminous coal fields of Pennsylvania, these formations tend to be slightly undercharged or have reservoir pressures slightly less than hydrostatic pore pressure.

The first unconventional well was successfully drilled into the Marcellus Shale formation in 2004. “Unconventional” refers to wells drilled into shale formations below the base of the conventional oil and gas formations and are stimulated using hydraulic fracturing. A typical well pad contains clusters of multiple wells, each with horizontal laterals extending through the target formation for up to 6096 m (20000 ft). In addition to being deeper, often at depths greater than 1828 m (6000 ft), pore pressures in the northern zones of the Marcellus shale play are overcharged. In 2010, conventional and unconventional gas well permit applications in Pennsylvania were approximately equal. By 2018, six out of seven well permit applications were for unconventional gas wells.

Changes in technology and the geologic conditions have altered the risks associated with the interaction between coal mines and gas wells in the Pennsylvania coal fields. First, unconventional wells are now the prevailing method of gas extraction and produce significantly higher volumes of gas from deeper, overcharged horizons with much higher pressures. Secondly, unconventional well pads require significant capital investment and produce high volumes of gas over longer periods. Mine operators historically elected to purchase and permanently plug conventional oil and gas wells that obstructed longwall panels and gateroad pillars. Unconventional wells are far more valuable, so permanently plugging clusters of them in advance of mining is not an attractive option. Finally, a recent event during well-drilling activities in southwestern Pennsylvania indicates that ruptures of the production string and protective casings can occur during hydraulic fracturing, and gas can migrate into and through the rock strata for hundreds of meters vertically and laterally. Underground mines in close proximity to unconventional wells would be susceptible to an inundation of gas if safety precautions were not in place to control the risks associated with well completion activities.

## 7. Conclusions

Based on the analysis of gas well failure cases from the 1957 gas well pillar study and numerical modeling of gas well stability in longwall chain pillars, the following conclusions are made:

- (1) The great majority of the conventional well failures in the 1957 study occurred within or just beneath the coal seam.
- (2) The 1957 guidelines greatly helped prevent gas well failures in room-and-pillar retreat mining under overburden depth less than 213 m (700 ft) by ensuring large pillars and maintaining appropriate setback distance to the gob as well as sufficiently low floor pressure.

(3) The 1957 guidelines for gas well pillars in room-and-pillar mining are not conservative in all cases. Under covers deeper than 213 m (700 ft), with pillared gob on three or four sides, gas well failures could still occur.

(4) When the 1957 guidelines are applied to longwall chain pillars, gas wells are generally predicted to be stable in the coal seam horizon if overburden depth is less than 228 m (750 ft), but the risk of gas well failure still exists in the overburden due to potential horizontal strata movements over the chain pillars.

(5) When overburden depth is greater than 228 m (750 ft), gas wells in chain pillars could be damaged even if the chain pillars around gas wells meet the 1957 guidelines.

## 8. Disclaimer


The findings and conclusions in this report are those of the author(s) and do not necessarily represent the official position of the National Institute for Occupational Safety and Health, Centers for Disease Control and Prevention (NIOSH). Mention of any company or product does not constitute endorsement by NIOSH.

The findings and conclusions in this report are those of the author(s) and do not necessarily represent the official position of the Mine Safety and Health Administration (MSHA). Mention of any company or product does not constitute endorsement by MSHA.


## References

- [1]. Rice GS, Hood OP. Oil and gas wells through workable coal beds. Bulletin 65, Petroleum Technology. Washington, DC: U.S. Dept. of Interior, Bureau of Mines; 1913.
- [2]. American Institute of Mining Engineers (AIME). Gas and oil wells through coal seams (A discussion). Transactions of the American Institute of Mining Engineers;1915. p. 87082.
- [3]. Commonwealth of Pennsylvania. Department of Mines and Mineral Industries, Oil and Gas Division. Joint Coal and Gas Committee: Gas Well Pillar Study. Harrisburg, PA; 1957.
- [4]. Mark C The introduction of roof bolting to U.S. underground coal mines (1948–1960): A cautionary tale. In: Proceedings of the 21st International Conference on Ground Control in Mining. Morgantown, WV: West Virginia University; 2002. p. 150–60.
- [5]. Paul JW, Plein LN. Methods of development and pillar extraction in mining the Pittsburgh coal bed in Pennsylvania, West Virginia, and Ohio. IC 6872 U.S. Dept. of the Interior. Bureau of Mines 1935.
- [6]. ITASCA Consulting Group, Inc. FLAC-3D, Version 6.0. User's Guide 2017.
- [7]. Draper J Surface movement in the vicinity of pillars left in gob areas. Preprint at the Annual Meeting of the American Institute of Mining: Metallurgical, and Petroleum Engineers. New York; 1964.
- [8]. Tulu IB, Esterhuizen GS, Mohamed KM, Klemetti TM. Verification of a calibrated longwall model with field measurements. In: Proceedings of the 51st US Rock Mechanics/Geomechanics Symposium. San Francisco: American Rock Mechanics Association; 2017. p. 807–14.
- [9]. Zhang P, Dougherty H, Su D, Trackemas J, Tulu B. Influence of longwall mining on the stability of gas wells in chain pillars. *Int J Min Sci Technol* 2020;30 (1):3–9. [PubMed: 32341807]
- [10]. Consultants GAI. Study and analysis of surface subsidence over the mined Pittsburgh coalbed. Bureau of Mines: A final report prepared for United States Department of the Interior; 1977.
- [11]. Su D Effects of longwall-induced stress and deformation on the stability and mechanical integrity of shale gas wells drilled through a longwall abutment pillar. In: Proceedings of the 35th


- International Conference on Ground Control in Mining. Morgantown, WV: Society for Mining, Metallurgy and Exploration; 2016. p. 119–25.
- [12]. Su D, Zhang P, Van Dyke M, Minoski T. Effects of longwall-induced subsurface deformations on shale gas well casing stability under deep covers. In: Proceedings of the 37th International Conference on Ground Control in Mining. Morgantown, WV: Society for Mining, Metallurgy and Exploration; 2018. p. 63–70.
- [13]. Su D, Zhang P, Dougherty H, Van Dyke M, Minoski T, Schatzel S, Gangrade V, Watkins E, Addis J, Hollerich C. Longwall-induced subsurface deformations and permeability changes – Shale gas well casing integrity implication. In: Proceedings of the 38th International Conference on Ground Control in Mining. Morgantown, WV: Society for Mining, Metallurgy and Exploration; 2019. p. 49–59.
- [14]. Luo Y, Peng S, Chen H. Long-term subsidence over longwall chain pillar systems and its effects on surface structure. In: Proceedings of the 16th International Conference on Ground Control in Mining. Morgantown, WV; 1997. p. 43–9.
- [15]. Scovazzo VA, Moran RP. Gas Well Pillar Study Update. PO 4300311202 and PO 4300400813. Pennsylvania Department of Environmental Protection Bureau Oil Gas Manage 2016.
- [16]. Mark C, Agioutantis Z. Analysis of coal pillar stability (ACPS): A new generation of pillar design software. In: Proceedings of the 37th International Conference on Ground Control in Mining. Morgantown, WV: Society for Mining, Metallurgy and Exploration; 2018. p. 1–6.
- [17]. Mark C, Rumbaugh GM. Assessing risks from mining-induced ground movements near gas wells. *Int J Min Sci Technol* 2020;30(1):11–6.

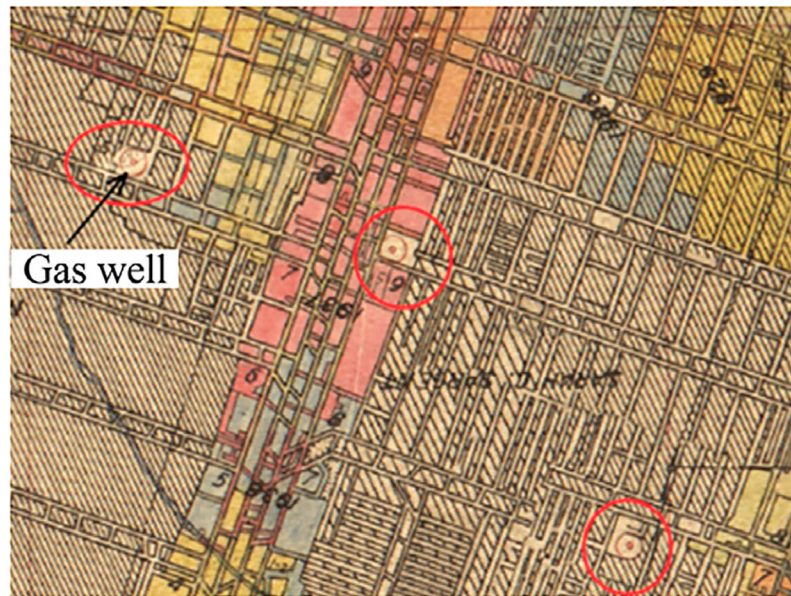


**Fig. 1.** Portion of a mine map from southwestern PA during the hand-loading era, showing three gas well pillars completely surrounded by pillar recovery.

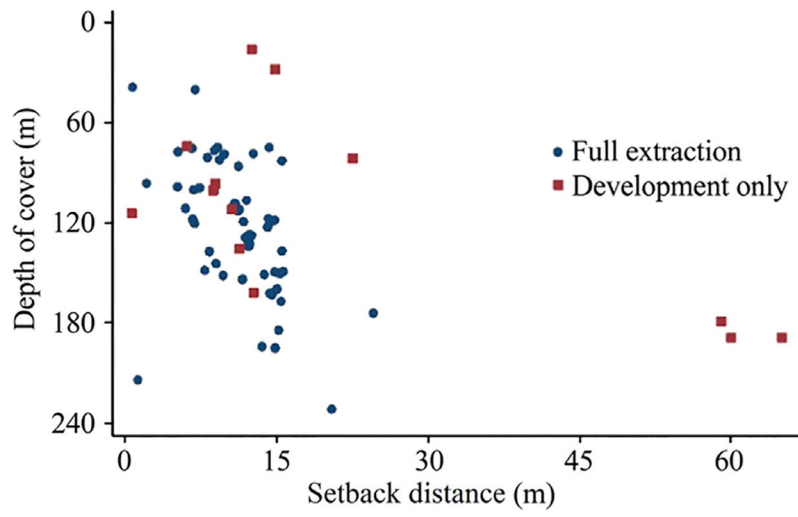

**Fig. 2.** Setback distance and depth of cover for the entire 1957 data set, showing both full and partial extraction (development) case histories.

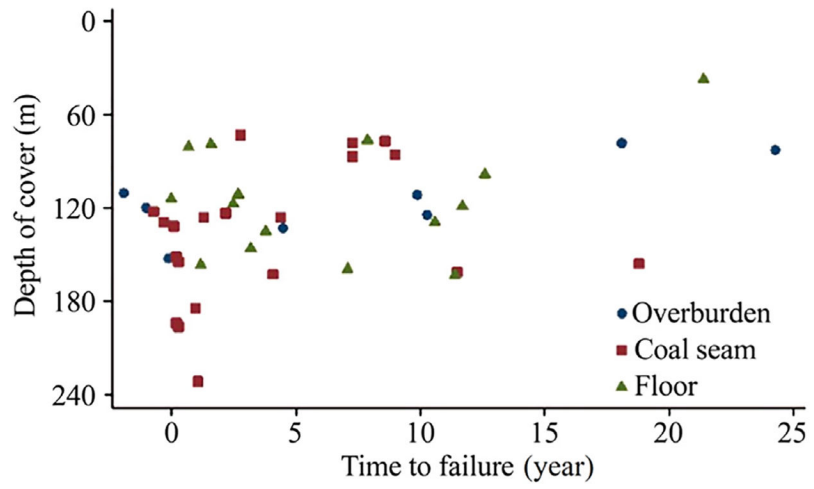

**Fig. 3.** Depth of cover and time to failure of the well failures.

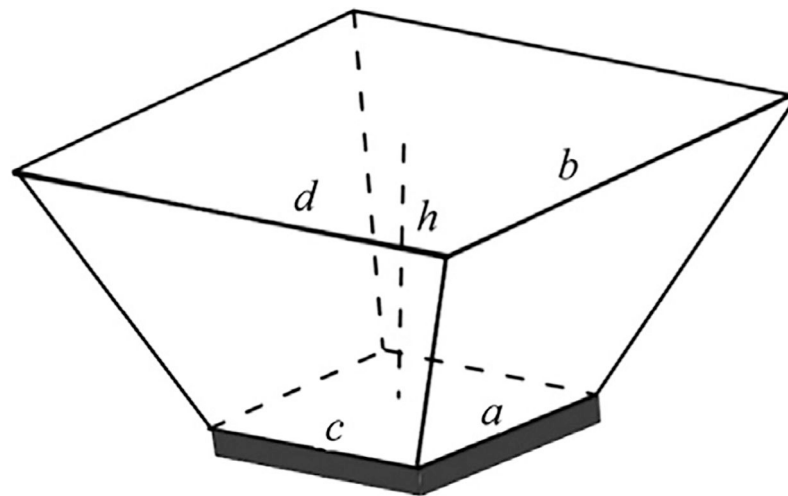


$$V = \frac{1}{3}(a^2 + ab + b^2)h + \frac{1}{2}(a+b)(c-a)h$$

**Fig. 4.**

Schematic of the volume of overburden ( $V$ ) used to calculate the average pillar stress applied to the gas well protective pillars in the data set, where  $h$  is the depth of cover and  $a$  and  $c$  are pillar dimensions. The maximum value of  $d = c + 91.44$  m (300 ft) and of  $b = a + 91.44$  m (300 ft), to account for the effect of barrier pillars and other unmined remnants.



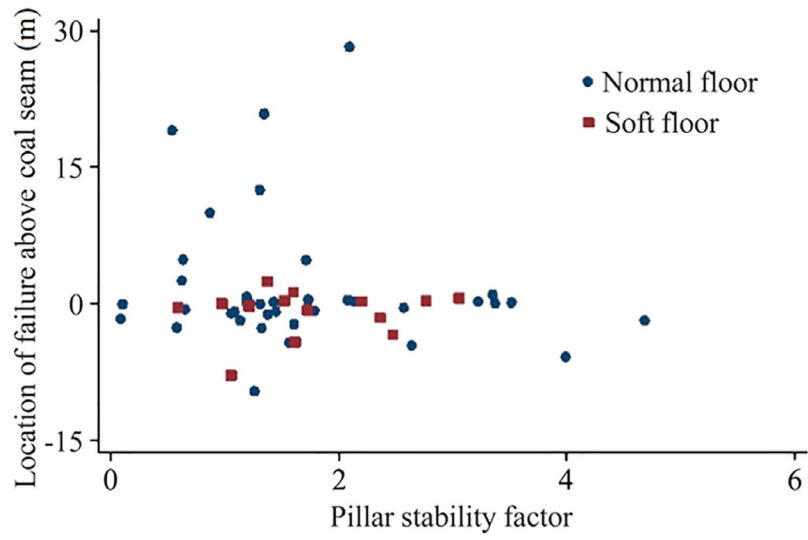


**Fig. 5.** Location of the failures relative to the coal seam and the pillar SFs, for normal and soft floor.

Author Manuscript


Author Manuscript

Author Manuscript


Author Manuscript

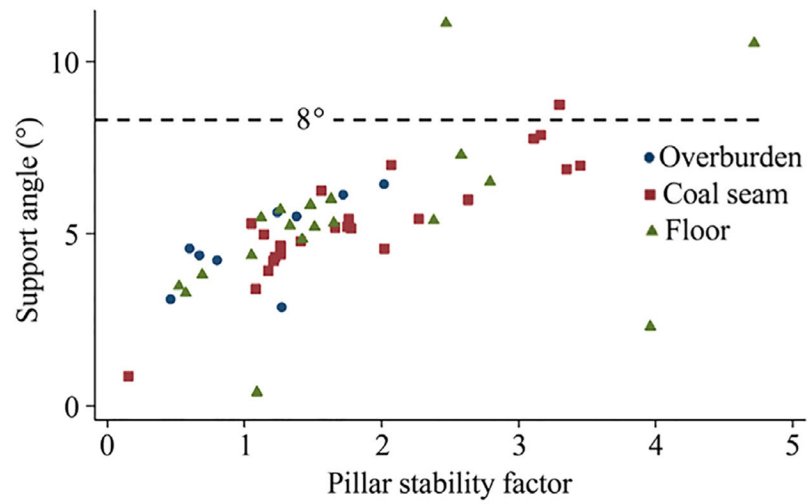


**Fig. 6.** The calculated angle of failure versus the calculated pillar SF, showing the 8° support angle identified by the 1957 study.

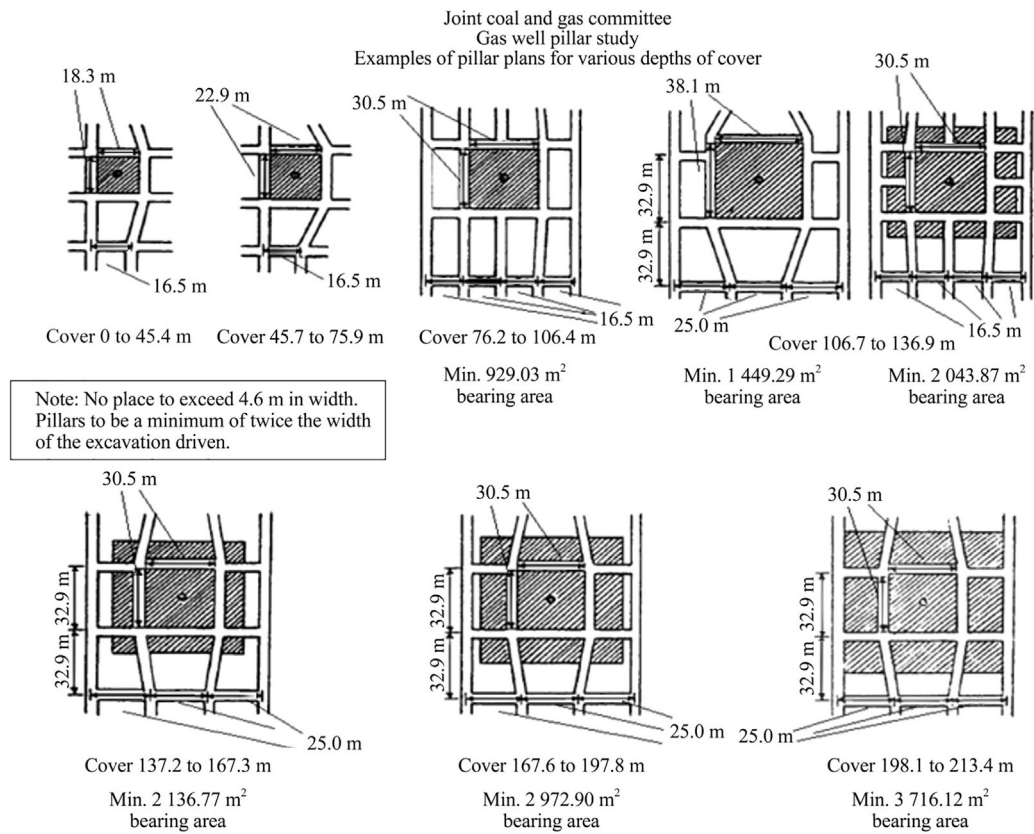


**Fig. 7.**  
Pillar sizing guidelines presented in the 1957 study.

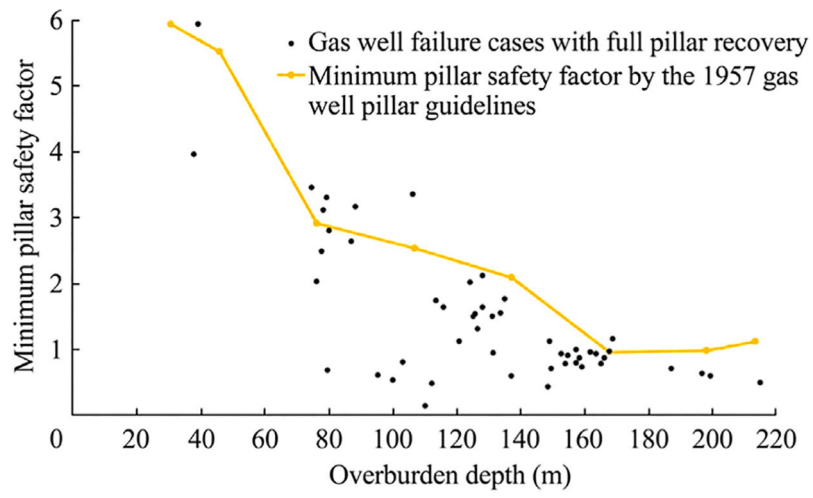

**Fig. 8.** Pillar SF by the 1957 guidelines in comparison with the SF of the pillars in the failure cases.

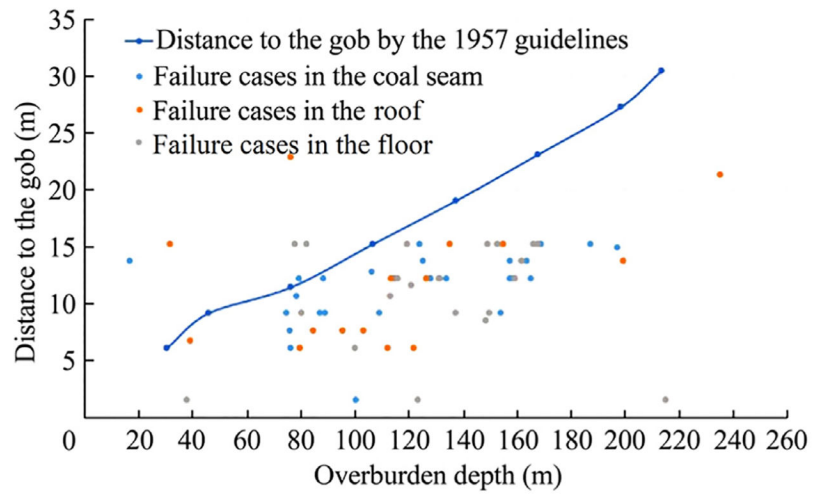


**Fig. 9.** Distance of the gas well to the gob by the 1957 guidelines in comparison with the distance to the gob from the failure cases in the 1957 study.

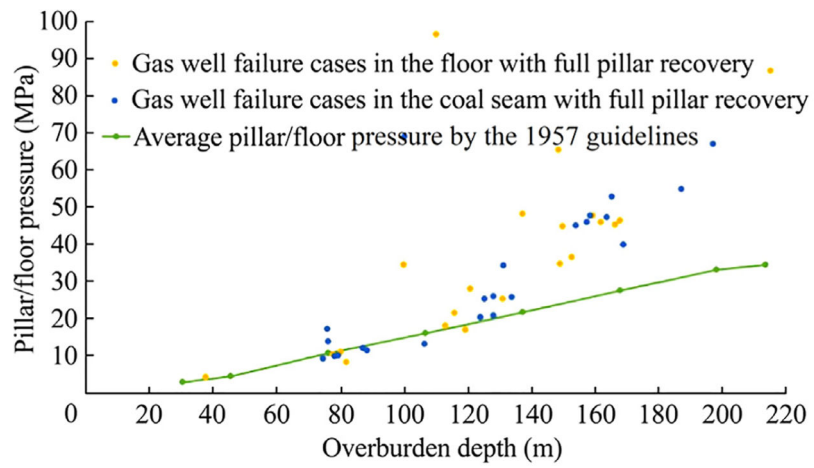


**Fig. 10.**

Calculated average pillar/floor pressure for the pillars by the 1957 guidelines in comparison with the calculated pillar/floor pressure for the failure cases in the coal seam and floor.

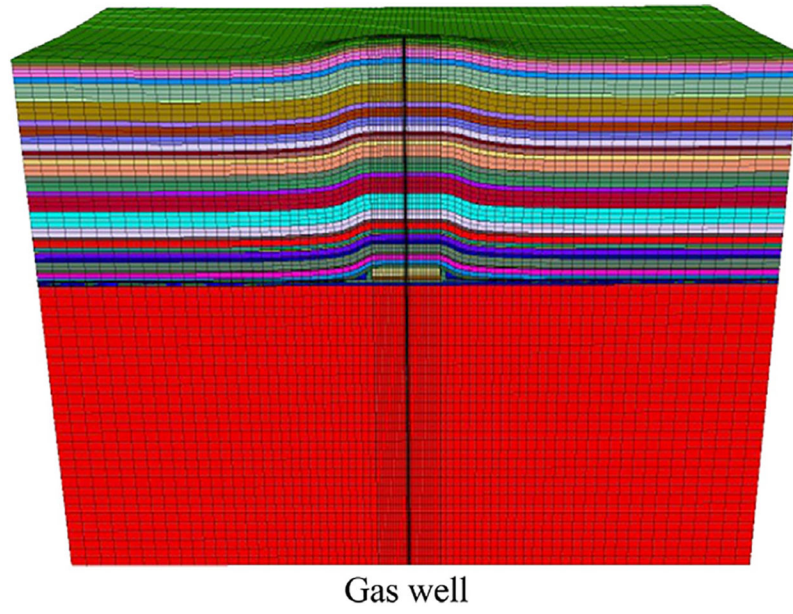


**Fig. 11.**  
FLAC3D model to calculate induced stresses in gas well casings.

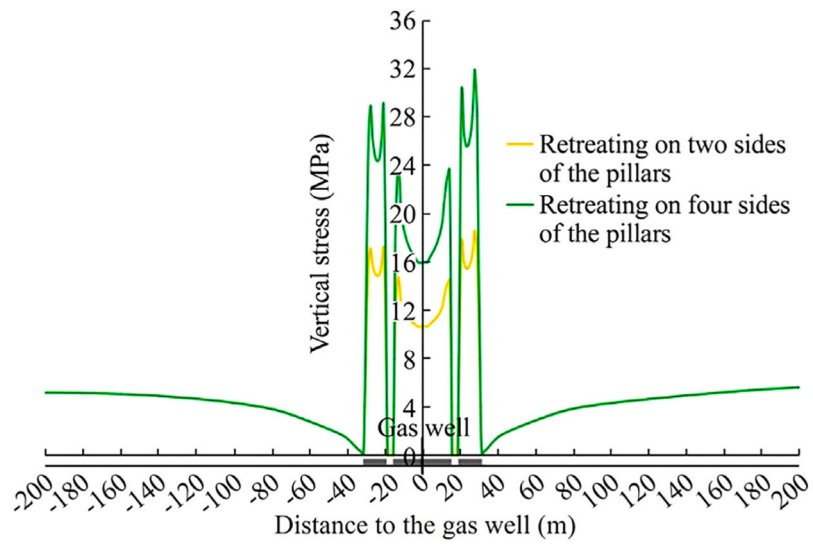


**Fig. 12.** Vertical stress distribution after pillar retreating on two and four sides of the pillar.




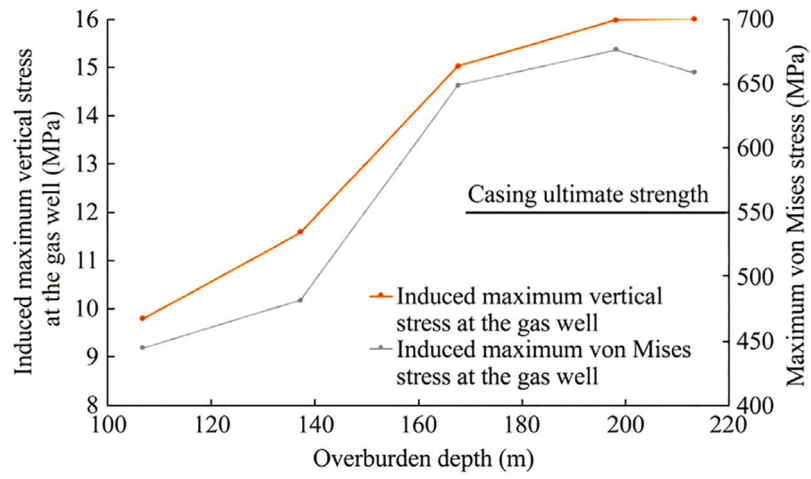


**Fig. 13.** Induced vertical stress in the pillar at the gas well and induced maximum von Mises stress in the gas well casings under different overburden depths.

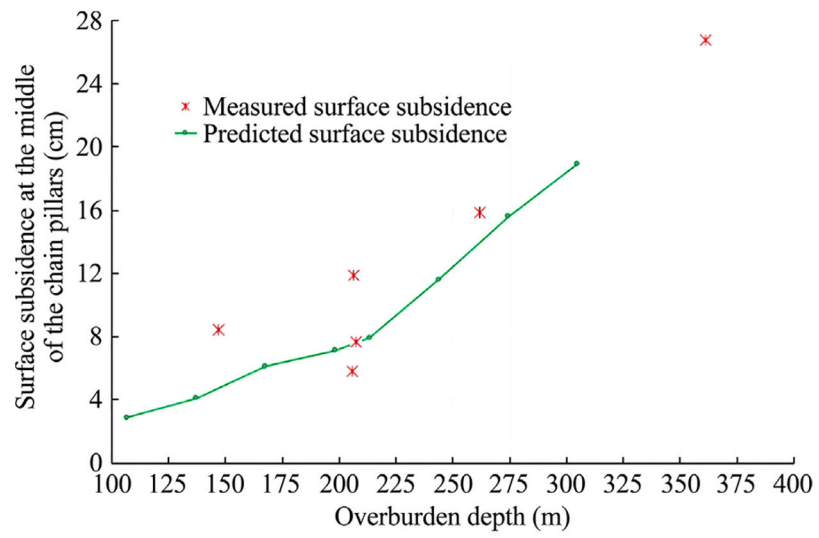


**Fig. 14.** Surface subsidence at the gas well under different overburden depths.

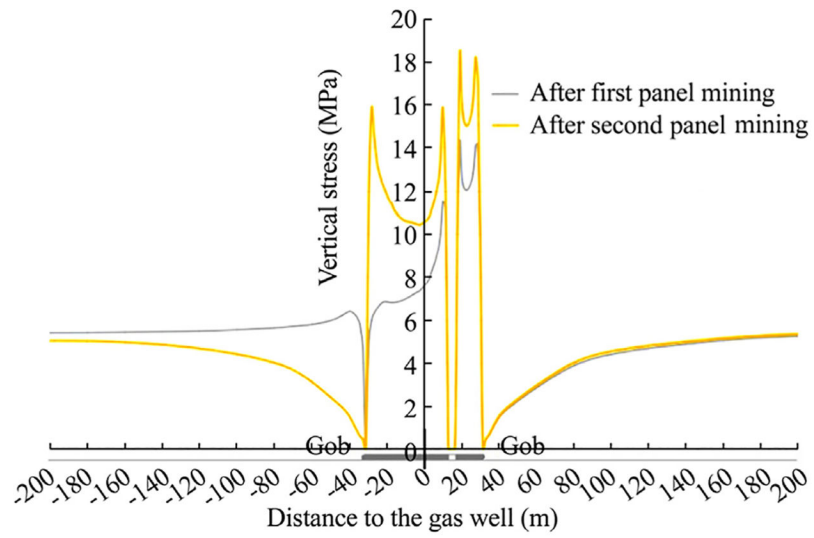

**Fig. 15.** Vertical stress distribution over chain pillars under an overburden depth of 213 m (700 ft).

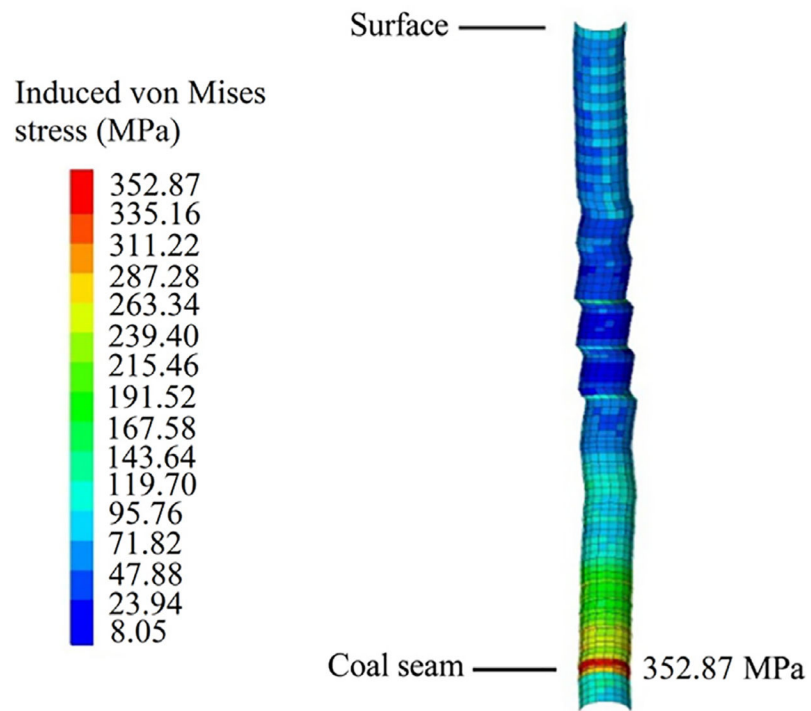


**Fig. 16.** Induced von Mises stress along coal protection casing with an overburden depth of 213 m (700 ft).

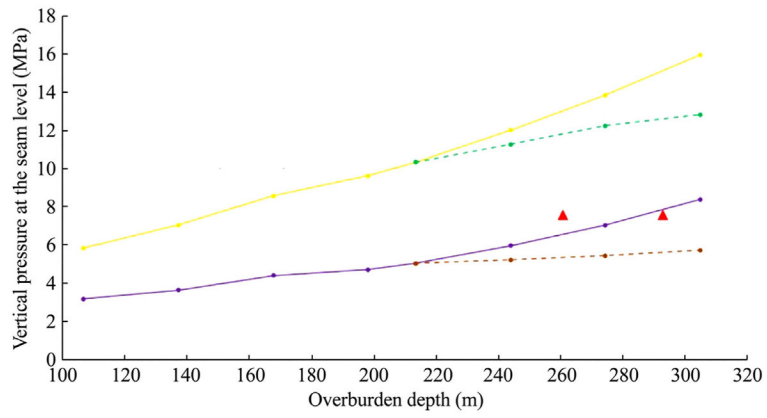

- Induced vertical stress in the coal pillar at the gas well after mining on both sides of the chain pillars
- Pillar/floor pressure at the gas well after mining on both sides of the chain pillars
- - Induced vertical stress in the coal pillar at the gas well with pillar size following 8° support angle
- - Pillar/floor pressure at the gas well with pillar sizes following 8° support angle
- ▲ Cases with large casing deformation

**Fig. 17.** Predicted pillar and floor pressure and induced vertical stress at the gas well under different overburden depths.

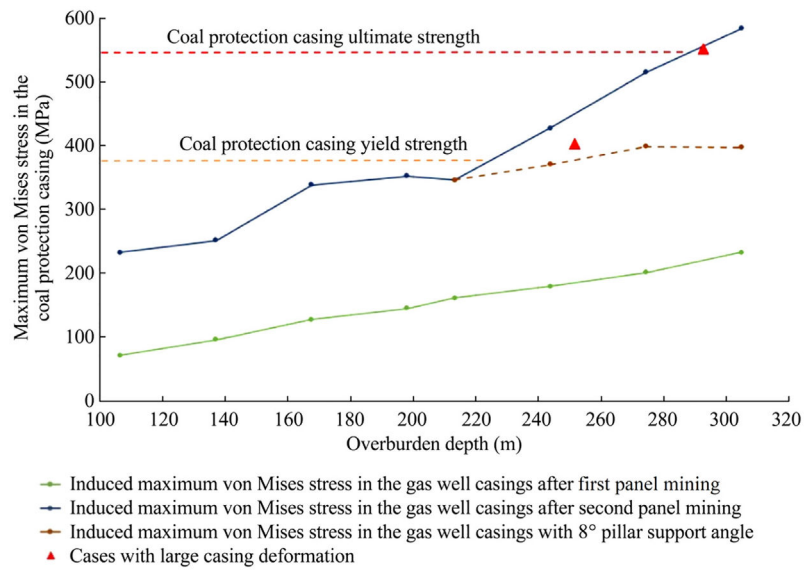

**Fig. 18.** Induced maximum von Mises stress in the coal protection casing under different overburden depths after mining of the first panel and second panel.

**Table 1**

Pairwise correlations obtained for the entire data set. Statistically significant correlations (at about the 90% level or above) are shown in green.

	Depth of cover	Support angle	Pillar stress	Pillar SF	Soft floor	Time of failure	Location of failure
Depth of cover	1.000						
Support angle	-0.363	1.000					
	0.005						
Pillar stress	0.708	-0.689	1.000				
	0.000	0.000					
Pillar SF	-0.479	0.705	-0.706	1.000			
	0.000	0.000	0.000				
Soft floor	0.047	0.195	-0.142	0.0607	1.000		
	0.722	0.143	0.293	0.654			
Time of failure	-0.382	-0.084	-0.226	0.107	0.238	1.000	
	0.009	0.585	0.146	0.493	0.112		
Location of failure	0.089	0.093	0.093	0.156	0.956	0.249	1.000
	0.522	0.512	0.416	0.264	0.000	0.103	

**Table 2**

Mining parameters in the 1957 case history compared with with typical current Pittsburgh seam longwall mining.

<b>Mining parameter</b>	<b>The 1957 cases</b>	<b>Typical current longwall mining</b>
Overburden depth (m)	less than 213	213–396
Mining height (m)	1.82–2.13	1.98–2.59
Entry width (m)	3.65–4.57	4.87
Panel width (m)	91–152	365–457
Development	Drilling and blasting	Continuous bolter miner
Mining direction	On all sides	Parallel to chain pillars
Time for mining by a gas well	Six months to one year	One to two months
Coal extraction ratio	80%–100%	100%
Surface subsidence (m)	less than 0.60–0.91	1.06–1.67
Subsidence period	Could be several years	About one year



**Table 3**

Modeling results for longwall chain pillars following the 1957 guidelines under different overburden depth.

Mining parameter	Modeling result									
Overburden depth (m)	106	137	167	198	213	243	274	304		
Total chain pillar width (rib-to-rib) (m)	35	45	46	54	60	60	60	60		
Chain pillar width (rib-to-rib) (m)	23, 7	30, 9	31, 9	36, 13	42, 13	42, 13	42, 13	42, 13	42, 13	42, 13
Setback distance of the gas well to the gob (m)	12	15	16	24	30	30	30	30		
ACPS pillar SF (isolated loading)*	3.78	3.84	2.86	2.70	2.87	2.33	1.93	1.62		
Predicted pillar/floor vertical stress at the gas well after mining on both sides of the chain pillars (MPa)	5.8	7.0	8.5	9.6	10.3	12.0	13.8	15.9		
Induced vertical stress in the coal pillar at the gas well after mining on both sides of the chain pillars (MPa)	3.1	3.6	4.3	4.6	5.0	5.9	7.0	8.3		
Induced maximum von Mises stress in the production casing after first panel mining (MPa)	71	96	127	144	161	179	200	232		
Induced maximum von Mises stress in the production gas well casing after second panel mining (MPa)	222	2406	324	337	328	412	501	564		
Predicted surface subsidence at the gas well (m)	0.028	0.040	0.060	0.070	0.078	0.115	0.155	0.188		

Note: The pillar SF is calculated by ACPS (Analysis of Coal Pillar Stability software [16]).

**Table 4**

Cases with large casing deformation in longwall chain pillars.

Overburden depth (m)	Total pillar width (rib-to-rib) (m)	Pillar SF	Distance to the gob (m)	Induced vertical stress at the well (MPa)	Induced maximum von Mises stress (MPa)	Failure location
260	51	1.30	18	7.57	410	5.1 m above coal
292	56	1.25	15	7.58	551	4.5 m below coal