



Research article

Nitrogen oxide reduction through absorbent solutions containing nitric acid and hydrogen peroxide in hollow fiber membrane modules

Sutrasno Kartohardjono^{*}, Clarissa Merry, Mohamad Sofwan Rizky, Catharina Candra Pratita

Department of Chemical Engineering, Faculty of Engineering, Universitas Indonesia, Indonesia

ARTICLE INFO

Keywords:

Chemical engineering
 Environmental chemical engineering
 Chemical reaction engineering
 Hydrogen peroxide
 Nitric acid
 NO_x
 Reduction efficiency
 Wet method

ABSTRACT

Emissions of nitrogen oxides such as NO and NO₂, which are commonly known as NO_x, are threats to human existence and cause environmental problems. Mainly, two techniques have been developed to drastically reduce these emissions, which are dry and wet processes. The wet process has several advantages, major identifiable advantages are the adaptability to the flue gas, low operating temperatures and no poisoning and inactivation catalyst. Also, a mixture of hydrogen peroxide and nitric acid are used as absorbents solution for NO_x reduction in the wet process. The advantages of using this mixture include the ability to reduce the negative effect of NO_x and does not contaminate the scrubbing solution. In addition, nitric acid has an economical advantage in the process considering the fact that it is produced in the process. Finally, it can be conducted at ambient temperature. This study furthermore used a mixture of hydrogen peroxide and nitric acid solutions as an absorbent to reduce NO_x in hollow fiber membrane modules. The hydrogen peroxide oxidized HNO₂ to nitric acid, while enhances the oxidation through an autocatalytic reaction. The effects of the feed gas flow rate, hydrogen peroxide concentrations and number of fibers on the NO_x reduction, absorbed NO_x and flux were varied to study. The experimental results showed that the increase in the feed gas flow rate from 100 to 200 mL/min decreased NO_x reduction from about 98 to 94% but increased the absorbed NO_x and flux from about 0.13 to 0.255 mmol/h and 0.85–1.63 mmol/m².h, respectively. The increase in proportion of NO_x in the feed gas effect was dominant than the increase in absorbed NO_x. An increase in hydrogen peroxide concentration from 0.5 to 10 wt.% in the absorbent solutions increased NO_x reduction, absorbed NO_x and flux from about 94 to 98%, 0.257–0.267 mmol/h and 1.09–1.13 mmol/m².h, respectively. Additionally, the H₂O₂ plays an important role in enhancing HNO₂ oxidation to HNO₃. Furthermore, an increase in the number of fibers from 50 to 150 in the membrane module increased NO_x reduction and absorbed NO_x from 86 to 97% and 0.23–0.27 mmol/h. Flux decreased from 2.98 to 1.13 mmol/m².h due to increment in the gas-liquid contact surface area.

1. Introduction

Nitrogen oxides, such as NO and NO₂, commonly known as NO_x are usually emitted from the consumption of fossil fuel in power generation and industrial production, endanger life and pose a threat to the environment [1, 2]. NO_x has been considered one of the major air pollutants, which do not only harm the human body, but also trigger a series of serious environmental problems like global warming, photochemical smog, ozone depletion, and respiratory diseases [3, 4, 5]. NO_x further reacts with OH⁻ radicals in the atmosphere to form nitric acid, thereby producing acid rain [6]. In addition, NO_x causes the eutrophication of lakes, which brings to extinction of aquatic life [7]. Scientists and engineers all over the world have been challenged by this fact, devising ways

of developing a more efficient deNO_x technique, aimed at mitigating the effect of strict NO_x emission [8, 9].

The emissions of NO_x mainly depend on the combustion temperature, time, and air-fuel ratio [10]. Several technological techniques have been developed to reduce NO_x emissions in order to meet regulations and mainly based on two methods: dry and wet processes [11]. The dry process includes selective catalytic reduction (SCR) [12] and NO_x storage and reduction (NSR) [13], which is also known as lean NO_x trap (LNT) [8]. SCR using NH₃ has the reducing reagent over catalysts based on V₂O₅-WO₃/TiO₂ or Cu- and Fe-zeolites [14, 15]. This has been proven highly efficient for NO_x removal, involving flue gas temperatures typically ranging from 300 to 400 °C [16]. The commercial V₂O₅-WO₃/TiO₂ catalyst shows high NO_x removal efficiency (>90%) at 350–400 °C [17].

^{*} Corresponding author.

E-mail address: sutrasno@che.ui.ac.id (S. Kartohardjono).

<https://doi.org/10.1016/j.heliyon.2019.e02987>

Received 29 July 2019; Received in revised form 3 October 2019; Accepted 2 December 2019

2405-8440/© 2019 The Author(s). Published by Elsevier Ltd. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).

However, it is not suitable for medium and small industry boilers due to its high cost, its limitation to low-temperature for SCR application [18, 19], and the introduction of ammonia into the gas stream thereby leading to the formation of ammonium bisulfate and ammonia slip in the atmosphere [20]. The deactivation of SCR catalyst due to the high concentration of fly ash also makes this technology unreliable for prolonged efficient operation [21, 22]. The method, adopted by NSR, is being influenced by sulfur poisoning or thermal reduction of the catalyst being used in the process, which also aids production of side products such as N_2O and NH_3 , identified as strong greenhouse gas and toxic materials.

The wet process offer several advantages over the dry these include the adaptability to the flue gas, the low operating temperature and no catalyst poisoning and inactivation or decrease ability as time goes [23]. To neutralize NO_x or convert the insoluble NO_x species by oxidation to more soluble ones, the wet process uses various absorbents such as aqueous solutions of sodium or calcium hydroxide, hydrogen peroxide, sodium chlorine or potassium permanganate, added to the scrubbing solutions. The use of hydrogen peroxide as the oxidizing agent are considered appropriate due to the fact that it has the capacity to reduce the gaseous pollutants without producing liquid wastes. Then, the product from the oxidation could be recovered and recycled [11].

In this study, hollow fiber membrane modules was utilized for NO_x reduction into absorbent solutions containing hydrogen peroxide and nitric acid as oxidizing and autocatalytic agents, respectively. The hydrogen peroxide is an oxidizing agent, widely used in the chemical industry such as bleach for textiles and pulp, and a treatment for municipal and industrial waste. The use of hydrogen peroxide and nitric acid to scrub NO_x is an attractive choice considering the fact that it could handle a wide rates of NO_x . It does not produce contaminants to the scrubbing solutions and gives the products in commercial quantity from the process, i.e. nitric acid [20]. In addition, the process could be conducted at ambient temperature [24] and provide high NO_x reduction [25].

Gas absorption using membrane modules is a combined process that fully integrates the advantages of membrane separation and absorption processes. In the hollow fiber membrane module, there are two different spaces for each fluid: the shell side and the lumen fiber. The absorbent solutions located in the shell side of the hollow fiber membrane module, has a selective absorption for several types of gas species. Also, the pores in the membrane fiber play a role in distributing feed gas into the shell side of the membrane module containing nitric acid and hydrogen peroxide, thereby enlarging the contact area between the gas and liquid phases where the reaction between the NO_x and absorbent solution takes place. In addition, hollow fiber membrane module offers operational flexibility to scale up and down [26, 27].

The mechanism of NO_x absorption into solutions containing H_2O_2 and HNO_3 has been described in several sources [24, 28, 29]. The gas-phase reactions that occur when NO and NO_2 are mixed in the presence of O_2 and water vapor are as follow:



Furthermore, in the liquid phase there are transport of NO , HNO_2 , NO_2 , N_2O_3 and N_2O_4 compounds through the interface to the bulk liquid, where the last 3 species react with water to form nitrous and nitric acids according to:



The presence of hydrogen peroxide in the liquid phase prevents the decomposition of HNO_2 by oxidation to HNO_3 through the following reaction [24]:



Furthermore, the addition of nitric acid solution enhances the rate of reaction Eq. (8) via an autocatalytic reaction [28].

2. Materials and methods

2.1. Experimental setup

There are two channels in the hollow fiber membrane module in which lumen bundle and shell side of the module for inlet and outlet fluids. For experimental purposes, one channel in both the lumen bundle and shell side of the module was plugged thereby allowing only one channel each in both parts. A certain volume of the absorbent solution, composed of H_2O_2 and HNO_3 , was statically placed in the shell side, while the feed gas containing NO_x flowed through the lumen fiber and penetrated into the fiber through the shell side of the membrane module. This was easily achieved considering the fact that there was a contact between the feed gas and absorbent solution. The feed gas flow rates to the membrane module was controlled with a mass transfer controller. This makes the membrane fibers in the contactor distributes the feed gas before it contacts the liquid in the shell side in order to increase the surface area for the gas-liquid contact. The hollow fiber module details and the operating conditions are summarized in Tables 1 and 2, respectively. Meanwhile, the schematic diagram of experimental set up is presented in Figure 1.

2.2. Materials and analytical methods

Four hollow fiber modules used were supplied by GDP Filter Bandung, in Indonesia. These modules consisted of 32, 50, 100, and 150 fibers, made up of polysulfone; having inner and outer diameters of 0.18 cm and 0.2 cm respectively. H_2O_2 (35 wt.%) and HNO_3 (65 wt.%) were purchased from Merck, Indonesia, while the feed gas containing approximately 560 ppm of NO_x in air was supplied by Energi Indogas Nusantara, Indonesia. During the experiment, the feed gas flow rates were controlled using a CX Series mass flow controller from Shanghai Cixi Instrument. The NO_x concentrations in the inlet and outlet of the membrane modules were measured using combustion gas analyzer Ecom-D. To prepare 1 L 0.5 M HNO_3 , 35 mL of HNO_3 (65 wt.%) was added to 965 mL distilled water in a volumetric flask. This solution was then titrated with sodium hydroxide to determine its concentration. Moreover, 7.5, 15, 30, 150, and 300 ml of H_2O_2 (30 wt.%) were diluted with distilled water up to 1000 mL to prepare 1 L of 0.25, 0.5, 1, 5 and 10 wt.% H_2O_2 , respectively. These solutions were quantitatively analyzed by the permanganometry method through the addition of sulfuric acid and titration with the potassium permanganate. In the module containing 32 fibers, 25 ml of 0.25, 0.5, 1, 5 and 10 wt.% of H_2O_2 and 25 ml of HNO_3 0.5 M were added to the contactor in the shell side. Meanwhile, in the module containing 50, 100 and 150 fibers 75 ml of 0.5, 5 and 10 wt.% of H_2O_2 and 75 ml of HNO_3 0.5 M were added to the contactor in the shell side.

Table 1. Hollow fiber membrane module dimensions.

Hollow fiber membrane module	Sizes
Shell diameter	2.5 and 5 cm
Module length	25 cm
Number of fibers	32, 50, 100, and 150

Table 2. Operating conditions.

Conditions	Values
Feed gas flow rates	100, 150, and 200 cm ³ /min
Feed [NO _x] ppm	560
[HNO ₃] M	0.5 ± 0.02
[H ₂ O ₂] wt. %	0.25, 0.5, 1, 5 and 10 ± 2%
Temperature	27 ± 3 °C

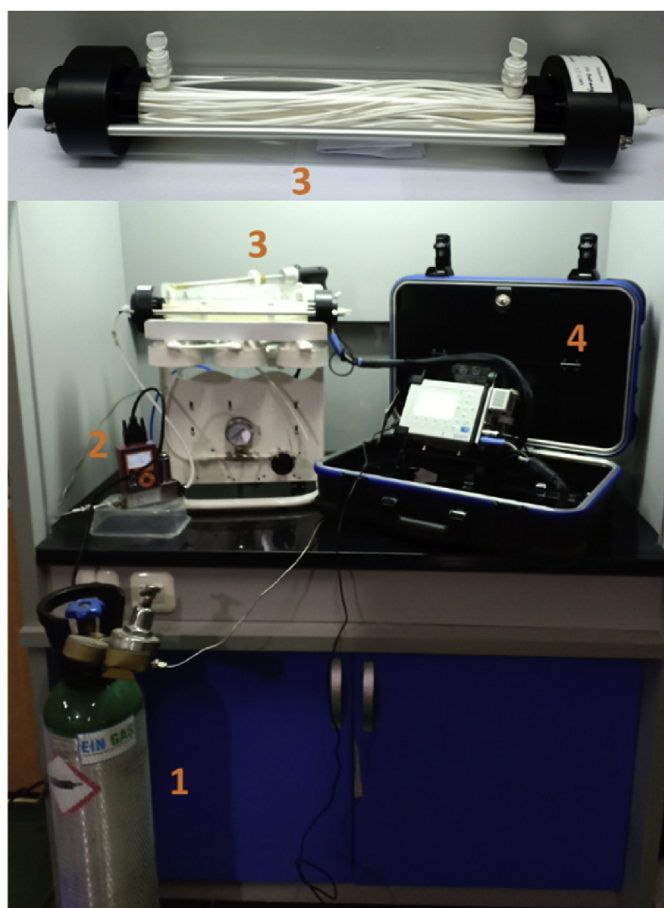


Figure 1. Schematic diagram of experimental set up: 1. Feed gas containing NO_x tank; 2. Mass flow controller; 3. Hollow fiber membrane module; 4. Gas analyzer.

2.3. Experimental parameters

The amount of Absorbed NO_x by the absorbent solution, NO_{xAbs} , flux, J and NO_x reduction, R , during the experiments were calculated as follows [25, 30]:

$$NO_{xAbs} = (NO_{x_{in}} - NO_{x_{out}})Q_G \frac{P}{RT} \quad (9)$$

$$J = \frac{NO_{xAbs}}{A_m} \quad (10)$$

$$R = \frac{NO_{x_{in}} - NO_{x_{out}}}{NO_{x_{in}}} \quad (11)$$

where $NO_{x_{in}}$ and $NO_{x_{out}}$ are absorbed NO_x concentrations in the feed gas entering in and leaving the membrane contactor, respectively. In addition, Q_G , P , T , R , and A_m are the feed gas flow rate, atmospheric pressure,

temperature, ideal gas constant, and membrane fiber surface area, respectively.

3. Results and discussion

3.1. Influence of feed gas flow rates

The mechanism of NO_x absorption in the absorbent solution followed three steps of transfer [25, 31]: The transfer of NO_x from the bulk gas to the inside of the lumen fiber in the gas phase, transfer of NO_x through the pores of the membrane fibers to the outside of the fiber in the gas phase; and transfer of NO_x to the bulk absorbent solutions. The reactions occur between NO_x in the gas stream and the absorbent solution as in Eqs. (5), (6), (7), and (8) when the gas stream containing NO_x is in contact with the absorbent solution in the gas-liquid interface and in the bulk of the absorbent solutions at the shell side of the membrane module.

Figure 2 shows the effects of feed gas flow rate on NO_x reduction, R , and absorbed NO_x, NO_{xAbs} , in a hollow fiber module containing 32 fibers. As shown in Figure 2, the absorbed NO_x increased with increasing gas flow rate, but the NO_x reduction only slightly decreased. Increasing the feed gas flow rate will increase the amount of NO_x in the feed gas, which is distributed in the lumen fibers, thereby increasing the number of moles of NO_x gas, which spreads out from the lumen fibers to the pores of the membrane fibers toward the shell side containing the absorbent solutions where the reactions (Eqs. (5), (6), (7), and (8)) occurred. Therefore, increasing the feed gas flow rate increased absorbed NO_x, which in turn enhanced the NO_x reduction. Although the increase in the feed gas flow rate increased the amount of NO_x in the feed gas, it was disadvantageous for the NO_x reduction, as expressed in Eq. (11). The slightly decrease of NO_x reduction as presented in Figure 2 indicated that the effect of the amount of NO_x in the feed gas is almost similar to the effect of absorbed NO_x. The NO_x reduction slightly decreased from 0.940 to 0.935 when the feed gas flow rate increased from 100 to 200 mL/min, indicating that the increase in feed gas flow rate have no significant impact on the NO_x reduction. Meanwhile, Wang and Yu [25] reported in their study, NO reduction efficiency decreased from approximately 0.91 to 0.29 when the feed gas flow rate increased from 50 to 250 mL/min by using NO concentration in the feed gas of ~184.8 ppm, absorbent solutions containing a mixture of 0.2 wt.% H₂O₂ and 5 wt.% NaCl, and polypropylene-based hollow fiber membrane module. This result confirms that the increase in the feed gas flow rate will increase absorbed NO_x, but also increase the NO_x concentration of the gas leaving the membrane module. The effect of feed gas flow rate on NO_x reduction in

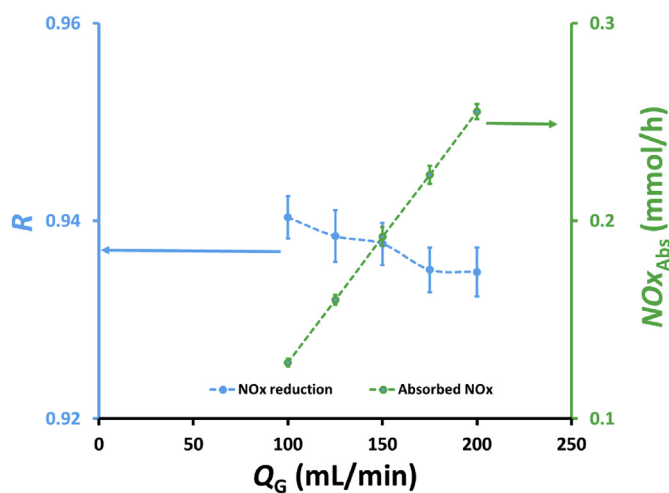


Figure 2. Effects of feed gas flow rate, Q_G , on NO_x reduction, R , and amount of absorbed NO_x by the absorbent solution, NO_{xAbs} , containing a mixture of 25 mL of 0.5 wt.% H₂O₂ and 25 mL 0.5 M HNO₃ in a hollow fiber membrane module with 32 fibers.

this study is somewhat different from what reported by Wang and Yu [25]. In this study there was a direct contact between the absorbent solution in the shell side of membrane module and the feed gas that flew through the lumen fiber and diffused to the membrane pores to the shell side of the contactor, so that there was no significant effect on the NOx reduction with increasing feed gas flow rate. Meanwhile, the experiments conducted by Wang and Yu the gas-liquid contact only occurred in the pores of the membrane fibers so that there was a drastic decrease in NOx reduction with increasing feed gas flow rate.

The effects of the feed gas flow rate on the flux is shown in Figure 3. The flux increased with increasing feed gas flow rate. The increase in the feed gas flow rate not only increasing gas flow rate to the membrane module, Q_G , but also increasing $NO_{x, Abs}$, as shown in Figure 2; thus, the same membrane surface area provides a higher flux, as shown in Figure 3. As can be seen from Figure 3, the flux increased from 2.6 to 5.1 mmol/m².h, when the feed gas flow rate increased from 100 to 200 mL/min. Wang and Yu [25] reported that the NO absorption flux increased from ~0.025 to 0.040 mmol/m².h when the feed gas flow rate increased from 50 to 200 mL/min by using NO concentrations in the feed gas of ~184.8 ppm, absorbent solutions containing a mixture of 0.2 wt.% H₂O₂ and 5 wt.% NaCl, and polypropylene-based hollow fiber membrane module. The absorption rate in this study was much higher than that obtained by Wang and Yu [25] because in this study there was a direct contact between feed gas containing NOx and the absorbent solution in the shell side of the membrane module, whilst the gas-liquid contact only occurred in the pores of membrane fiber in Wang and Yu experiments [25].

To evaluate the performance of NOx absorption with time, an experiment was conducted using a hollow fiber membrane module with 100 fibers and an absorbent solution containing a mixture of 75 mL of 0.5 wt.% H₂O₂ and 75 mL of 0.5 M HNO₃. Moreover, the feed gas flow rates to the membrane module were 100, 150, and 200 mL/min Figure 4 presents the profile of NOx reduction with time at feed gas flow rates of 100, 150, and 200 mL/min. As shown in the figure, NOx reduction at the feed gas flow rate of 200 mL/min decreased more than that at other two feed gas flow rates. This occurred because absorbed NOx at the gas flow rate of 200 mL/min is also the highest, as shown in Figure 5; thus, the number of moles of the absorbent solution remaining in the shell side of the membrane module also decreased led to the increase NOx concentration in the gas exiting the membrane module, which caused a faster decrease in NOx reduction. In addition, the increasing feed gas flow rate indicated that the gas residence time in the liquid phase in the shell side of the membrane module was increasing. This increase in residence time increased the NOx concentration in the outlet gas of the membrane module, which, according to Eq. (11), caused a decrease in the NOx

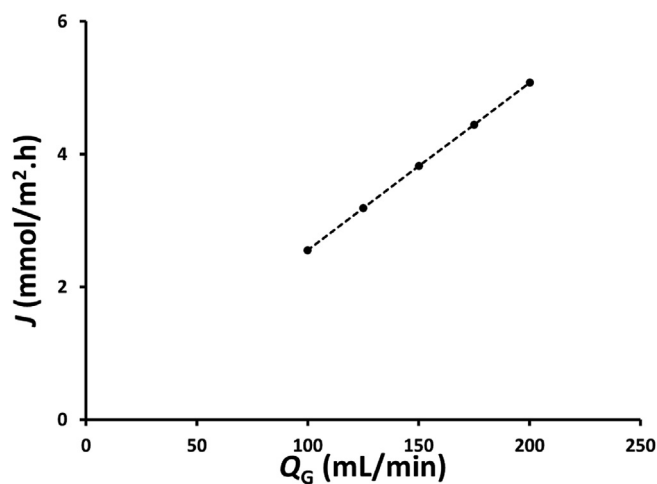


Figure 3. Effects of feed gas flow rate, Q_G , on the flux, J , in a hollow fiber membrane module with 32 fibers containing a mixture of 25 mL of 0.5 wt.% H₂O₂ and 25 mL 0.5 M HNO₃ as an absorbent solution.

reduction. During the 1 h experiment, NOx reduction decreased from 0.99 to 0.96, 0.99 to 0.90, and 0.98 to 0.85, i.e., a decrease of approximately 3.0%, 9.1% and 13.3% was achieved for the feed gas flow rates of 100, 150, and 200 mL/min, respectively. Figure 4 (inset) also shows that NOx reduction for an average of 1 h decreases from 0.98 to 0.94 or decreases by approximately 4.1% when the feed gas flow rate increases from 100 to 200 mL/min.

The profiles of absorbed NOx and flux with time at the feed gas flow rates of 100, 150, and 200 mL/min using a hollow fiber membrane module with 100 fibers and an absorbent solution containing a mixture of 75 mL of 0.5 wt.% H₂O₂ and 75 mL of 0.5 M HNO₃ are shown in Figure 5. As shown in Figure 5, absorbed NOx and flux increased with increasing feed gas flow rate due to more NOx in the feed gas that can be absorbed. During the 1hour experiment, absorbed NOx decreased from 0.135 to 0.129 mmol/h, 0.203 to 0.186 mmol/h, and 0.266 to 0.227 mmol/h, i.e., by 4.4%, 8.4%, and 15.6% for the feed gas flow rates of 100, 150, and 200 mL/min, respectively. Therefore, a higher feed gas flow rate caused a higher decrease in NOx absorbed due to the higher amounts of H₂O₂ and HNO₃ consumed during the absorption process, thereby reducing the concentration of the remaining absorbent solution in the shell side of the membrane contactor. Thomas and Vanderschuren [24] reported that NOx reduction during 1 h experiment using water as absorbent decrease from about 60 to about 40%, or a decrease of 33%. Meanwhile, Wang and Yu [25] conducted a longer experiments, which was until 210 min, and found that NOx reduction gradually decreased from about 60 to 45.7%, or a decrease of 23.8%, at feed gas flow rate of 200 mL/min using a mixture of 0.4 wt.% H₂O₂ and 30 wt.% NaCl as absorbent solution volume of 2 L, absorbent circulation rate of 40 mL/min and temperature of 60 °C.

The profile of flux is identical to that of absorbed NOx as the same membrane surface area was used in the experiments. The NOx absorbed decreased from about 0.135 to 0.131 mmol/h, 0.203 to 0.184 mmol/h and 0.269 to 0.232 mmol/h, or decreases of 3.5, 9.3 and 14.0% when the feed gas flow rates were 100, 150 and 200 mL/min, respectively. Furthermore, the NOx flux, after 1 h experiments, decreased from about 0.86 to 0.83 mmol/m².h, 1.29 to 1.17 mmol/m².h and 1.71 to 1.47 mmol/m².h, or decreases of 3.5, 9.3 and 14.0% when the feed gas flow rates were 100, 150 and 200 mL/min, respectively. Meanwhile, Wang and Yu [25] reported that the NOx flux decreases from 0.065 to 0.0496 mmol/m².h after 210 min of experiment, or a decrease of 23.7%, at feed gas flow rate of 200 mL/min using a mixture of 0.4 wt.% H₂O₂ and 30 wt.% NaCl as absorbent solution volume of 2 L, absorbent circulation rate of 40 mL/min and temperature of 60 °C. The averages of absorbed NOx and flux during 1 h experiment, as shown in inside Figure 5, increased from 0.133 to 0.255 mmol/h and from 0.85 to 1.63 mmol/m².h or increased about 92% when the feed gas flow rate increased from 100 to 200 mL/min, respectively.

3.2. Influence of H₂O₂ concentration

The effects of H₂O₂ concentration in the absorbent solutions on NOx reduction, R , and absorbed NOx, $NO_{x, Abs}$, are shown in Figure 6. It can be seen that absorbed NOx and NOx reduction increased with increasing H₂O₂ concentration in the absorbent solutions because H₂O₂ plays an important role in enhancing HNO₂ oxidation to HNO₃, as expressed in Eq. (8). NOx reduction and absorbed NOx slightly increased when H₂O₂ concentration in absorbent solution was increased from 0.25 to 2.5 wt.%. However, when H₂O₂ concentration was increased from 2.5 to 5 wt.%, NOx reduction and absorbed NOx were relatively constant, indicating that at the 2.5 wt.% H₂O₂ the maximum NOx absorption was almost achieved. NOx reduction increased from 0.93 to 0.95 when H₂O₂ concentration increased from 0.25 to 2.5 wt.%. In addition, a trend similar to that of efficiency occurred in the flux, wherein their values slightly increased when H₂O₂ concentration increased from 0.25 to 2.5 wt.% and became relatively constant when H₂O₂ concentration increased from 2.5 to 5 wt.%, as demonstrated in Figure 7. This fact revealed that an increase

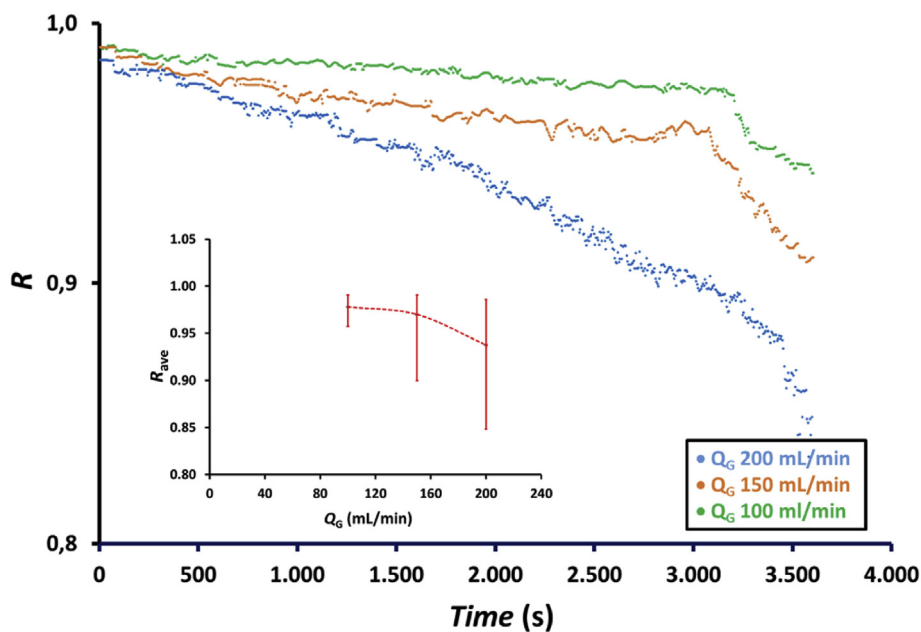


Figure 4. Profile of NOx reduction, R , with time at feed gas flow rates, Q_G , of 100, 150, and 200 mL/min and the effect of feed gas flow rates on the average NOx reduction, R_{ave} (inset figure) using a membrane module with 100 fibers and an absorbent solution containing a mixture of 75 mL of 0.5 wt.% H_2O_2 and 75 mL of 0.5 M HNO_3 .

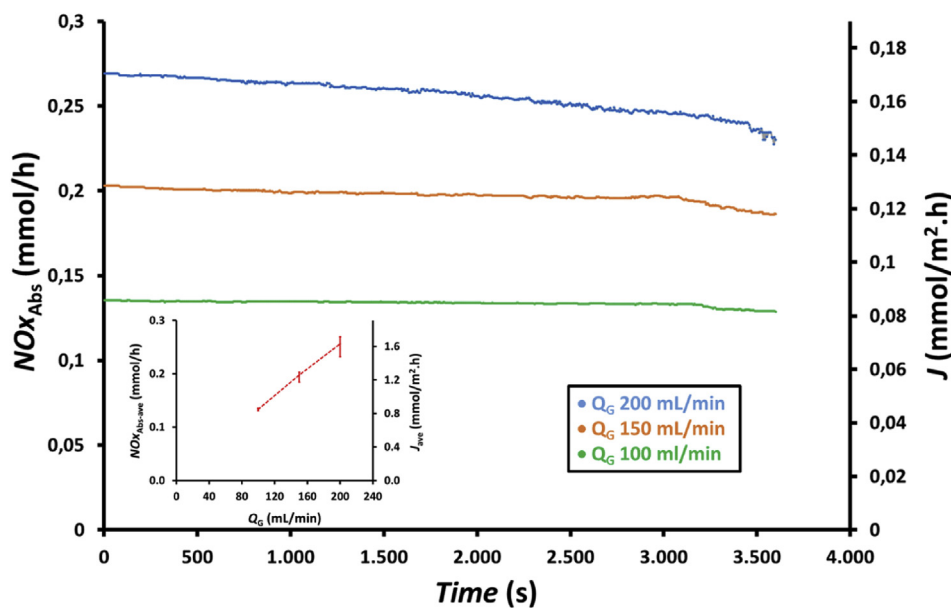


Figure 5. Profiles of the amount of absorbed NOx, NOx_{Abs} , and flux, J , with time at feed gas flow rates, Q_G , of 100, 150, and 200 mL/min and the effect of feed gas flow rates on the averages amount of absorbed NOx, $NOx_{Abs-ave}$, and flux, J_{ave} (inset figure) using hollow fiber membrane module with 100 fibers and an absorbent solution containing a mixture of 75 mL 0.5 wt.% H_2O_2 and 75 mL 0.5 M HNO_3 .

in H_2O_2 concentration from 2.5 to 5 wt.% does not have a significant impact on increasing absorbed NOx as the efficiency of NOx reduction at this range of H_2O_2 concentration is already high, as presented in Figure 6. Thus, only a small amount of NOx remaining in the gas phase can be absorbed by the absorbent solution. Wang and Yu [25] reported that there were an increase in NO reduction efficiency from 0.372 to 0.478 when the H_2O_2 concentration increased from 0 to 0.4 wt.% at the feed gas flow rate of 200 mL/min containing NO of 184.8 ppm and the absorbent solution of H_2O_2 0 to 0.4 wt.% and NaCl 5 wt.%. In addition, Hao et al. reported that there was an increase in NO reduction from 0.19 to 0.64 and from 0.21 to 0.82 without and with UV light in a hybrid catalytic

reactor, respectively, when H_2O_2 concentration increased from 1 to 30 wt.% [32]. In addition, Hao et al. also reported that when H_2O_2 solution was increased from 50 to 150 $\mu\text{L}/\text{min}$, there was an increase in NO reduction efficiency from 0.416 to 0.625 and from 0.55 to 0.956 without and with UV light, respectively.

The profile of NOx reduction with time at H_2O_2 concentrations of 0.25, 2.5, and 5 wt.% is presented in Figure 8. As shown in Figure 8, the efficiency of NOx reduction, R , increased with the increase in the H_2O_2 concentration in the absorbent solution because H_2O_2 enhances the oxidation of HNO_2 to HNO_3 , as expressed in Eq. (4). Figure 8 shows the difference in NOx reduction increment when H_2O_2 concentration was

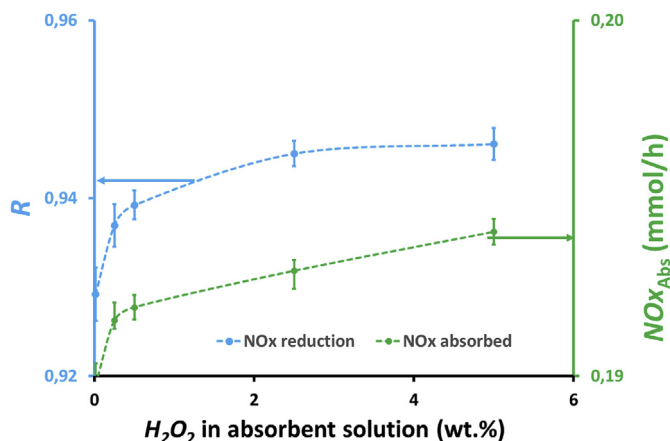


Figure 6. Effect of H₂O₂ concentration on NOx reduction, R , and the amount of absorbed NOx, NOx_{Abs} , by the absorbent solution containing 25 mL of H₂O₂ and 25 mL of 0.5 M HNO₃ in a membrane module with 32 fibers and at a feed gas flow rate of 150 mL/min.

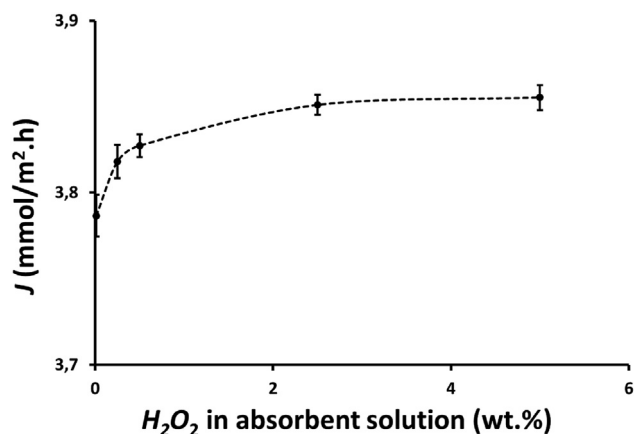


Figure 7. Effect of H₂O₂ concentration on the flux, J , by the absorbent solution containing 25 mL of H₂O₂ and 25 mL of 0.5 M HNO₃ in a membrane module with 32 fibers and at a feed gas flow rate of 150 mL/min.

increased from 0.25 to 2.5 wt.% and from 2.5 to 5 wt.%. There was an increase in NOx reduction when the H₂O₂ concentration in the absorbent solution was increased from 0.25 to 2.5 wt.%, whereas NOx reduction only slightly increased when H₂O₂ concentration increased from 2.5 to 5 wt.%. Figure 6 also shows that at lower H₂O₂ concentrations, the decrease in efficiency is more significant because of low amount of H₂O₂ remaining in the absorbent solution with time, which oxidizes HNO₂ to HNO₃. During 1 h experiments, NOx reduction decreased from 0.98 to 0.90, 0.99 to 0.95, and 0.99 to 0.94, i.e., decreased by approximately 8.2%, 5.1%, and 4.0% for H₂O₂ concentrations of 0.25, 2.5 and 5 wt.%, respectively. Based on the average NOx reduction, R_{ave} , as shown in the inset of Figure 8, there was an increase from 0.94 to 0.98 or increased by approximately 4.3% when H₂O₂ concentration in absorbent solution increased from 0.25 to 5 wt.%.

The effects of H₂O₂ concentration on the absorbed NOx, NOx_{Abs} , and the flux, J , with time are presented in Figure 9. Absorbed NOx and flux showed a similar trend because the same membrane module was applied for the experiments. As shown in Figure 9, the absorbed NOx and the flux increased with increasing H₂O₂ concentration in the absorbent solution due to the enhance oxidation of HNO₂ to HNO₃, as expressed in Eq. (4). Similar to NOx reduction, there was a difference in absorbed NOx increment when H₂O₂ concentration was increased from 0.25 to 2.5 wt.% and from 2.5 to 5 wt.%. There was also a more significant decrease in NOx absorption at lower H₂O₂ concentrations. The absorbed NOx increased

when H₂O₂ concentration increased from 0.25 to 2.5 wt.%, whereas absorbed NOx only slightly increased when H₂O₂ concentration increased from 2.5 to 5 wt.%. During 1 h experiments, the absorbed NOx decreased from 0.268 to 0.245, 0.270 to 0.257, and 0.271 to 0.259, i.e., decreased by 8.5%, 4.9%, and 4.6% for H₂O₂ concentrations of 0.25, 2.5 and 5 wt.%, respectively. The average absorbed NOx and flux in the 1 hour experiment are shown in the inset of Figure 9. The average absorbed NOx and flux increased from 0.258 to 0.267 mmol/h and from 1.09 to 1.13 mmol/m².h, respectively, when H₂O₂ concentration was increased from 0.25 to 5 wt.%. There was an increase by approximately 2.8% in absorbed NOx and flux when H₂O₂ concentration increased from 0.25 to 2.5 wt.%, whereas absorbed NOx and flux only increased by approximately 0.7% when H₂O₂ concentration increased from 2.5 to 5 wt.%. This result revealed that an increase in H₂O₂ concentration from 2.5 to 5 wt.% does not have a significant impact on absorbed NOx and flux as the efficiency of NOx reduction at this concentration range is already high, as presented in Figure 8. Therefore, only a small amount of NOx remaining in the gas phase can be absorbed by the absorbent solution.

3.3. Influence of fiber number in the hollow fiber membrane module

The effect of fiber number in the membrane modules on NOx reduction at a feed gas flow rate of 200 mL/min using an absorbent solution containing a mixture of 75 mL of H₂O₂ 0.5 wt.% and 75 mL of 0.5 M HNO₃ is presented in Figure 10. The NOx reduction increased with increasing number of fibers in the membrane module. At the same feed gas flow rate, the amount of gas flowing over a single fiber in the membrane module decreases with increasing number of fibers in the membrane module, which is unfavorable for NOx absorption as shown in Figure 2. However, the gas released by a single membrane has a longer residence time compared to the gas released by a single fiber in the module membrane that have fewer fibers; thus, increasing fiber numbers enhances the NOx absorption process. Longer the gas residence time and larger the surface area for gas-liquid contact, better was the gas-liquid contact in the shell side of the membrane module, which is favorable for the NOx absorption. As NOx reduction increased with increasing the number of fibers in the membrane module, it reveals that the effects of residence time and surface area for gas-liquid contact were more dominant than that of the feed gas flow rate in a single fiber. The average NOx reduction, as presented in the inset of Figure 10, increased from 0.86 to 0.97, i.e., increased by approximately 12.8% when the number of fibers in the membrane modules increased from 50 to 150, respectively. The enhanced NOx reduction results have also been reported by Yang et al. [33] and Cui et al. [34]. Yang et al. reported that NOx removal can achieve 80% efficiency when 2 M H₂O₂ was used as the absorbent solution at a flow rate of 0.007 mL/min in a catalytic reactor using alkali-magnetically modified fly ash catalyst, reaction temperature of 137 °C, feed gas flow rate of 300 mL/min, and NOx concentration of 350 ppm [33]. Moreover, Cui et al. reported that 90% NOx removal efficiency was achieved at 140 °C, H₂O₂ flow rate of 0.07 mg/min, and 250 mL/min gas stream containing 500 ppm NO in a fix bed reactor using a catalyst derived from alkali-acid modification [34].

The effect of fiber number in the membrane module on absorbed NOx, NOx_{Abs} , at a feed gas flow rate of 200 mL/min using an absorbent solution containing a mixture of 75 mL of 0.5 wt.% H₂O₂ and 75 mL of 0.5 M HNO₃ is presented in Figure 11. Similar to NOx reduction, absorbed NOx increased with increasing number of fibers in the membrane module because of the increased residence time and large surface area for gas-liquid contact. The average absorbed NOx as shown in the inset of Figure 11, increased from 0.23 to 0.27 mmol/h, i.e., increased by 17.4%, when the number of fibers in the membrane module increased from 50 to 150.

Because the number of fibers in the membrane module is different, the flux shows a trend different from that of NOx_{Abs} . As shown in Figure 12, the flux decreased with the increase in the number of fibers in the membrane module. Increasing the number of fibers in the membrane

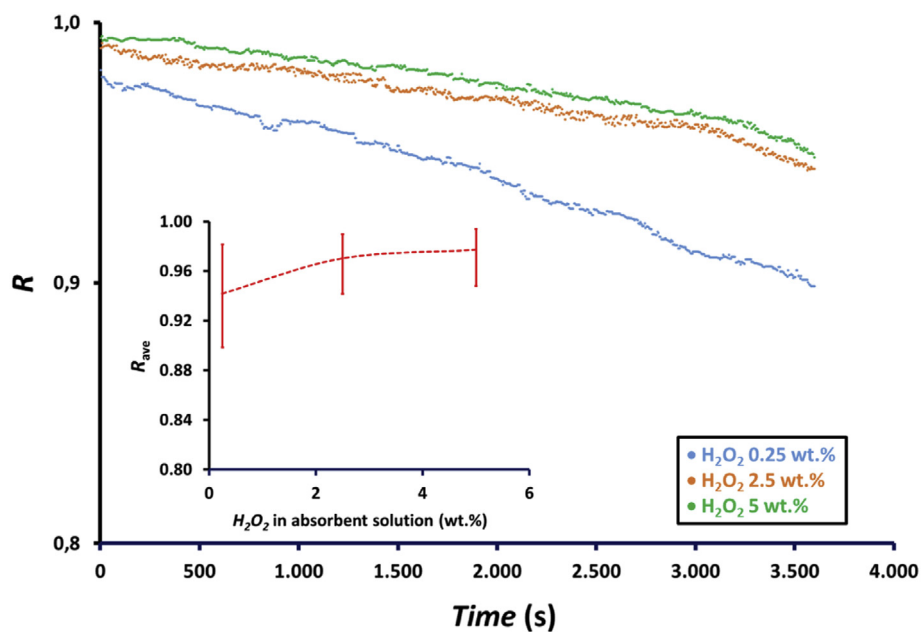


Figure 8. Profile of NOx reduction, R , with time and the effect of hydrogen peroxide concentrations on the average NOx reduction, R_{ave} (inset figure) at feed gas flow rate, Q_G , of 200 mL/min using a membrane module with 100 fibers and an absorbent solution containing a mixture of 75 mL of 0.5, 5, and 10 wt.% H_2O_2 and 75 mL of 0.5 M HNO_3 .

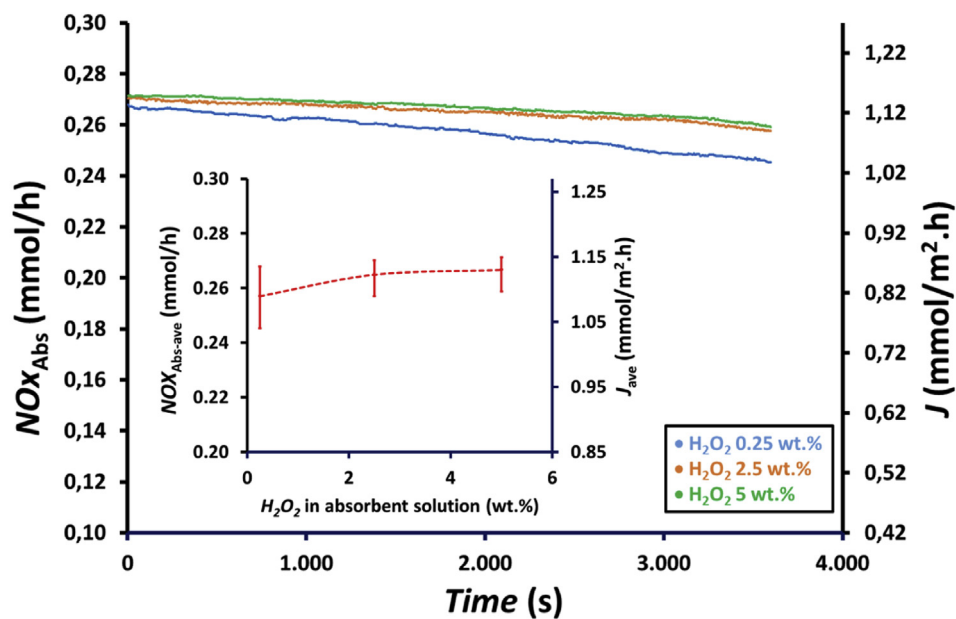


Figure 9. Profile of absorbed NOx, NOx_{Abs} , and flux, J , with time and the effect of hydrogen peroxide concentration on the average amount of absorbed NOx, $\text{NOx}_{\text{Abs-ave}}$ (inset figure) at feed gas flow rate, Q_G , of 200 mL/min using a membrane module with 100 fibers and an absorbent solution containing a mixture of 75 mL of H_2O_2 0.5, 5 and 10 wt.% H_2O_2 and 75 mL of 0.5 M HNO_3 .

module increased absorbed NOx, as shown in Figure 11; therefore, it can increase flux, as expressed in Eq. (11). However, increasing the number of fibers also increased the surface area for the gas–liquid contact; thus, according to Eq. (6), this increase reduced the flux. The decrease in flux due to increasing the number of fibers in the membrane module indicated that the effect of surface area for the gas–liquid contact is more dominant than the effect of absorbed NOx. The average flux during the 1hour experiment is shown in the inset of Figure 12. As can be seen, the average flux decreased from 2.98 to 1.13 mmol/m².h, i.e., decreased by approximately 62%, when the number of fibers in the membrane module was increased from 50 to 150.

4. Conclusion

In conclusion, based on the major findings of this study, it can be elicited that the hollow fiber membrane module can be used to reduce NOx. This is realized from the gas stream where the fibers serve to distribute the feed gas prior to having a contact with the absorbent solution in the shell side side of the membrane module. This results in an increase in the surface area for gas-liquid contact. This increment is very beneficial for the reaction between NOx in the gas stream and the absorbent solution containing hydrogen peroxide and nitric acid in the shell side of membrane module. This study observed the effects of feed

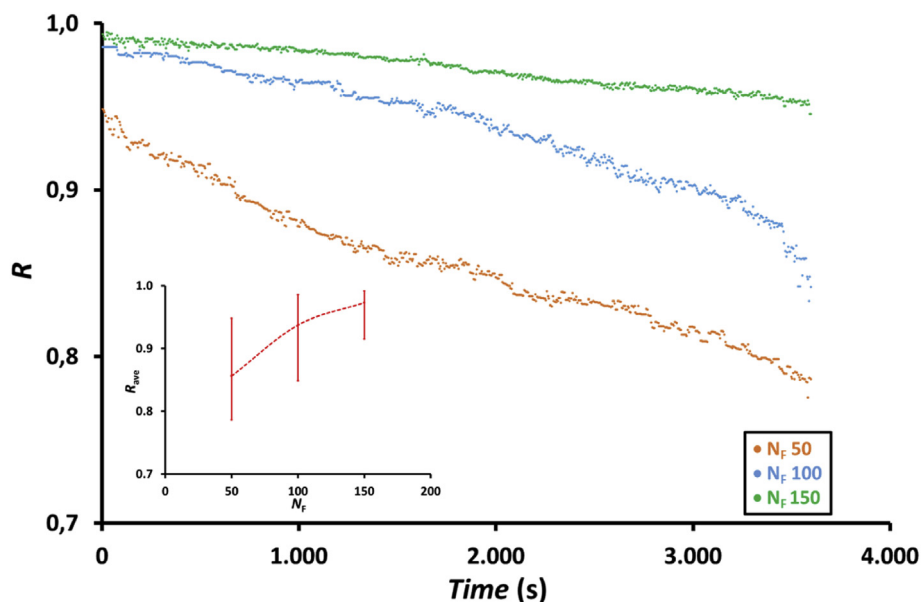


Figure 10. Profile of NOx reduction, R , with time and the effect of the number of fibers in the membrane module, N_F , on the average NOx reduction, R_{ave} (inset figure) at feed gas flow rate, Q_G , of 200 mL/min using a membrane module with 50, 100 and 150 fibers and absorbent solution containing a mixture of 75 mL of 0.5 wt.% H_2O_2 and 75 mL of 0.5 M HNO_3 .

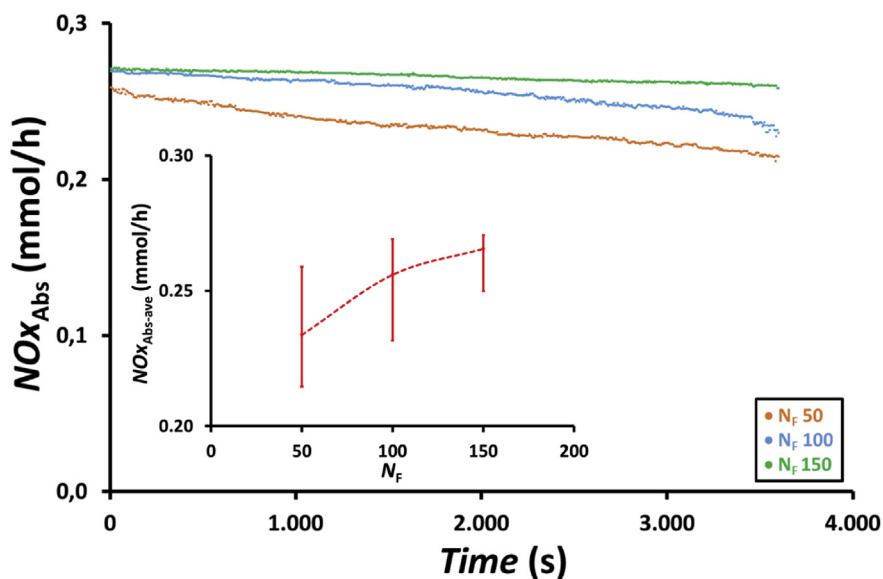


Figure 11. Profile of absorbed NOx, NOx_{Abs} , with time and the effect of the number of fibers in the membrane module, N_F , on the average amount of absorbed NOx, $NOx_{Abs-ave}$ (inset figure) at feed gas flow rate, Q_G , of 200 mL/min using membrane module with 50, 100, and 150 fibers and an absorbent solution containing a mixture of 75 mL of 0.5 wt.% H_2O_2 and 75 mL of 0.5 M HNO_3 .

gas flow rate, hydrogen peroxide concentration and the number of fibers in the membrane module on the NO_x reduction, as well as NO_x absorbed and flux. The experimental results showed that an increase in the feed gas flow rate from 100 to 200 mL/min resulted in a decrease in NO_x reduction from 98 to 94% but significantly effected an increase in the absorbed NO_x and flux from about 0.13 to 0.26 mmol/h and 0.85–1.63 mmol/m².h, respectively, due to the fact that an increase in NO_x concentration in the feed gas effect was dominant than an increase in absorbed NO_x . An increase in hydrogen peroxide concentration from 0.25 to 5 wt.% in the absorbent solutions increased NO_x reduction, absorbed NO_x and flux from 94 to 98%, 0.257–0.267 mmol/h and

1.09–1.13 mmol/m².h. This resulted to increment approximately 4.3, 3.5 and 3.7%, respectively as H_2O_2 plays an important role in enhancing HNO_2 oxidation to HNO_3 . Furthermore, an increase in the number of fibers from 50 to 150 in the membrane module increased NO_x reduction and absorbed NO_x from about 86 to 97% and 0.23–0.27 mmol/h. The percentage increment is approximately 12.8 and 17.4, respectively. The flux decreased from 2.98 to 1.13 mmol/m².h, representing an approximate of 62% decreased due to an increase in gas-liquid contact surface area. Subsequently, the performance of other applicable absorbent solutions for NO_x reduction should be addressed to find the best solution for NO_x reduction through the hollow fiber membrane module.

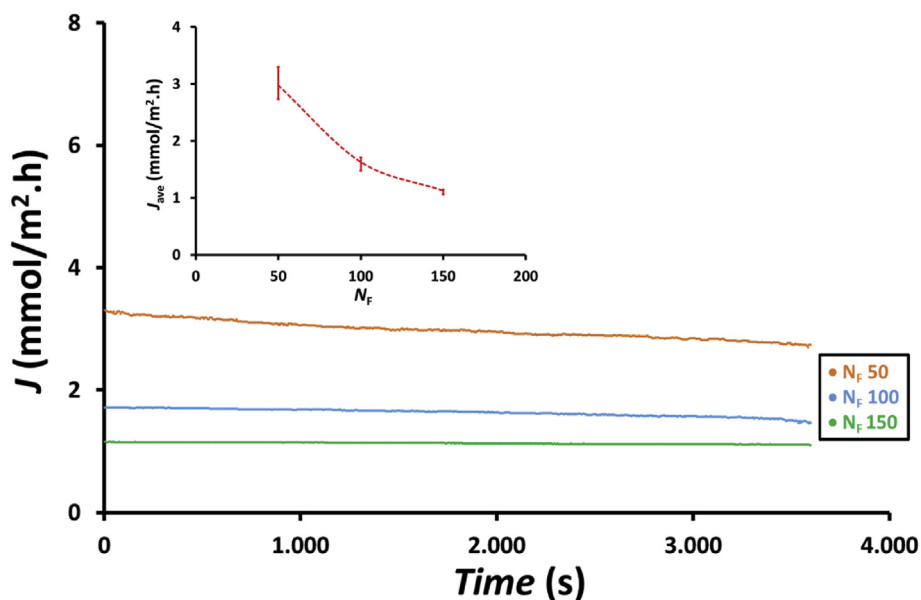


Figure 12. Profile of flux, J , with time and the effect of the number of fibers in the membrane module, N_F , on the average flux, J_{ave} (inset figure) at feed gas flow rate, Q_G , of 200 mL/min using membrane module with 50, 100 and 150 fibers and an adsorbent solution containing a mixture of 75 mL of H_2O_2 0.5 wt.% and 75 mL of 0.5 M HNO_3 .

Declarations

Author contribution statement

Sutrasno Kartohardjono: Conceived and designed the experiments; Performed the experiments; Analyzed and interpreted the data; Contributed reagents, materials, analysis tools or data; Wrote the paper.

Clarissa Merry, Mohamad Sofwan Rizky & Catharina Candra Pratita: Performed the experiments; Analyzed and interpreted the data; Contributed reagents, materials, analysis tools or data.

Funding statement

This work was supported by the Q1Q2 Project of Universitas Indonesia through Grant No. NKB-0326/UN2.R3.1/HKP.05.00/2019.

Competing interest statement

The authors declare no conflict of interest.

Additional information

No additional information is available for this paper.

References

- Y. Liu, Q. Wang, J. Pan, Novel process of simultaneous removal of nitric oxide and sulfur dioxide using a vacuum ultraviolet (vuv)-activated $O_2/H_2O/H_2O_2$ system in a wet vuv-spraying reactor, *Environ. Sci. Technol.* 50 (23) (2016) 12966–12975.
- T. Li, G. Xu, J. Rong, H. Chen, C. He, M. Giordano, Q. Wang, The acclimation of *Chlorella* to high-level nitrite for potential application in biological NO_x removal from industrial flue gases, *J. Plant Physiol.* 195 (2016) 73–79.
- L. Gao, C. Li, P. Lu, J. Zhang, X. Du, S. Li, L. Tang, J. Chen, G. Zheng, Simultaneous removal of Hg_0 and NO from simulated flue gas over columnar activated coke granules loaded with $La_2O_3-CeO_2$ at low temperature, *Fuel* 215 (2018) 30–39.
- P. Sun, X. Cheng, Z. Wang, Y. Lai, C. Ma, J. Chang, NO_x reduction by CO over ASC catalysts in a simulated rotary reactor: effect of reaction conditions, *J. Energy Inst.* 92 (3) (2019) 488–501.
- S. Mohan, P. Dinesha, S. Kumar, NO_x reduction behaviour in copper zeolite catalysts for ammonia SCR systems: a review, *Chem. Eng. J.* (2019) 123253.
- J. Soto-Hernández, C.R. Santiago-Ramirez, E. Ramirez-Meneses, M. Luna-Trujillo, J.-A. Wang, L. Lartundo-Rojas, A. Manzo-Robledo, Electrochemical reduction of NO_x species at the interface of nanostructured Pd and PdCu catalysts in alkaline conditions, *Appl. Catal. B Environ.* 259 (2019) 118048.
- A.G. Chmielewski, E. Zwolińska, J. Licki, Y. Sun, Z. Zimek, S. Bulka, A hybrid plasma-chemical system for high- NO_x flue gas treatment, *Radiat. Phys. Chem.* 144 (2018) 1–7.
- S. Roy, A. Baiker, NO_x Storage-reduction catalysis: from mechanism and materials properties to storage-reduction performance, *Chem. Rev.* 109 (9) (2009) 4054–4091.
- J.-H. Park, J.-W. Ahn, K.-H. Kim, Y.-S. Son, Historic and futuristic review of electron beam technology for the treatment of SO_2 and NO_x in flue gas, *Chem. Eng. J.* 355 (2019) 351–366.
- L. Tan, Y. Guo, Z. Liu, P. Feng, Z. Li, An investigation on the catalytic characteristic of NO_x reduction in SCR systems, *J. Taiwan Inst. Chem. Eng.* 99 (June 2019) 53–59.
- O. Ghriess, H.B. Amor, M.-R. Jeday, D. Thomas, Nitrogen oxides absorption into aqueous nitric acid solutions containing hydrogen peroxide tested using a cables-bundle contactor, *Atmos. Pollut. Res.* 10 (1) (2019) 180–186.
- S. Brandenberger, O. Kröcher, A. Tissler, R. Althoff, The state of the art in selective catalytic reduction of NO_x by ammonia using metal-exchanged zeolite catalysts, *Catal. Rev. Sci. Eng.* 50 (4) (2008) 492–531.
- K. Jug, T. Homann, T. Bredow, Reaction mechanism of the selective catalytic reduction of NO with NH_3 and O_2 to N_2 , *J. Phys. Chem. A* 108 (15) (2004) 2966–2971.
- M. Mehrling, M. Elsener, O. Kröcher, Selective catalytic reduction of NO_x with ammonia over soot, *ACS Catal.* 2 (7) (2012) 1507–1518.
- A. Grossale, I. Nova, E. Tronconi, Study of a Fe-zeolite-based system as NH_3 -SCR catalyst for diesel exhaust aftertreatment, *Catal. Today* 136 (1–2) (2008) 18–27.
- Z.-y. Wang, R.-t. Guo, X. Shi, W.-g. Pan, J. Liu, X. Sun, S.-w. Liu, X.-y. Liu, H. Qin, The enhanced performance of Sb-modified Cu/TiO_2 catalyst for selective catalytic reduction of NO_x with NH_3 , *Appl. Surf. Sci.* 475 (2019) 334–341.
- B. Ye, M. Lee, B. Jeong, J. Kim, D.H. Lee, J.M. Baik, H.-D. Kim, Partially reduced graphene oxide as a support of Mn-Ce/ TiO_2 catalyst for selective catalytic reduction of NO_x with NH_3 , *Catal. Today* 328 (2019) 300–306.
- L. Guo, C. Han, S. Zhang, Q. Zhong, J. Ding, B. Zhang, Y. Zeng, Enhancement effects of O_2 - and OH radicals on NO_x removal in the presence of SO_2 by using an O_3/H_2O_2 AOP system with inadequate O_3 (O_3/NO molar ratio= 0.5), *Fuel* 233 (2018) 769–777.
- Y. Wu, B. Chu, M. Zhang, Y. Yi, L. Dong, M. Fan, G. Jin, L. Zhang, B. Li, Influence of calcination temperature on the catalytic properties of $LaCuO_2$, $25CoO_2$, $75O_3$ catalysts in NO_x reduction, *Appl. Surf. Sci.* 481 (2019) 1277–1286.
- D.W. Johnson, Removal of Hg , NO_x , and SO_x with Using Oxidants and Staged Gas/Liquid Contact, Google Patents, 2009.
- J. Wang, C. Wu, J. Chen, H. Zhang, Denitrification removal of nitric oxide in a rotating drum biofilter, *Chem. Eng. J.* 121 (1) (2006) 45–49.
- X. Liu, C.a. Wang, T. Zhu, Q. Lv, Y. Li, D. Che, Simultaneous removal of NO_x and SO_2 from coal-fired flue gas based on the catalytic decomposition of H_2O_2 over $Fe_2(MoO_4)_3$, *Chem. Eng. J.* 371 (2019) 486–499.
- L. Guo, Y. Shu, J. Gao, Present and future development of flue gas control technology of $DeNO_x$ in the world, *Energy Procedia* 17 (2012) 397–403.

- [24] D. Thomas, J. Vanderschuren, Analysis and prediction of the liquid phase composition for the absorption of nitrogen oxides into aqueous solutions, *Separ. Purif. Technol.* 18 (1) (1999) 37–45.
- [25] Y. Wang, X. Yu, Removal of NO research in A polypropylene hollow fiber membrane contactor, in: 2017 6th International Conference on Energy, Environment and Sustainable Development (ICEESD 2017), Atlantis Press, 2017.
- [26] S. Atcharyawut, C. Feng, R. Wang, R. Jiraratananon, D. Liang, Effect of membrane structure on mass-transfer in the membrane gas–liquid contacting process using microporous PVDF hollow fibers, *J. Membr. Sci.* 285 (1-2) (2006) 272–281.
- [27] A. Gabelman, S.-T. Hwang, Hollow fiber membrane contactors, *J. Membr. Sci.* 159 (1) (1999) 61–106.
- [28] I. Liémans, D. Thomas, Simultaneous NO_x and SO_x reduction from oxyfuel exhaust gases using acidic solutions containing hydrogen peroxide, *Energy Procedia* 37 (2013) 1348–1356.
- [29] I. Liemans, B. Alban, J.-P. Tranier, D. Thomas, SO_x and NO_x absorption based removal into acidic conditions for the flue gas treatment in oxy-fuel combustion, *Energy procedia* 4 (2011) 2847–2854.
- [30] D. Wang, W. Teo, K. Li, Selective removal of trace H₂S from gas streams containing CO₂ using hollow fibre membrane modules/contactors, *Separ. Purif. Technol.* 35 (2) (2004) 125–131.
- [31] S. Kartohardjono, N. Saksono, D. Supramono, P. Prawati, No_x removal from air through super hydrophobic hollow fiber membrane contactors, *Int J Technol* 10 (3) (2019) 472–480.
- [32] R. Hao, Y. Mao, X.-z. Mao, Z. Wang, Y. Gong, Z. Zhang, Y. Zhao, Cooperative removal of SO₂ and NO by using a method of UV-heat/H₂O₂ oxidation combined with NH₄OH-(NH₄)₂SO₃ dual-area absorption, *Chem. Eng. J.* 365 (2019) 282–290.
- [33] B. Yang, S. Ma, R. Cui, S. Sun, J. Wang, S. Li, Simultaneous removal of NO_x and SO₂ with H₂O₂ catalyzed by alkali/magnetism-modified fly ash: high efficiency, Low cost and Catalytic mechanism, *Chem. Eng. J.* 359 (2019) 233–243.
- [34] R. Cui, B. Yang, S. Li, J. Wang, S. Ma, Heterogeneous Fenton catalysts prepared from modified-fly ash for NO_x removal with H₂O₂, *Catal. Commun.* 119 (2019) 180–184.