



ELSEVIER

Contents lists available at ScienceDirect

Data in brief

journal homepage: www.elsevier.com/locate/dib

Data Article

Dataset to assess the shadow effect of an outdoor microalgae culture

J. González-Camejo ^{a,*}, A. Viruela ^a, M.V. Ruano ^b, R. Barat ^a,
A. Seco ^b, J. Ferrer ^a^a CALAGUA – Unidad Mixta UV-UPV, Institut Universitari d'Investigació d'Enginyeria de l'Aigua i Medi Ambient – IIAMA, Universitat Politècnica de Valencia, Camí de Vera s/n, 46022 Valencia, Spain^b CALAGUA – Unidad Mixta UV-UPV, Departament d'Enginyeria Química, Universitat de Valencia, Avinguda de la Universitat s/n, 46100 Burjassot, Valencia, Spain

ARTICLE INFO

Article history:

Received 24 April 2019

Received in revised form 29 May 2019

Accepted 5 June 2019

Available online 18 June 2019

Keywords:

Microalgae cultivation

Outdoor

Shadow effect

ABSTRACT

This data in brief (DIB) article is related to a Research article [1]. Microalgae biomass absorb the light photons that are supplied to the culture, reducing the light availability in the inner parts of the photobioreactors. This is known as self-shading or shadow effect. This effect has been widely studied in lab conditions, but information about self-shading in outdoor photobioreactors is scarce. How this shadow effect affects the light availability in an outdoor photobioreactor was evaluated. In addition, advantages and disadvantages of different artificial light sources which can overcome light limitation are described.

© 2019 Published by Elsevier Inc. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

1. Data

This data includes information related to the reduction of light intensity within a microalgae culture and how this reduction varies with the microalgae biomass concentration (Fig. 1). The microalgae close to the surface in a photobioreactor (PBR) absorb most of the photons, restricting the light received in

DOI of original article: <https://doi.org/10.1016/j.algal.2019.101511>.

* Corresponding author.

E-mail addresses: jogonca4@upv.es (J. González-Camejo), alvina@upv.es (A. Viruela), m.victoria.ruano@uv.es (M.V. Ruano), rababa@ihma.upv.es (R. Barat), aurora.seco@uv.es (A. Seco), jferrer@hma.upv.es (J. Ferrer).

<https://doi.org/10.1016/j.dib.2019.104143>

2352-3409/© 2019 Published by Elsevier Inc. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Specifications table

Subject area	Environmental engineering
More specific subject area	Wastewater treatment
Type of data	Graph and table.
How data was acquired	Irradiation sensor (Apogee Quantum SQ-200)
Data format	Analysed and raw data
Experimental factors	Grab samples of the cultures (in duplicate)
Experimental features	Monitoring of solar irradiation and biomass concentration of the culture during the start-up phase
Data source location	Valencia, Spain (39°30'04.0"N 0°20'00.1"W)
Data accessibility	Data is included with this article
Related research article	González-Camejo et al. [1]

Value of the data

- This data can be used to select the most appropriate artificial light source to cultivate microalgae.
- The shadow effect of a microalgae culture is evaluated under natural conditions.
- A comparison between shadow effect at high and low biomass concentration is presented.
- This data can be useful to reduce the light limitation in outdoor microalgae cultivation systems.

the inner part of the PBR [2]. This is known as shadow effect or self-shading [3,4]. According to Fig. 1, the difference in the solar radiation between PAR-2 (outside of the PBR) and PAR-1 (2 cm away from the front wall) varied with respect to the volatile suspended solids (VSS) concentration, which was used as measurement of microalgae biomass. It started with a biomass concentration of $160 \text{ mg VSS} \cdot \text{L}^{-1}$ (solar irradiance decreased by 15%) and finished with a biomass concentration of $420 \text{ mg VSS} \cdot \text{L}^{-1}$, causing a 71% reduction in solar irradiance (Fig. 1).

PAR-1 was also placed 5 cm from the front wall, at which point light intensity was noticed.

The shadow effect have been previously evaluated in lab conditions, showing significant reductions of light availability in the culture. By way of example, Huesemann et al. [5] reported that light penetration in open ponds becomes critical when microalgae biomass is around 500 mg L^{-1} , while Anbagan et al. [6] obtained a light reduction from 150 to $7\text{--}10 \mu\text{mol m}^{-2} \text{ s}^{-1}$ at a depth of 10 cm in a lab-

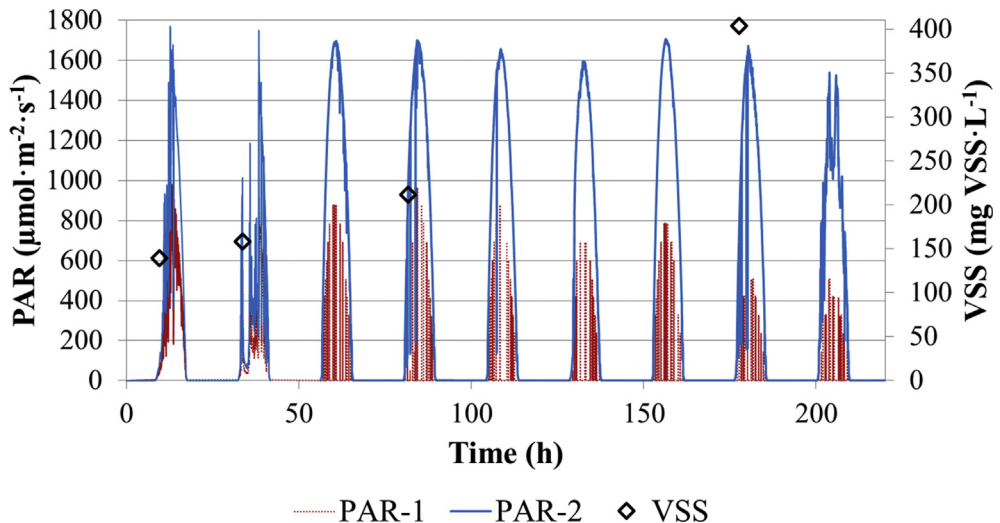


Fig. 1. Evolution of light irradiance inside the culture (PAR-1) and outside the PBR (PAR-2) with increasing volatile suspended solids (VSS) concentration.

Table 1
Advantages and disadvantages of different artificial light sources.

	Advantages	Disadvantages	References
Incandescent light bulbs	<ul style="list-style-type: none"> • Low cost 	<ul style="list-style-type: none"> • Light emitted in infrared region. • Light radiated in all directions. 	[8] [9]
Halogen lamps	<ul style="list-style-type: none"> • Better energetic efficiency than light bulbs. 	<ul style="list-style-type: none"> • Similar spectrum than light bulbs. 	[8] [9]
Fluorescent lamps	<ul style="list-style-type: none"> • Similar spectrum to daily light. 	<ul style="list-style-type: none"> • More expensive than light bulbs and halogen lamps. 	[8]
LED lamps	<ul style="list-style-type: none"> • Narrow wavelength. • High efficiency. • Long lifespan. • Reduce light stress. • Dissipate less energy. 	<ul style="list-style-type: none"> • High cost. 	[3] [8] [10] [11]

scale PBRs with biomass concentrations of around 250 mg L⁻¹. To overcome this shadow effect, additional artificial lighting can be applied to the microalgae culture [7]. Table 1 briefly summarises some advantages and disadvantages of different artificial light sources.

2. Experimental design, materials and methods

In order to assess the shadow effect in the outdoor photobioreactor (PBR) plant [1], an irradiation sensor (Apogee Quantum SQ-200) was placed inside the PBR-A, 2 cm away from the front wall during the start-up phase of Experiment 1 (PAR-1), and another sensor was placed outside the PBR-A (PAR-2) [1].

VSS concentration was measured according to Standard Method 2540-E [12].

Acknowledgements

This research work was supported by the Spanish Ministry of Economy and Competitiveness (MINECO, Projects CTM2014-54980-C2-1-R and CTM2014-54980-C2-2-R) jointly with the European Regional Development Fund (ERDF), both of which are gratefully acknowledged. It was also supported by the Spanish Ministry of Education, Culture and Sport via a pre doctoral FPU fellowship to author J. González-Camejo (FPU14/05082).

Conflict of interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Appendix A. Supplementary data

Supplementary data to this article can be found online at <https://doi.org/10.1016/j.dib.2019.104143>.

References

- [1] J. González-Camejo, A. Viruela, M.V. Ruano, R. Barat, A. Seco, J. Ferrer, Effect of light intensity, light duration and photo-periods in the performance of an outdoor photobioreactor for urban wastewater treatment, *Algal Res* 40 (2019), 101511, <https://doi.org/10.1016/j.algal.2019.101511>.
- [2] M. Barceló-Villalobos, P. Fernández-del Olmo, J.L. Guzmán, J.M. Fernández-Sevilla, F.G. Ación Fernández, Evaluation of photosynthetic light integration by microalgae in a pilot-scale raceway reactor, *Bioresour. Technol.* 280 (2019) 404–411. <https://doi.org/10.1016/j.biortech.2019.02.032>.
- [3] E.G. Nwoba, D.A. Parlevliet, D.W. Laird, K. Alameh, N.R. Moheimani, Light management technologies for increasing algal photobioreactor efficiency, *Algal Res* 39 (2019), 101433, <https://doi.org/10.1016/j.algal.2019.101433>.
- [4] Q. Liao, Y. Sun, Y. Huang, A. Xia, Q. Fu, X. Zhu, Simultaneous enhancement of *Chlorella vulgaris* growth and lipid accumulation through the synergy effect between light and nitrate in a planar waveguide flat-plate photobioreactor, *Bioresour. Technol.* 243 (2017) 528–538. <https://doi.org/10.1016/j.biortech.2017.06.091>.

- [5] M. Huesemann, B. Crowe, P. Waller, A. Chavis, S. Hobbs, S. Edmundson, M. Wigmosta, A validated model to predict microalgae growth in outdoor pond cultures subjected to fluctuating light intensities and water temperatures, *Algal Res* 13 (2016) 195–206. <https://doi.org/10.1016/j.algal.2015.11.008>.
- [6] A. Anbalagan, S. Schwede, C.F. Lindberg, E. Nehrenheim, Influence of hydraulic retention time on indigenous microalgae and activated sludge process, *Water Res.* 91 (2016) 277–284. <https://doi.org/10.1016/j.watres.2016.01.027>.
- [7] S. Abu-Ghosh, D. Fixler, Z. Dubinsky, D. Iluz, Continuous background light significantly increases flashing-light enhancement of photosynthesis and growth of microalgae, *Bioresour. Technol.* 187 (2015) 144–148. <https://doi.org/10.1016/j.biortech.2015.03.119>.
- [8] A.P. Carvalho, S.O. Silva, J.M. Baptista, F.X. Malcata, Light requirements in microalgal photobioreactors: an overview of biophotonic aspects, *Appl. Microbiol. Biotechnol.* 89 (2011) 1275–1288. <https://doi.org/10.1007/s00253-010-3047-8>.
- [9] H.C.P. Matthijs, H. Balke, U.M. van Hes, B.M.A. Kroon, L.R. Mur, R.A. Binot, Application of light-emitting diodes in bio-reactors: flashing light effects and energy economy in algal culture (*Chlorella pyrenoidosa*), *Biotechnol. Bioeng.* 50 (1996) 98–107.
- [10] C. Yan, L. Zhang, X. Luo, Z. Zheng, Effects of various LED light wavelengths and intensities on the performance of purifying synthetic domestic sewage by microalgae at different influent C/N ratios, *Ecol. Eng.* 51 (2013) 24–32. <https://doi.org/10.1016/j.ecoleng.2012.12.051>.
- [11] D. Singh, C. Basu, M. Meinhardt-Wollweber, B. Roth, LEDs for energy efficient greenhouse lighting, *Renew. Sustain. Energy Rev.* 49 (2015) 139–147. <https://doi.org/10.1016/j.rser.2015.04.117>.
- [12] A.P.H.A., A.W.W.A., W.P.C.F., *Standard Methods for the Examination of Water and Wastewater*, twenty-first ed., American Public Health Association, American Water Works Association, Water Pollution Control Federation, Washington DC, 2005.