

SDS–Aluminum Oxide Nanofluid for Enhanced Oil Recovery: IFT, Adsorption, and Oil Displacement Efficiency

Omid Tavakkoli,* Hesam Kamyab,* Radzuan Junin, Veeramuthu Ashokkumar, Ali Shariati, and Abdeliazim Mustafa Mohamed



Cite This: *ACS Omega* 2022, 7, 14022–14030




Read Online

ACCESS |

Metrics & More

Article Recommendations

ABSTRACT: Surfactant flooding is one of the most promising chemical enhanced oil recovery (CEOR) methods to produce residual oil in reservoirs. Recently, nanoparticles (NPs) have attracted extensive attention because of their significant characteristics and capabilities to improve oil recovery. The aim of this study is to scrutinize the synergistic effect of sodium dodecyl sulfate (SDS) as an anionic surfactant and aluminum oxide (Al_2O_3) on the efficiency of surfactant flooding. Extensive series of interfacial tension and surfactant adsorption measurements were conducted at different concentrations of SDS and Al_2O_3 NPs. Furthermore, different surfactant adsorption isotherm models were fitted to the experimental data, and constants for each model were calculated. Additionally, oil displacement tests were performed at 25 °C and atmospheric pressure to indicate the suitability of SDS– Al_2O_3 for CEOR. Analysis of this study shows that the interfacial tension (IFT) reduction between aqueous phase and crude oil is enhanced considerably by 76%, and the adsorption density of SDS onto sandstone rock is decreased remarkably from 1.76 to 0.49 mg/g in the presence of these NPs. Although the effectiveness of NPs gradually increases with the increase of their concentration, there is an optimal value of Al_2O_3 NP concentration. Moreover, oil recovery was increased from 48.96 to 64.14% by adding 0.3 wt % NPs to the surfactant solution, which demonstrates the competency of SDS– Al_2O_3 nanofluids for CEOR.

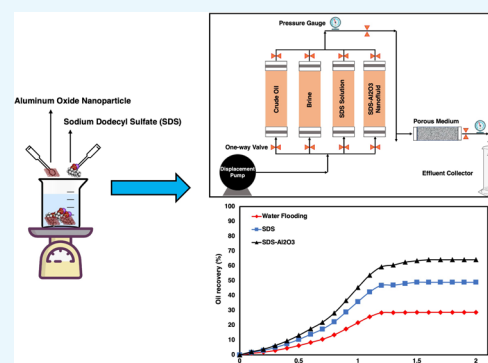

1. INTRODUCTION

Oil production mechanisms are generally divided into three phases: primary, secondary, and tertiary. Primary and secondary recovery techniques can produce only 30% of the original oil in place (OOIP).^{1,2} Therefore, tertiary recovery or enhanced oil recovery (EOR) approaches are applied to recover the remaining oil in reservoirs, which cannot be performed by conventional methods. In this regard, chemical EOR (CEOR) has been considered one of the most promising EOR methods because of its higher performance and technical feasibility compared to other EOR techniques such as thermal and gas flooding.³ Among the used chemicals in CEOR, surfactants, polymers, alkalis, and/or their synergy were found to be advantageous to produce residual oil in reservoir rocks.^{2,4} The mechanism of each chemical type to enhance oil recovery is different; for example, polymers on increasing the viscosity of the displacing fluid reduce the mobility ratio,⁵ and surfactant by reducing interfacial tension (IFT) and alteration wettability toward the water-wet state⁶ enhance macroscopic sweep and microscopic displacement efficiency of crude oil.⁷

Surfactant flooding is reviewed as the most efficient method due to its great ability to decrease the oil/water IFT from the high initial value (20–30 mN/m) to an ultralow value (10^{-3} mN/m) and to alter the wettability of the reservoir rock toward

the water-wet medium, which leads to a significant increase in oil recovery.⁸ Moreover, the presence of surfactant can boost the formation of oil/water emulsion and improve interfacial rheological properties.⁹ However, the fundamental issue during surfactant flooding is the loss of surfactant in the reservoir rock, which diminishes the surfactant flooding performance and its economic viability.¹⁰ Reducing surfactant adsorption onto porous media is one of the most critical factors to evaluate the performance of surfactant flooding.¹¹

To mitigate the surfactant adsorption density on reservoir rock, several studies have been conducted employing various additives such as alkalis and polymers in the last few years.^{12,13} Generally, alkalis by creating negatively charged surfaces on the reservoir rock (mainly sandstone reservoirs), which causes a strong repulsive force between the anionic surfactant and porous media, and increasing the pH of the solution reduce surfactant adsorption.¹⁴ However, the reaction of alkalis with reservoir rock

Received: January 27, 2022

Accepted: March 30, 2022

Published: April 14, 2022



results in the formation of scaling ions, which leads to pore plugging and reduction in reservoir permeability. Furthermore, although polymers have been reported as sacrificial agents to decrease the surfactant adsorption,¹² high costs of polymers and their instability at high temperature and high salinity¹⁵ impair their effectiveness in this matter. Therefore, the significant loss of surfactant in reservoir rock is still a principal problem that needs to be well addressed.

In recent years, nanoparticles (NPs) have been extensively employed in different EOR methods, such as CEOR, to investigate their potential for enhancing oil recovery.^{16,17} In this regard, Rezaei et al.¹⁸ observed that the IFT of SDS solution–oil was decreased by 77% (from 32.5 to 7.5 mN/m) in the presence of 0.05 wt % ZnO NPs. Similarly, Mohajeri et al. pointed out¹⁹ that 100 ppm of ZrO₂ NPs can reduce a cationic surfactant–oil IFT from 18.4 to 5.4 mN/m. In another study, Wu et al.²⁰ demonstrated that the adsorption of an anionic surfactant on sand grains was greatly restrained by adding 5000 ppm SiO₂ NPs. In addition, Zargartalebi et al.²¹ showed that hydrophobic silica NPs are more effective than hydrophilic silica NPs in reducing surfactant adsorption. Zhong et al.²² investigated nonionic surfactant losses on Bakken and Berea rocks with and without SiO₂ NPs and observed a significant relationship between NP efficacy and the nature of adsorbents. Asl et al.¹ reported a 12.7% increase in oil recovery due to the synergistic effect between the amino acid surfactant and SiO₂ NPs. According to an investigation by Gbadamosi et al.,²³ aluminum oxide (Al₂O₃) polymeric nanofluid showed a better performance in viscosity increment, wettability alteration, and consequently oil recovery as compared to SiO₂ polymeric nanofluid. This is due to the stronger adsorption between Al³⁺ of Al₂O₃ and COO⁻ of polymer. This is supported by Bashir Abdullahi et al.²⁴ who analyzed the potential of SiO₂, TiO₂, and Al₂O₃ NPs for EOR and obtained the highest oil displacement efficiency in the presence of Al₂O₃ NPs. To the best of our knowledge, no report has been found to date regarding the efficiency of surfactant–Al₂O₃ NPs as a chemical agent for CEOR.

This study therefore aims to experimentally investigate the capability of Al₂O₃ NPs to improve surfactant flooding performance for CEOR. For this purpose, Al₂O₃ NPs were dispersed within SDS surfactant at various concentrations of surfactant and NPs. The effect of Al₂O₃ NPs on surfactant properties including IFT and adsorption behavior onto sandstone rock was evaluated, and, in this regard, the main mechanisms of better efficiency were discussed. Furthermore, oil displacement experiments were conducted to determine the capability and suitability of SDS–Al₂O₃ nanofluid for CEOR.

2. EXPERIMENTAL SECTION

2.1. Materials. An anionic surfactant sodium dodecyl sulfate (SDS, purity 90%, mol wt 288.38 g/mol) bought from Merck was used in this work. Aluminum oxide nanoparticles (Al₂O₃, with 99% purity, size of 20–30 nm, specific surface area of 80 m²/g) purchased from Skyspring Nanomaterials, Inc., Houston, TX., were used in this study to fabricate the nanofluid. Sodium chloride (NaCl) bought from Merck Group was used as an electrolyte to prepare synthetic reservoir brine. Crude oil from one of the Iranian oil fields was used as the hydrocarbon phase of the porous medium. The properties of the used oil in the experiment are shown in Table 1.

2.2. Preparation of Surfactant Solution. Initially, different amounts of SDS surfactant (e.g., 0.1, 0.15, 0.2, 0.25, 0.3, 0.4

Table 1. Properties of Used Crude Oil in the Experiment

viscosity (cp)	density (g/cc)	°API at 25 °C
26	0.885	29

wt %) were added to 100 mL of deionized water to obtain various concentrations of surfactant solution. Following this, a magnetic stirrer was applied to stir the solution, and stirring was stopped once a homogenous solution was obtained. The surfactant solutions were used in IFT, adsorption experiments, and the oil displacement efficiency test. The IFT method was employed to determine the CMC value of SDS. As presented in Figure 1, IFT is reduced by increasing the concentration of SDS until the inflection point of the curve; thus, 0.24 wt % SDS was determined as the CMC point, which is approximately consistent with the literature.²⁵ The interface of two fluids at the CMC point is fully covered by surfactant molecules, and there is no extra space for molecules; therefore, the addition of surfactant does not cause any remarkable reduction in IFT.

2.3. Preparation of the SDS–Al₂O₃ Nanofluid. To construct various nanofluids, Al₂O₃ NPs were first added to 100 mL of deionized water with different concentrations of NPs (e.g., 0.1, 0.2, 0.3, 0.4 wt %). The fluids were then shaken with an ultrasonic bath for 1 h to obtain a homogenized and stable suspension. Next, SDS powder at desired concentrations (e.g., 0.1, 0.15, 0.2, 0.24 wt %) were added to Al₂O₃ dispersion. The nanofluids were placed in a container and sealed to avoid contact with chemicals during the preparation process.

2.4. IFT Measurement. IFT between the oil phase and aqueous solutions was measured using an Easy Dyne Kruss Tensiometer K-20. All measurements were conducted at ambient temperature (25 °C) and atmospheric pressure employing the Du Nouy Ring method and the Harkins and Jordan ring correction method.

2.5. Static Adsorption Test. In this study, a batch technique was used to measure surfactant and surfactant nanofluid adsorption on sand grains.^{21,26} To do so, first and foremost, the conductivity of the solutions was measured to assess appropriate calibration curves for each series of aqueous solutions.²⁷ Subsequently, surfactant and the surfactant nanofluid were placed in contact with the prepared sand particles with a ratio of 1:15 of sand grains and surfactant solution or nanofluid²² (2 g of sand grains was mixed with 30 mL of fluid) in a horizontal vessel for 20 h (determined by an aging time optimization test) to ensure full interaction. Then, the surfactant solution and nanofluid are separated from sand samples by centrifugation at 2500 rpm for 15 min. After centrifugation, the concentration of fluids in the supernatant was measured employing appropriate calibration curves. The reason for using the conductivity method is that the concentration of solutions is independent of NP concentration.²¹ By knowing the initial surfactant concentration and the equilibrium concentration, the adsorption density of surfactant can be calculated using eq 1²²

$$q_e = \frac{V(C_i - C_{eq})}{m} \quad (1)$$

where q_e represents the adsorption density of surfactant (mg/g), V is the volume of the surfactant solution (L), C_i is the initial concentration of the solution (mg/L), C_{eq} is the surfactant concentration after being equilibrated with sand grains (mg/L), and m is the total mass of sandstone.

2.6. Oil Displacement Test. The influence of Al₂O₃ NPs on the efficiency of surfactant flooding for CEOR was studied by

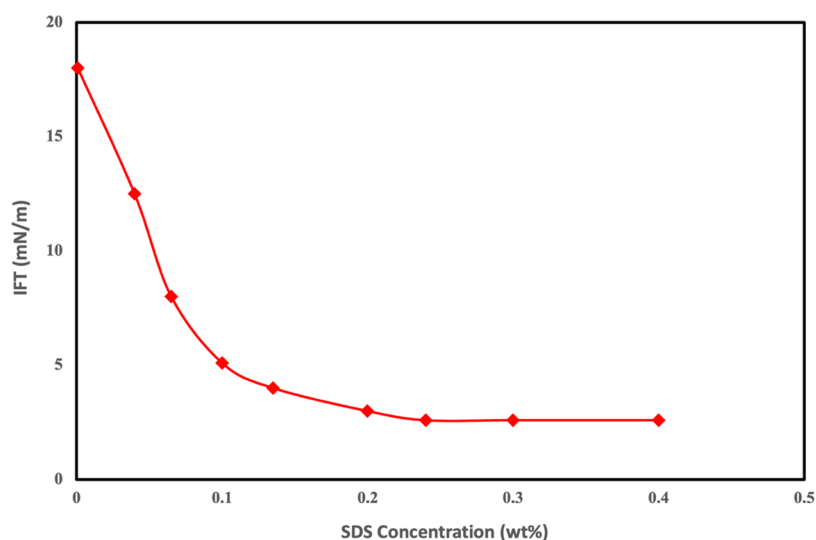


Figure 1. IFT value versus SDS concentration to determine the CMC point.

conducting sandpack flooding experiments. Sandpacks were loaded with sand grains in the range of 50–100 μm to represent a homogeneous porous medium. Table 2 shows the properties of

Table 2. Characteristics of Sandpacks

case	dimension (cm)		porosity (%)	permeability (mD)
	length	diameter		
water flooding	32.5	2.54	25.7	323
SDS solution flooding	31	2.51	24.2	301
SDS– Al_2O_3 nanofluid flooding	32	2.56	23.4	292

sandpacks for each flooding test. To prepare the sandpacks for the oil displacement test, sandpacks were vacuumed to remove

air trapped in porous media. Following this, sandpacks were saturated with prepared synthetic brine (3 wt %), and the crude oil was then injected to replace formation water until there was no water from the sandpack (S_{wc}). Formation water (3 wt % brine) was flooded at a constant flow rate of 0.25 cc/min until no more oil was observed in the effluent to evaluate the efficiency of water flooding. Moreover, SDS solution and SDS– Al_2O_3 nanofluid flooding were injected into sandpacks, which was continued until 2 pore volume (PV) was injected. All tests were conducted at ambient temperature (25 $^\circ\text{C}$) and atmospheric pressure (Figure 2).

3. RESULTS AND DISCUSSION

3.1. Effect of Al_2O_3 NPs on IFT. As mentioned earlier, one of the CEOR functions is to decrease IFT between aqueous

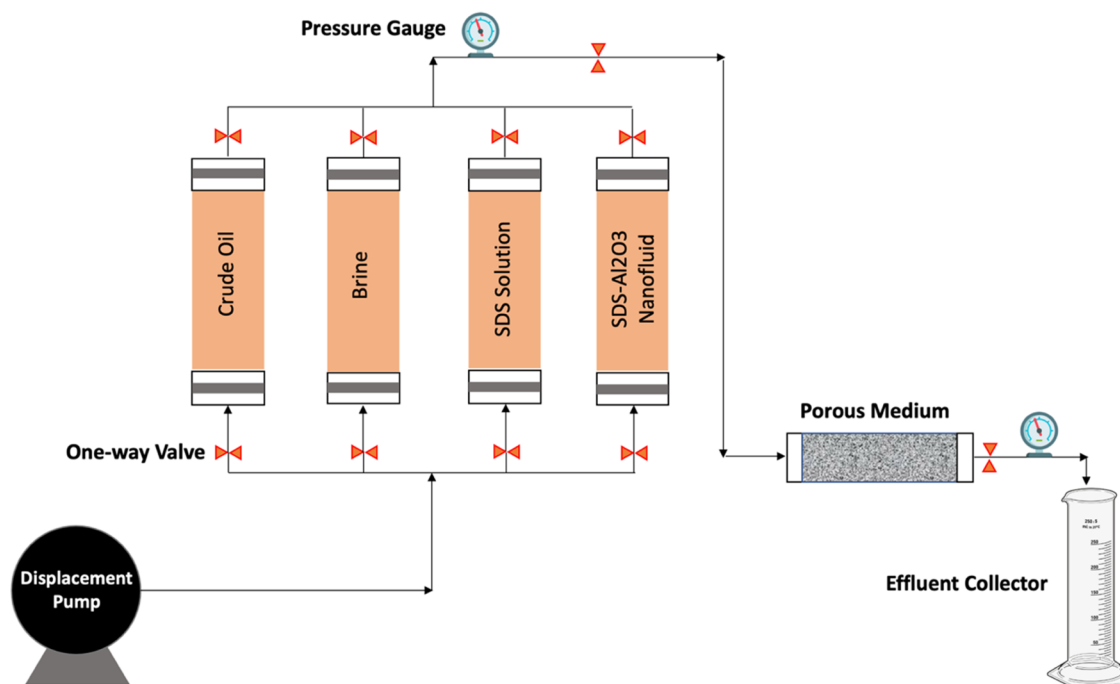


Figure 2. Schematic of the apparatus for the oil displacement test.

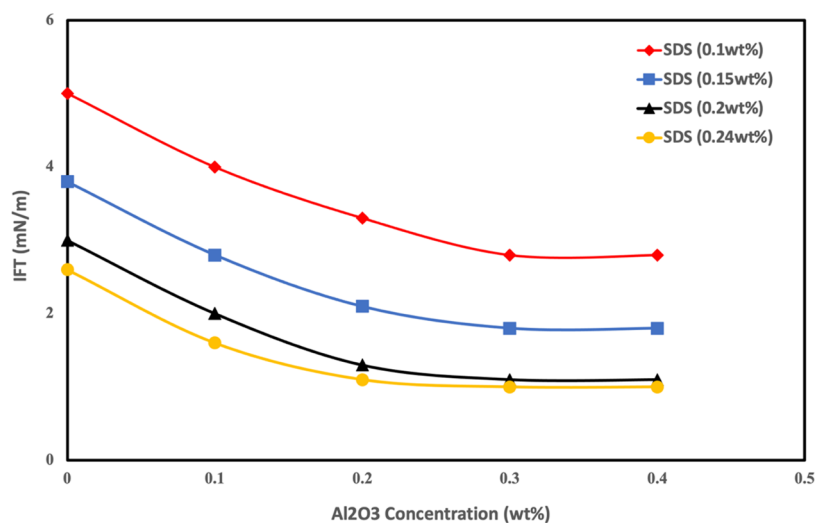


Figure 3. IFT between the SDS solution and crude oil at different concentrations of Al₂O₃ NPs.

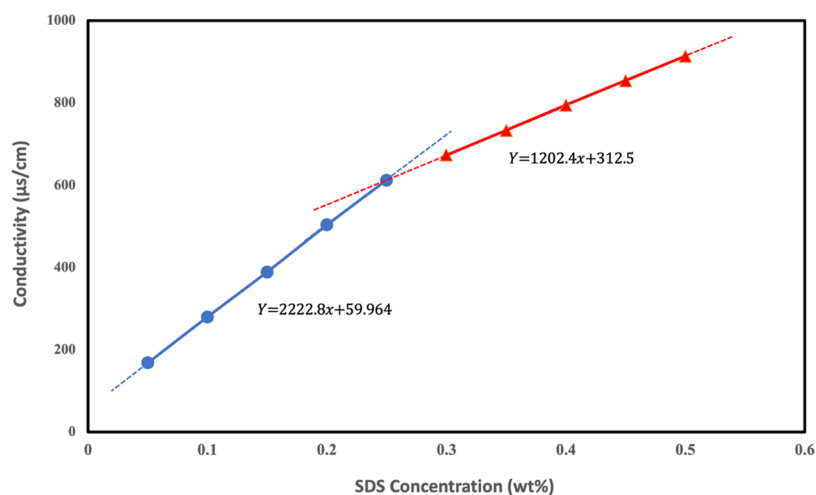


Figure 4. Calibration curve for SDS concentration using the conductivity method.

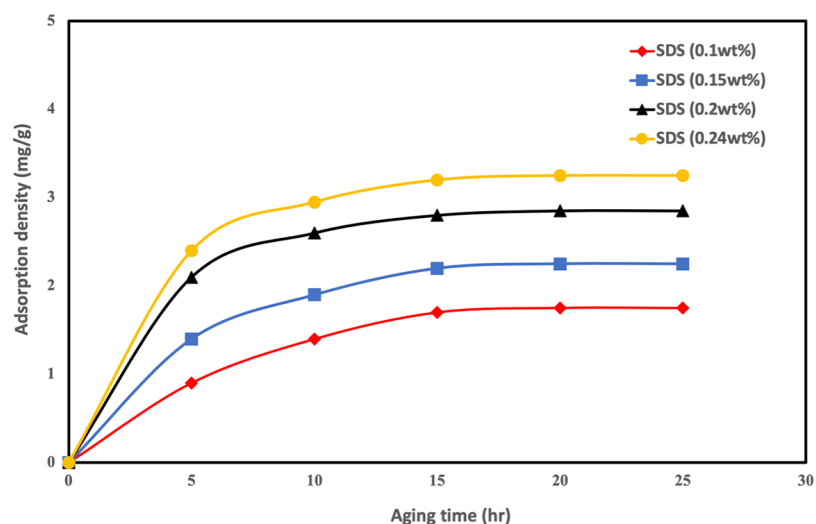


Figure 5. Effect of aging time on surfactant adsorption.

phase and oil phase. The capillary number is a dimensionless quantity that represents the ratio between viscous forces and capillary forces (commonly around 10^{-7} for water flooding). A

higher value of capillary number (10^{-4} – 10^{-2}) means a lesser amount of residual oil saturation in the reservoir.² To achieve such a high number, the IFT needs to be decreased to an

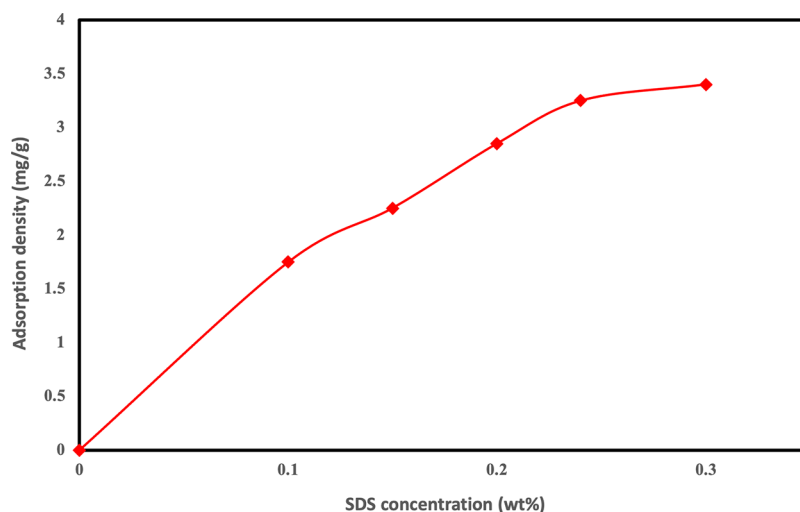


Figure 6. SDS adsorption on sandstone versus SDS concentration.

Table 3. Constants and Error Parameter of Two-Parameter and Three-Parameter Adsorption Isotherm Models^a

isotherm model	nonlinear form	linear form	parameters
Langmuir	$q_e = \frac{q_o K_L C_e}{1 + K_L C_e}$	$\frac{C_e}{q_e} = \frac{1}{K_L q_o} + \frac{C_e}{q_o}$	$q_o = 6.578$ $K_L = 0.0004$ $R^2 = 0.9576$
Freundlich	$q_e = b C_e^{1/n}$	$\ln q_e = \ln b + 1/n \ln C_e$	$n = 1.617$ $b = 0.026$ $R^2 = 0.9772$
Temkin	$q_e = \frac{RT}{b} \ln(K_m C_e)$	$q_e = \frac{RT}{b} \ln C_e + \frac{RT}{b} \ln K_m$	$b = 1603.16$ $K_m = 0.0034$ $R^2 = 0.9782$
Elovich	$\frac{q_e}{q_o} = K_e C_e e^{-(q_e/q_o)}$	$\ln \frac{q_e}{C_e} = \ln K_e q_o - \frac{q_e}{q_o}$	$q_o = 4.273$ $K_e = 0.0006$ $R^2 = 0.8659$
Redlich–Peterson	$q_e = \frac{K_r C_e}{1 + \alpha C_e^\beta}$	$\ln\left(\frac{C_e}{q_e}\right) = \beta \ln C_e - \ln K_r$	$\beta = 0.3816$ $K_r = 3.626$ $\alpha = 137.48$ $R^2 = 0.9423$

^a q_e , q_o , and C_e are the equilibrium adsorption (mg/g), the maximum amount of surfactant adsorption (mg/g), and the adsorbate's equilibrium concentration (mg/L), respectively.

ultralow value (10^{-3} mN/m).²⁸ Hence, IFT between SDS and crude oil in the absence and presence of Al_2O_3 NPs was measured to study the influence of NPs for further reduction in IFT. IFT reduction generally occurs when SDS and NPs are adsorbed at the fluid–fluid interface.²⁹

Figure 3 illustrates IFT between the SDS solution and oil phase in the presence of Al_2O_3 NPs at different concentrations. As can be seen, the IFT decreased sharply on augmenting the concentration of NPs dispersed in SDS solutions, in which 0.3 wt % NPs reduced IFT by 76% when used with 0.1 wt % SDS. This significant reduction of IFT in the presence of NPs is mainly attributed to the ability of NPs to carry surfactant molecules by Brownian motion to the interfacial area.^{30,31} As a matter of fact, the existence of extra surfactant molecules at the liquid–liquid interface diminishes the IFT value. According to the presented result in Figure 3, no IFT improvement was observed beyond 0.3 wt % Al_2O_3 NPs; a similar trend at all concentrations of SDS was observed. This can be explained by

the formation of NP aggregates at concentrations higher than 0.3 wt %, which disturbs the functioning of NPs as the carrier of surfactant molecules. Additionally, the negligible influence of NPs on IFT reduction was experienced at the CMC point. This is due to the saturation of the oil/water interface with surfactant molecules, and the existence of extra molecules is impossible at this point.¹⁶ In general, the interaction of NPs and surfactants can lessen the IFT in the favor of CEOR.

3.2. Effect of Al_2O_3 NPs on Surfactant Adsorption. As mentioned earlier, the adsorption of surfactant onto reservoir rock is one of the most important parameters to evaluate the efficiency of surfactant flooding. Surfactant loss means a remarkable reduction of its concentration in chemical solutions and therefore an increase in oil/water IFT. As a result, the flooding process fails to meet its technical and economic objectives.^{31,32} Generally, electrostatic interactions and van der Waals interactions between rock surfaces and surfactants are considered the main mechanisms of adsorption.^{28,33}

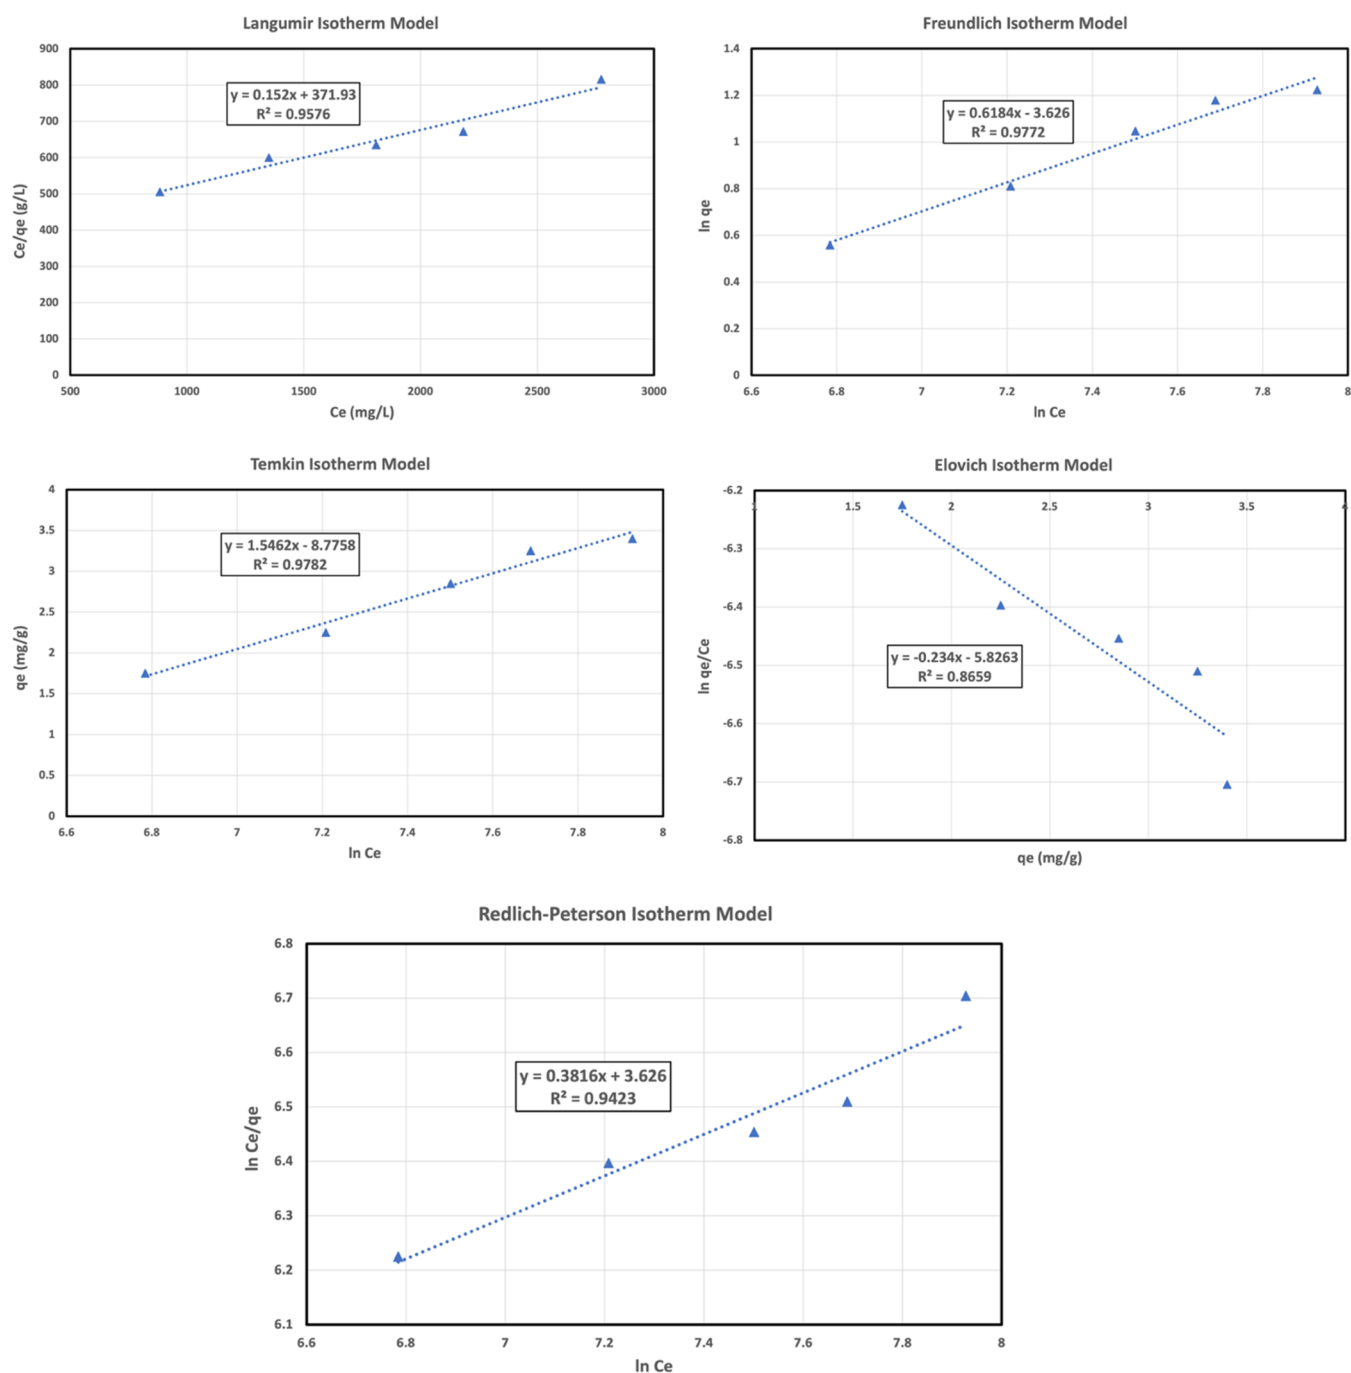


Figure 7. Langmuir, Freundlich, Temkin, Elovich (two-parameter), and Redlich–Peterson (three-parameter) adsorption isotherm fitting curves.

To measure the surfactant concentration after interaction with reservoir rock, the conductivity technique was used since solution conductivity is independent of NP concentration.²¹ The conductance values were plotted against various surfactant solutions from 500 to 5000 ppm. Figure 4 shows the calibration curve of SDS concentration, which was used to analyze the adsorption behavior of surfactant onto sandstone rock in this study.

Prior to the static adsorption test, the effect of adsorption time on adsorption density was investigated to ensure that equilibrium was reached during experiments. The adsorption density of different concentrations of SDS was plotted against adsorption time in the range from 5 to 25 h. Figure 5 demonstrates the result of SDS adsorption against time. As can

be seen, in the early stage, SDS adsorption increased gradually until 15 h of aging time. Following this, there was a consistent change for 10 h, which means the adsorption of SDS onto sand grains reached equilibrium after 15 h. Accordingly, the experimented fluids (SDS solution and nanofluid) were placed in contact with sand grains for 20 h to ensure that equilibrium was reached during static adsorption tests. Figure 6 shows SDS adsorption density on sandstone against SDS concentration.

Table 3 and Figure 7 present the analysis of experimental adsorption data and calculated parameters and R^2 values for various two-parameter and three-parameter isotherm models, respectively. It is clear that the Temkin isotherm, which assumes a multilayer adsorption process, is a more appropriate model to fit experimental adsorption data compared to other models as

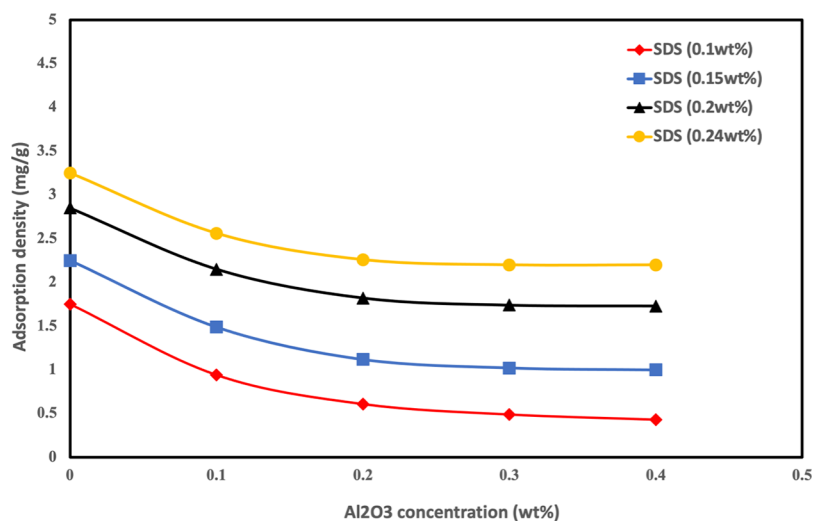


Figure 8. Adsorption density of SDS versus Al₂O₃ concentration.

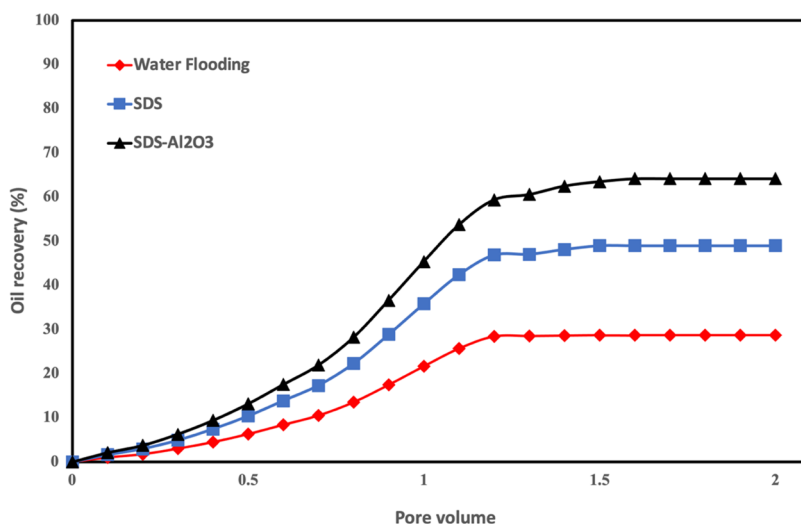


Figure 9. Oil recovery percentage versus pore volume injected for water flooding, surfactant flooding, and surfactant nanofluid flooding.

the R^2 value is higher than those of other isotherms. Although the Temkin isotherm is the best-fitted model, according to R^2 values, Langmuir and Freundlich models are desirable as well. A practical parameter associated with the Langmuir model is the separation factor (R_L), which determines the favorability of the adsorption process. R_L can be calculated using eq 2

$$R_L = \frac{1}{1 + K_L C_0} \quad (2)$$

where K_L is the Langmuir constant and C_0 represents the highest initial concentration of surfactant.

Generally, $L_R < 1$ implies favorable, $L_R > 1$ shows unfavorable, and $L_R \sim 0$ and $L_R = 1$ indicate irreversible and linear adsorption processes, respectively. The values of R_L in this work are between 0.454 and 0.714, which shows that the adsorption of surfactant on sand grains is favorable. Additionally, a value of $0 < 1/n > 1$ in the Freundlich model shows the adsorption process is favorable. The value of $1/n$ in this study is 0.618 (consistent with findings of the R_L value in the Langmuir model).

The influence of NPs on the adsorption of varied SDS solutions on sandstone rock at varied concentrations was investigated. At the same concentration of the SDS solution, the

adsorption density decreases considerably in the presence of NPs as presented in Figure 8. The adsorption of 0.1 wt % SDS was 1.76 mg/g in the absence of NPs, which decreased to 0.49 mg/g (72%) on adding 0.3 wt % Al₂O₃ NPs to the solution. Besides, the adsorption value was reduced from 3.25 to 2.2 mg/g (32.3%) in the presence of 0.3 wt % NPs at the CMC point. It was concluded that surfactant molecules prefer to be adsorbed on NPs instead of sand grains; in addition, the retained NPs may shield the sand wall, thus resulting in a significant reduction in surfactant adsorption.^{28,34}

It is also important to mention that the effect of Al₂O₃ NPs in restraining the adsorption of SDS is negligible beyond 0.3 wt %, which can also be attributed to the formation of aggregates at concentrations higher than 0.3 wt %.²⁰ According to the IFT and adsorption test results, 0.3 wt % aluminum oxide NPs was selected as the optimum concentration of NPs in SDS solution. Overall, the adsorption of SDS on sandstone rock is largely preventable by employing NPs, which can increase the economic feasibility of surfactant flooding.

3.3. Flooding Test. Three flooding tests were conducted to evaluate the effectiveness of SDS–Al₂O₃ for CEOR and to compare it with SDS and water flooding. In this respect, the oil

recovery percentage versus the volume of injected fluid (water, SDS solution, SDS–Al₂O₃ nanofluid) is illustrated in Figure 9. As mentioned in the flooding test section, parameters such as the injected volume of fluid and the flow rate were the same during all flooding processes, and 2 PV of fluid was injected into the sandpacks. As presented in Figure 9, the highest oil recovery for brine (3 wt %) flooding was obtained at 1.5 PV, and no increase beyond 28.7% of OOIP was observed after this amount of fluid was injected into the sandpack. As the next step, 0.24 wt % SDS solution and SDS–Al₂O₃ nanofluids at an optimum concentration were flooded into sandpacks, and the results of these processes are shown in Figure 9. Greater oil recovery was observed for Al₂O₃ dispersion in SDS solution in comparison to the other flooding tests; the SDS solution in the presence of NPs caused 64.14% oil recovery, while this figure for SDS solution was 48.96%. The better performance of the SDS–Al₂O₃ nanofluid is due to the fact that NPs can greatly restrain the adsorption of surfactant onto reservoir rock. Besides, the friction caused by NPs on the adsorbent strips off the adsorbed molecules from the rock surface, hence reducing the surfactant adsorption.²⁰ Furthermore, NPs enhance IFT reduction, leading to a considerable improvement in the chemical flooding efficiency.

4. CONCLUSIONS

In this study, the capability of Al₂O₃ NPs to enhance surfactant efficiency was investigated. Prior to flooding experiments, the impact of nanoparticles on surfactant properties including IFT and adsorption behavior on sand grains was explored. The outcomes indicate a rapid decrease of IFT between aqueous phase and oil by adding Al₂O₃ NPs to the SDS solution. Moreover, surfactant adsorption onto sandstone rock was generally reduced in the presence of Al₂O₃ NPs, and this decrease was much more significant at higher concentrations of these NPs. Although the effectiveness of NPs gradually increases with an increase in their concentration, there is an optimal value of Al₂O₃ NP concentration. IFT and surfactant adsorption experiments revealed that beyond 0.3 wt % Al₂O₃ NPs, the effect of NPs is insignificant, and this concentration was selected for oil displacement experiments. Consequently, flooding tests showed that NPs can efficiently enhance the surfactant flooding performance and greater additional oil recovery can be obtained by adding NPs into the surfactant solution.

AUTHOR INFORMATION

Corresponding Authors

Omid Tavakkoli – Department of Petroleum Engineering, Faculty of Chemical and Energy Engineering, Universiti Teknologi Malaysia, 81310 Skudai, Johor Bahru, Malaysia; orcid.org/0000-0002-2417-0931; Email: omidtavakkoli950@gmail.com

Hesam Kamyab – Malaysia-Japan International Institute of Technology, Universiti Teknologi Malaysia, 54100 Kuala Lumpur, Malaysia; Department of Biomaterials, Saveetha Dental College and Hospital, Saveetha Institute of Medical and Technical Sciences, Saveetha University, Chennai 600 077, India; orcid.org/0000-0002-5272-2297; Email: khesam2@live.utm.my, hesam_kamyab@yahoo.com

Authors

Radzuan Junin – Department of Petroleum Engineering, Faculty of Chemical and Energy Engineering, Universiti Teknologi

Malaysia, 81310 Skudai, Johor Bahru, Malaysia; Institute for Oil and Gas, Universiti Teknologi Malaysia, 81310 Johor Bahru, Malaysia

Veeramuthu Ashokkumar – Center for Transdisciplinary Research, Department of Pharmacology, Saveetha Dental College, Saveetha Institute of Medical and Technical Sciences, Saveetha University, Chennai 600077, India

Ali Shariati – Institute of Research and Development, Duy Tan University, Da Nang 550000, Viet Nam

Abdeliazim Mustafa Mohamed – College of Engineering, Department of Civil Engineering, Prince Sattam bin Abdulaziz University, Alkharj 16273, Saudi Arabia; Building & Construction Technology Department, Bayan University, 210 Khartoum, Sudan

Complete contact information is available at:

<https://pubs.acs.org/10.1021/acsomega.2c00567>

Notes

The authors declare no competing financial interest.

ACKNOWLEDGMENTS

The authors gratefully acknowledge support from the Department of Petroleum Engineering, Faculty of Chemical and Energy Engineering, Universiti Teknologi Malaysia, and the Post-Doctoral fellow (Teaching and Learning) Scheme under the Malaysia-Japan International Institute of Technology, Universiti Teknologi Malaysia (UTM).

REFERENCES

- (1) Asl, H. F.; Zargar, G.; Manshad, A. K.; Takassi, M. A.; Ali, J. A.; Keshavarz, A. Effect of SiO₂ nanoparticles on the performance of L-Arg and L-Cys surfactants for enhanced oil recovery in carbonate porous media. *J. Mol. Liq.* **2020**, *300*, No. 112290.
- (2) Kamal, M. S.; Hussein, I. A.; Sultan, A. S. Review on Surfactant Flooding: Phase Behavior, Retention, IFT, and Field Applications. *Energy Fuels* **2017**, *31*, 7701–7720.
- (3) Mandal, A. Chemical flood enhanced oil recovery: a review. *Int. J. Oil, Gas Coal Technol.* **2015**, *9*, 241.
- (4) Kalam, S.; Kamal, M. S.; Patil, S.; Hussain, S. M. S. Impact of Spacer Nature and Counter Ions on Rheological Behavior of Novel Polymer-Cationic Gemini Surfactant Systems at High Temperature. *Polymers* **2020**, *12*, 1027.
- (5) (a) Rezaei, A.; Abdi-Khangah, M.; Mohebbi, A.; Tatar, A.; Mohammadi, A. H. Using surface modified clay nanoparticles to improve rheological behavior of Hydrolyzed Polyacrylamid (HPAM) solution for enhanced oil recovery with polymer flooding. *J. Mol. Liq.* **2016**, *222*, 1148–1156. (b) Wang, Y.; He, Z.; Chen, W.; Liu, Y.; Ding, M.; Yang, Z.; Qian, C. Stability and rheological properties of HPAM/nanosilica suspensions: Impact of salinity. *Colloids Surf., A* **2020**, *587*, No. 124320.
- (6) (a) Betancur, S.; Olmos, C. M.; Pérez, M.; Lerner, B.; Franco, C. A.; Riazi, M.; Gallego, J.; Carrasco-Marín, F.; Cortés, F. B. A microfluidic study to investigate the effect of magnetic iron core-carbon shell nanoparticles on displacement mechanisms of crude oil for chemical enhanced oil recovery. *J. Pet. Sci. Eng.* **2020**, *184*, No. 106589. (b) Ngo, I.; Sasaki, K.; Nguele, R.; Sugai, Y. Formation Damage Induced by Water-Based Alumina Nanofluids during Enhanced Oil Recovery: Influence of Postflush Salinity. *ACS Omega* **2020**, *5*, 27103–27112.
- (7) Ngo, I.; Sasaki, K.; Ma, L.; Nguele, R.; Sugai, Y. Enhancing surfactant desorption through low salinity water post-flush during Enhanced Oil Recovery. *Oil Gas Sci. Technol. – Rev. IFP Energies nouvelles* **2021**, *76*, 68.
- (8) (a) Belhaj, A. F.; Elraies, K. A.; Mahmood, S. M.; Zulkifli, N. N.; Akbari, S.; Hussien, O. S. The effect of surfactant concentration, salinity, temperature, and pH on surfactant adsorption for chemical

- enhanced oil recovery: a review. *J. Pet. Explor. Prod. Technol.* **2020**, *10*, 125–137. (b) Hirasaki, G.; Zhang, D. L. Surface Chemistry of Oil Recovery From Fractured, Oil-Wet, Carbonate Formations. *SPE Journal* **2004**, *9*, 151–162. (accessed 3/31/2021). (c) Olajire, A. A. Review of ASP EOR (alkaline surfactant polymer enhanced oil recovery) technology in the petroleum industry: Prospects and challenges. *Energy* **2014**, *77*, 963–982.
- (9) (a) Fu, L.; Zhang, G.; Ge, J.; Liao, K.; Pei, H.; Jiang, P.; Li, X. Study on organic alkali-surfactant-polymer flooding for enhanced ordinary heavy oil recovery. *Colloids Surf., A* **2016**, *508*, 230–239. (b) Iglauer, S.; Rahman, T.; Sarmadivaleh, M.; Al-Hinai, A.; Fernø, M. A.; Lebedev, M. Influence of Wettability on Residual Gas Trapping and Enhanced Oil Recovery in Three-Phase Flow: A Pore-Scale Analysis by Use of Microcomputed Tomography. *SPE J.* **2016**, *21*, 1916–1929. (accessed 1/3/2022). (c) Mahboob, A.; Kalam, S.; Kamal, M. S.; Hussain, S. M. S.; Solling, T. EOR Perspective of microemulsions: A review. *J. Pet. Sci. Eng.* **2022**, *208*, No. 109312.
- (10) (a) Curbelo, F. D. S.; Santanna, V. C.; Neto, E. L. B.; Dutra, T. V.; Dantas, T. N. C.; Neto, A. A. D.; Garnica, A. I. C. Adsorption of nonionic surfactants in sandstones. *Colloids Surf., A* **2007**, *293*, 1–4. (b) Ma, K.; Cui, L.; Dong, Y.; Wang, T.; Da, C.; Hirasaki, G. J.; Biswal, S. L. Adsorption of cationic and anionic surfactants on natural and synthetic carbonate materials. *J. Colloid Interface Sci.* **2013**, *408*, 164–172. (c) Wang, D.; Maubert, M.; Pope, G. A.; Liyanage, P. J.; Jang, S. H.; Upamali, K. A.; Chang, L.; Tagavifar, M.; Sharma, H.; Ren, G.; et al. Reduction of Surfactant Retention in Limestones Using Sodium Hydroxide. *SPE J.* **2019**, *24*, 92–115. (accessed 1/3/2022). (d) Kalam, S.; Abu-Khamsin, S. A.; Kamal, M. S.; Patil, S. Surfactant Adsorption Isotherms: A Review. *ACS Omega* **2021**, *6*, 32342–32348.
- (11) Kalam, S.; Abu-Khamsin, S. A.; Kamal, M. S.; Patil, S. A review on surfactant retention on rocks: mechanisms, measurements, and influencing factors. *Fuel* **2021**, *293*, No. 120459.
- (12) Budhathoki, M.; Barnee, S. H. R.; Shiau, B.-J.; Harwell, J. H. Improved oil recovery by reducing surfactant adsorption with polyelectrolyte in high saline brine. *Colloids Surf., A* **2016**, *498*, 66–73.
- (13) (a) Guo, H.; Li, Y.; Wang, F.; Gu, Y. Comparison of Strong-Alkali and Weak-Alkali ASP-Flooding Field Tests in Daqing Oil Field. *SPE Prod. Oper.* **2018**, *33*, 353–362. (accessed 1/3/2022) (b) Shamsijazeyi, H.; Verduzco, R.; Hirasaki, G. J. Reducing adsorption of anionic surfactant for enhanced oil recovery: Part II. Applied aspects. *Colloids Surf., A* **2014**, *453*, 168–175. (c) Sheng, J. J. A comprehensive review of alkaline-surfactant-polymer (ASP) flooding. *Asia-Pac. J. Chem. Eng.* **2014**, *9*, 471–489 Review.. Scopus. (d) Zhang, D.; Liu, S.; Yan, W.; Puerto, M.; Hirasaki, G. J.; Miller, C. A. Favorable Attributes of Alkali-Surfactant-Polymer Flooding. In *SPE/DOE Symposium on Improved Oil Recovery*, 2006 DOI: 10.2118/99744-ms.
- (14) (a) Belhaj, A. F.; Elraies, K. A.; Mahmood, S. M.; Zulkifli, N. N.; Akbari, S.; Hussien, O. S. The effect of surfactant concentration, salinity, temperature, and pH on surfactant adsorption for chemical enhanced oil recovery: A review. *J. Pet. Explor. Prod. Technol.* **2020**, *10*, 125–137. (b) Pal, S.; Mushtaq, M.; Banat, F.; Al Sumaiti, A. M. Review of surfactant-assisted chemical enhanced oil recovery for carbonate reservoirs: challenges and future perspectives. *Pet. Sci.* **2018**, *15*, 77–102. (c) Southwick, J. G.; van den Pol, E.; van Rijn, C. H.; van Batenburg, D. W.; Boersma, D.; Svec, Y.; Mastan, A. A.; Shahin, G.; Raney, K. Ammonia as Alkali for Alkaline/Surfactant/Polymer Floods. *SPE J.* **2016**, *21*, 10–21. (accessed 1/3/2022).
- (15) Dai, C.; Zhao, F.; Xiao, J. Studies on the reutilization techniques of the residual polymer in formation after polymer flooding. *XIAN SHIYOU DAXUE XUEBAO ZIRAN KEXUE BAN* **2006**, *21*, 56.
- (16) Tavakkoli, O.; Kamyab, H.; Shariati, M.; Mustafa Mohamed, A.; Junin, R. Effect of nanoparticles on the performance of polymer/surfactant flooding for enhanced oil recovery: A review. *Fuel* **2022**, *312*, No. 122867.
- (17) Lashari, N.; Ganat, T.; Elraies, K. A.; Ayoub, M. A.; Kalam, S.; Chandio, T. A.; Qureshi, S.; Sharma, T. Impact of nanoparticles stability on rheology, interfacial tension, and wettability in chemical enhanced oil recovery: A critical parametric review. *J. Pet. Sci. Eng.* **2022**, *212*, No. 110199.
- (18) Rezaei, A.; Riazi, M.; Escrochi, M.; Elhaei, R. Integrating surfactant, alkali and nano-fluid flooding for enhanced oil recovery: A mechanistic experimental study of novel chemical combinations. *J. Mol. Liq.* **2020**, *308*, No. 113106.
- (19) Mohajeri, M.; Hemmati, M.; Shekarabi, A. S. An experimental study on using a nanosurfactant in an EOR process of heavy oil in a fractured micromodel. *J. Pet. Sci. Eng.* **2015**, *126*, 162–173.
- (20) Wu, Y.; Chen, W.; Dai, C.; Huang, Y.; Li, H.; Zhao, M.; He, L.; Jiao, B. Reducing surfactant adsorption on rock by silica nanoparticles for enhanced oil recovery. *J. Pet. Sci. Eng.* **2017**, *153*, 283–287.
- (21) Zargartalebi, M.; Kharrat, R.; Barati, N. Enhancement of surfactant flooding performance by the use of silica nanoparticles. *Fuel* **2015**, *143*, 21–27.
- (22) Zhong, X.; Li, C.; Pu, H.; Zhou, Y.; Zhao, J. X. Increased Nonionic Surfactant Efficiency in Oil Recovery by Integrating with Hydrophilic Silica Nanoparticle. *Energy Fuels* **2019**, *33*, 8522–8529.
- (23) Gbadamosi, A. O.; Junin, R.; Manan, M. A.; Agi, A.; Oseh, J. O.; Usman, J. Synergistic application of aluminium oxide nanoparticles and oilfield polyacrylamide for enhanced oil recovery. *J. Pet. Sci. Eng.* **2019**, *182*, No. 106345.
- (24) Bashir Abdullahi, M.; Rajaei, K.; Junin, R.; Bayat, A. E. Appraising the impact of metal-oxide nanoparticles on rheological properties of HPAM in different electrolyte solutions for enhanced oil recovery. *J. Pet. Sci. Eng.* **2019**, *172*, 1057–1068.
- (25) Atkin, R.; Craig, V. S. J.; Wanless, E. J.; Biggs, S. Mechanism of cationic surfactant adsorption at the solid–aqueous interface. *Adv. Colloid Interface Sci.* **2003**, *103*, 219–304.
- (26) Ahmadi, M. A.; Sheng, J. Performance improvement of ionic surfactant flooding in carbonate rock samples by use of nanoparticles. *Pet. Sci.* **2016**, *13*, 725–736.
- (27) Saxena, N.; Kumar, A.; Mandal, A. Adsorption analysis of natural anionic surfactant for enhanced oil recovery: The role of mineralogy, salinity, alkalinity and nanoparticles. *J. Pet. Sci. Eng.* **2019**, *173*, 1264–1283.
- (28) Liu, Z.; Zhao, G.; Brewer, M.; Lv, Q.; Sudhölter, E. J. R. Comprehensive review on surfactant adsorption on mineral surfaces in chemical enhanced oil recovery. *Adv. Colloid Interface Sci.* **2021**, *294*, No. 102467.
- (29) Ali, J. A.; Kolo, K.; Manshad, A. K.; Stephen, K. D. Potential application of low-salinity polymeric-nanofluid in carbonate oil reservoirs: IFT reduction, wettability alteration, rheology and emulsification characteristics. *J. Mol. Liq.* **2019**, *284*, 735–747.
- (30) Sharma, T.; Sangwai, J. S. Silica nanofluids in polyacrylamide with and without surfactant: Viscosity, surface tension, and interfacial tension with liquid paraffin. *J. Pet. Sci. Eng.* **2017**, *152*, 575–585.
- (31) Ahmadi, M.; Chen, Z. Challenges and future of chemical assisted heavy oil recovery processes. *Adv. Colloid Interface Sci.* **2020**, *275*, No. 102081.
- (32) (a) Amiranshoja, T.; Junin, R.; Kamal Idris, A.; Rahmani, O. A comparative study of surfactant adsorption by clay minerals. *J. Pet. Sci. Eng.* **2013**, *101*, 21–27. (b) Liu, Q.; Dong, M.; Zhou, W.; Ayub, M.; Zhang, Y. P.; Huang, S. Improved oil recovery by adsorption–desorption in chemical flooding. *J. Pet. Sci. Eng.* **2004**, *43*, 75–86.
- (33) Zhang, R.; Somasundaran, P. Advances in adsorption of surfactants and their mixtures at solid/solution interfaces. *Adv. Colloid Interface Sci.* **2006**, *123–126*, 213–229.
- (34) Ahmadi, M. A.; Shadizadeh, S. R. Induced effect of adding nano silica on adsorption of a natural surfactant onto sandstone rock: Experimental and theoretical study. *J. Pet. Sci. Eng.* **2013**, *112*, 239–247.