

Contents lists available at ScienceDirect

MethodsX





Method Article

Radionuclides proportion and radiological risk assessment of soil samples collected in Covenant University, Ota, Ogun State Nigeria



O.O. Adewoyin^{a,*}, M. Omeje^a, E.S. Joel^a, S.A. Akinwumi^a, C.O. Ehi-Eromoseled^b, Zaidi Embong^c

ABSTRACT

The activity levels of 238 U, 232 Th and 40 K in soil surrounding major office complexes in Covenant University were analyzed for radiological hazards to determine the safety of the residents in such environment. Sixteen (16) soil samples were collected, prepared and sent to Acme laboratory in Canada for analysis with the use of high purity germanium detector. The mean activity concentrations of 238 U, 232 Th and 40 K were found to be 45 ± 10 , 135 ± 8 and 195 ± 20 respectively. The concentrations of 238 U and 232 Th were found to be higher than the world recommended standard of 35 and 30, while the result for 40 K was noted to be lower than the world safe limit. The average values of Raeq, D, AED, I_{yr} , H_{ex} and ELCR in this study were estimated to be 252.33 Bq/kg, 110.15 nGy/h, 0.13 mSv/y, 1.78, 0.68 and 0.47×10^{-3} respectively. It was noticed that none of the measured parameters was higher than the internationally recommended safe limits. 232 Th was found to be the major contributor to the environmental radionuclides in the area of study. Therefore, the inhabitants of the office complexes whose environment was assessed are considered not be exposed to any radiological hazards.

© 2018 The Author(s). Published by Elsevier B.V. This is an open access article under the CC BY license (http://creativecommons.org/licenses/by/4.0/).

ARTICLE INFO

Keywords: Covenant University, Gamma-ray, Activity concentrations, Radiological hazards

Article history: Received 23 August 2018; Accepted 24 October 2018; Available online 29 October 2018

^a Department of Physics, Covenant University, Ota, Ogun State, Nigeria

^b Department of Chemistry, Covenant University, Ota, Ogun State, Nigeria

^c Department of Physics, Universiti Tun Hussein Onn Malaysia

^{*} Corresponding author.

E-mail addresses: segadot@yahoo.com, olusegun.adewoyin@covenantuniversity.edu.ng (O.O. Adewoyin).

Introduction

Living things are consistently and continuously exposed to background ionizing radiation, whose origin could be both natural and man-made [1]. Natural radionuclides spread widely in soils, sediments and rocks. Natural background radiation is determined by the activity of the radionuclide content in soil [2,3]. Although, geologic features as well as the activities of man can trigger the level of radioactivity in soil [4,5]. For instance, rocks that are rich in granite, phosphate and salt are often rich in natural radionuclides, which find their ways into the soils in the environment by weathering and other mechanical transportation processes. Similarly, human activities such as industrialization, agricultural practices, mining, building materials and so on can influence the radioactivity level in soil.

Previous studies have shown that man is exposed to natural background radiation in the region of 2.4 mSv, which accounts for about 80 percent of the annual radiation dose exposure per person per annum [6,7]. That being said, building is an essential part of man's life in the modern world because man lives, works, schools and does his activities in one building or another [30]. Thus, adequate knowledge of the natural radioactivity in soil will assist in evaluating the degree of radiation exposure to the population and it will also help in determining the appropriate locations to site residential and office structures.

The radiological consequences of undue exposure to these radionuclides to man can lead to major hazard effect such as the irradiation of the lung tissue and cancer [8]. In order to avoid these kinds of disease, it is essential to assess the natural environmental radioactivity and its associated gamma radiation so as to ascertain the safety of the residents of the geographical location. Dizman et al. [3] established the possibility of the annual effective gamma doses and life time cancer risks being higher than the world's recommended average, while investigating the background radiation level in soil in order to estimate the associated health risks. Korkmaz et al. [7] observed that adequate information on the distribution of radionuclide in the environment is very expedient for radiation measurement and protection [9,10]. Furthermore, Kumari et al. [8] is of the opinion that the effects of radiation exposure to man can be estimated by evaluating the levels of radioactive pollutants that is emitted to the environment [28,29].

It is on this note that this study was conducted using High Purity Germanium detector to determine the concentration of naturally occurring radionuclides and other radiological parameters as well as assessing the contribution of each radionuclide to these radiological parameters, in the soil samples collected in the areas surrounding Covenant University Centre for Research Innovation and Development (CUCRID), Senate building, Sports Complex and Café 1 all in Covenant University, Ota, Ogun State, in order to evaluate the health risk, the population of about 10,000 people that have their activities within this area on a daily basis are exposed to.

Study area

The study was conducted in Covenant University around the CUCRID building, Senate building, Sports Complex and Café area. The area of study is located within latitude 6° 40′ 26.17″ to 6° 40′19.38″ N and longitude 3° 09′ 37.09″ to 3° 09′ 44.57″ E of the Dahomey basin. The geology of this area has been largely discussed by many authors in which the stratigraphy has been grouped into six lithostratigraphic formations namely from the ancient to the youngest as Abeokuta, Ewekoro, Akinbo, Oshosun, Ilaro and Benin formations. Abeokuta formations is composed of Ise, Afowo and Araromi formations (Fig. 1).

Materials and methods

Sample collection and preparation

Soil samples were collected around CUCRID building, Senate Building, Sports Complex and Café 1 building (Fig. 2). Four samples were collected at every sampling location at a depth of about 0-15 cm in the listed areas. A square area (1 m x 1 m) was measured and sample was collected in each of the diagonals and 16 m was the interval between each sampling location. Sixteen (16) samples were

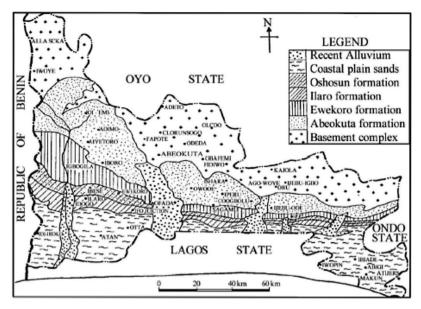


Fig. 1. Geological map of the study area [4].

collected around the region considered for this study and packaged in plastic bags. Initial labelling of the samples was done for easy identification and separation. All samples were transported to the Covenant University Chemistry Research Laboratory, where each sample was oven dried at a temperature of $105-110\,^{\circ}$ C. The dried samples were crushed using mortar and pestle to produce fine particle size and the particle was sieved using 75 μ m mesh size in order to remove dried leaves and stone pebbles. Finally, 60 gm was measured out of each sample using a weigh balance and poured in plastic bags that are labelled according to their original container. The prepared samples were packaged and sent to Activation Laboratories Limited in Canada for analysis.

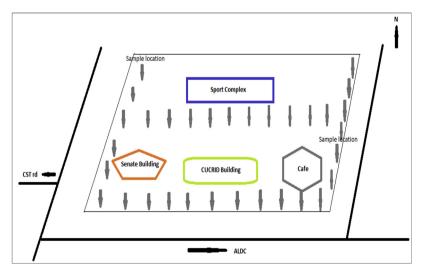


Fig. 2. Base map of the study area and sample locations.

Analysis of the sample

The samples were weighed in 2 Oz seamless tin canisters (216" diameter x 138" height) and sealed with an electrical tape for four weeks to achieve secular equilibrium between parent's uranium and thorium with their daughter radionuclides. The high-resolution Gamma spectroscopy spectrums are acquired after 10000 s count. The ²²⁶Ra (²³⁸U) and ²³²Th are determined from their progenies (²¹⁴Pb & ²¹⁴Bi for ²²⁶Ra and ²¹²Pb & ²²⁸Ac for ²³²Th) [11,12].

Quality assurance and calibration standards

The Gamma spectrometry system is calibrated with Certified Reference Standards by CANMET (DL-1a, BL-4a, BL-5, DH-1a and UTS-2), USGS (STM-2), IAEA – 372 and IAEA – 447. QA includes blank, duplicate and control standards (DL-1a and UTS-2) in every batch of 20 samples. The counting geometry is identical for all samples and standards [13,14].

Estimation of radiological parameters

These parameters were estimated in order to assess the level of exposure of the residents of the study area to background ionizing radiation.

The activity concentrations of 238 U (226 Ra), 232 Th and 40 K were measured in each of the soil samples.

Radium equivalent activity is a popularly assessed hazard index and it is evaluated with the use of the proposed by Beretka and Mathew [15] in Eq. (1). In this relation, it is assumed that 370 Bq/kg of 226 Ra, 259 Bq/kg of 232 Th and 4810 Bq/kg of 40 K produce the same gamma dose rate

$$Ra_{eq} = A_{Ra} + 1.43A_{Th} + 0.077A_K \tag{1}$$

Where A_{Ra} , A_{Th} and A_{K} are the activity concentrations of ²²⁶Ra, ²³²Th and ⁴⁰K in Bq/kg, respectively [16,17].

Another characteristic of the external terrestrial gamma radiation, the absorbed dose rate (D) in air at 1 m above the ground surface owing to the concentration of radionuclides was calculated by Eq. (2) according to OECD [18] and UNSCEAR [19].

$$D(nGy/h) = 0.462C_U + 0.604C_{Th} + 0.0417C_K$$
(2)

Where C_U , C_{Th} and C_K are the activity concentrations in Bq/kg of ²³⁸U, ²³²Th and ⁴⁰K in soil samples, respectively. 0.462, 0.604 and 0.0417 are the conversion factors for uranium, thorium and potassium, respectively in the samples.

To estimate the annual effective dose, consideration must be given to the conversion coefficient from absorbed dose in air to effective dose and the outdoor occupancy factor. The annual estimated average effective dose equivalent received by a member is calculated using a conversion factor of 0.7 Sv/Gy, which is used to convert the absorbed dose rate to annual effective dose with an outdoor occupancy of 20% [20,21].

The annual effective dose was determined using Eq. (3)

AED = D
$$(nGy/h) \times 8760 h \times 0.2 \times 0.7 \text{ SvG/y} \times 10^{-6}$$
 (3)

Where D is the absorbed dose rate in air (nGy/h), 0.7 is the dose conversion factor, 0.2 is the outdoor occupancy factor while 8760 h/y is the time [22–24].

One other radiation hazard index is called the representative level index, $l\gamma r$, and it is defined by Eq. (4) as

$$I_{yr} = \frac{1}{150Bq/kg} A_{Ra} + \frac{1}{100Bq/kg} A_{Th} + \frac{1}{1500Bq/kg} A_{K}$$
 (4)

Where ARa, ATh, and AK have the same meaning as in Eq. (1).

The external hazard index, Hex was calculated for the investigated samples using the model proposed by Raghu et al. [25] and Joel et al. [12] where the external hazard index is given by Eq. (5)

$$H_{ex} = \frac{A_{Ra}}{370} + \frac{A_{Th}}{259} + \frac{A_K}{4810} \le 1 \tag{5}$$

Excess life time cancer risk (ELCR) was calculated using Eq. (6)

$$ELCR = AEDE \times DL \times RF$$
 (6)

Where DL is the duration of life (70 years) and RF is risk factor (S/v). For stochastic effects, ICRP 90 uses values of 0.05 for the public [5,26].

Results and discussion

The results of the measured activity concentrations from the soil samples collected from sixteen (16) locations are presented in Table 1. It could be observed that the activity concentration of ²³⁸U (226 Ra) ranged between (32 ± 8) and (78 ± 14) Bq/kg. The minimum value was noticed in Senate 6 while the maximum value was observed in Sport 17. Similarly, from the activity concentrations of the soil samples, it was noted from the result that 232 Th varied from (78 ± 6) in Sport 22 to (483 ± 14) Bq/ kg in Sport 17. Furthermore, the concentrations of measured in the samples for 40K was between senate 2 and Sport 17 with values ranging between (66 ± 10) and (923 ± 39) Bq/kg respectively. The activity concentration of ⁴⁰K was noticed to be higher than ²³⁸U and ²³²Th in all the measured samples. The estimated average values for 238 U, 232 Th and 40 K are (45 ± 10) , (135 ± 8) and (145 ± 20) Bq/kg respectively. In addition, the average activity concentrations for ²³⁸U and ²³²Th in the present study. were found to be higher than the world recommended standard of 35 and 30 Bq/kg, while it is lower in ⁴⁰K than the world standard of 400 Bq/kg as reported by UNSCEAR [19]. The result of the activity concentrations of ²³⁸ U and ²³²Th in the present study are higher than the result obtained in Dizman et al. [3] and Usikalu et al. (2017), while the activity level of ⁴⁰K, in the current research, is far lower than the result of the previous study. Furthermore, the activity concentration of 238U in Amanjeet et al. [27] corresponds with the activity levels of ²³⁸U in the present study while the concentration levels of ²³²Th and ⁴⁰K in the previous study were far higher than the present study. The variations observed in the results of the present study could be as a result of the differences in the local geology and mineralogical composition of the study area when compared to other regional geology.

Table 1 Radioactivity Concentrations of 238 U, 232 Th and 40 K in the Soil samples.

| s/n | Sample Identity | ²³⁸ U | ²³² Th | ⁴⁰ K |
|-----|-----------------|------------------|-------------------|-----------------|
| | | (Bq/kg) | (Bq/kg) | (Bq/kg) |
| 1 | CUCRID 7 | 40 ± 10 | 127 ± 9 | 131 ± 18 |
| 2 | CUCRID 8 | 46 ± 10 | 144 ± 9 | 197 ± 21 |
| 3 | CUCRID 13 | 41 ± 9 | 123 ± 8 | 145 ± 19 |
| 4 | CUCRID 27 | 49 ± 10 | 119 ± 9 | 142 ± 21 |
| 5 | SENATE 2 | 47 ± 10 | 112 ± 9 | 66 ± 10 |
| 6 | SENATE 5 | 35 ± 9 | 82 ± 6 | 175 ± 17 |
| 7 | SENATE 6 | 32 ± 8 | 97 ± 6 | 144 ± 15 |
| 8 | SENATE 4 | 47 ± 10 | 88 ± 6 | 102 ± 17 |
| 9 | SPORT 17 | 78 ± 14 | 483 ± 14 | 923 ± 39 |
| 10 | SPORT 8 | 47 ± 10 | 110 ± 8 | 154 ± 19 |
| 11 | SPORT 22 | 35 ± 8 | 78 ± 6 | 130 ± 16 |
| 12 | SPORT 12 | 37 ± 10 | 156 ± 9 | 254 ± 24 |
| 13 | CAFÉ 4 | 48 ± 9 | 118 ± 8 | 127 ± 20 |
| 14 | CAFÉ 3 | 46 ± 11 | 119 ± 9 | 167 ± 21 |
| 15 | CAFÉ 6 | 42 ± 10 | 85 ± 6 | 132 ± 17 |
| 16 | CAFÉ 9 | 50 ± 10 | 111 ± 8 | 127 ± 20 |
| | mean | 45 ± 10 | 135 ± 8 | 195 ± 20 |

 Table 2

 Radiological Parameters considered in the Present Study.

| s/n | Sample ID | Ra _{eq} (Bq/kg) | D (nGy/h) | AED (mSv/y) | Iyr | Hex | ELCR (x 10 ⁻³) |
|---------|-----------|-----------------------------|--------------|----------------|------|------|-------------------------------|
| 1 | CUCRID 7 | 231.7 | 100.65 | 0.12 | 1.63 | 0.63 | 0.42 |
| 2 | CUCRID 8 | 267.09 | 116.44 | 0.14 | 1.88 | 0.72 | 0.49 |
| 3 | CUCRID 13 | 228.06 | 99.28 | 0.12 | 1.60 | 0.61 | 0.42 |
| 4 | CUCRID 27 | 230.1 | 100.44 | 0.12 | 1.62 | 0.62 | 0.42 |
| 5 | SENATE 2 | 212.24 | 92.11 | 0.11 | 1.47 | 0.57 | 0.39 |
| 6 | SENATE 5 | 165.74 | 73.0 | 0.09 | 1.17 | 0.45 | 0.32 |
| 7 | SENATE 6 | 181.8 | 79.37 | 0.10 | 1.28 | 0.49 | 0.35 |
| 8 | SENATE 4 | 180.69 | 79.11 | 0.10 | 1.26 | 0.49 | 0.35 |
| 9 | SPORT 17 | 839.76 | 366.26 | 0.45 | 5.97 | 2.26 | 1.60 |
| 10 | SPORT 8 | 216.16 | 94.57 | 0.12 | 1.51 | 0.58 | 0.42 |
| 11 | SPORT 22 | 156.55 | 68.7 | 0.08 | 1.10 | 0.42 | 0.28 |
| 12 | SPORT 12 | 279.64 | 121.9 | 0.15 | 1.98 | 0.75 | 0.53 |
| 13 | CAFÉ 4 | 226.52 | 98.75 | 0.12 | 1.59 | 0.62 | 0.42 |
| 14 | CAFÉ 3 | 229.03 | 100.09 | 0.12 | 1.61 | 0.61 | 0.42 |
| 15 | CAFÉ 6 | 173.71 | 76.24 | 0.09 | 1.22 | 0.47 | 0.32 |
| 16 | CAFÉ 9 | 218.51 | 95.44 | 0.12 | 1.53 | 0.60 | 0.42 |
| Average | | 252.33 | 110.15 | 0.13 | 1.78 | 0.68 | 0.47 |

The results of the radium equivalent activity Ra_{eq} in the present study ranged between 156.55 at Sport 22 and 839.76 Bq/kg at Sport 17 with a mean value of 252.33 Bq/kg. This result is below the permissible limit of 370 Bq/kg recommended by OECD [18]. The absorbed dose rate in the soil samples in the area of study varied from 68.7 nGy/h (Sport 22) to 366.26 nGy/h (Sport 17) with an average value of 110.15 nGy/h. The air absorbed dose was noticed to be higher than population weighted average value of 59 nGy/h for primordial radiation [19]. The annual effective dose was estimated to quantify the radiological risk of radionuclides in soil to the inhabitants and the results are presented in Table 2. The annual effective dose (AED) ranged between 0.08 and 0.45 mSv/y with a mean value of 0.13 mSv/y. The minimum value of AED was noticed at Sport 22, while the maximum result was obtained at Sport 17. The average value of the AED was observed to be higher than the world recommended safe limit of 0.07 mSv/y by an approximate factor of 2. The result of AED in the present study agreed with Zhang [1], while it is much lower than what was obtained in Amanjeet et al. [27].

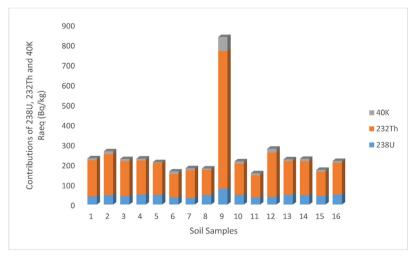


Fig. 3. The contributions of 238 U, 232 Th and 40 K to Raeq in each Sample.

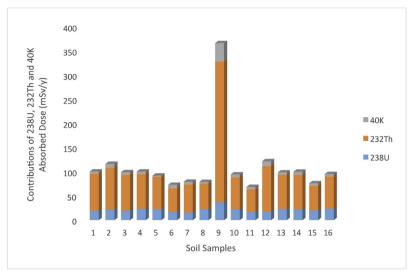


Fig. 4. The contributions of ²³⁸U, ²³²Th and ⁴⁰K to D (mSv/y) in each Sample.

In addition, the result of the representative level index I_{VD} varied from 1.10 (Sport 22) to 5.97 (Sport 17), with a mean value of 1.78. The obtain result agreed with Dizman et al. [3] but lower than the result in Kumari et al. [8]. The results of I_{vr} in the present study correlated with the recommended standard of $I_{vr} \le$ 2 as a result, the soil samples could be said not to pose any significant risk to the inhabitants of the area of study. The results of the external hazard index (Hex) ranged between 0.42 and 2.26 with a mean value of 0.68. Although, the value of Hex at Sport 17 is far higher than the recommended standard of unity but a sample point in a collection of sample points may not be sufficient to expose residents to radiological hazard emanating from the environment. The result of H_{ex} in the present study agreed with Korkmaz et al. [7] but higher than the results of Amanjeet et al. [27]. The results of ELCR for the studied soil samples ranged between 0.28×10^{-3} and 1.60×10^{-3} with an average value of 0.47×10^{-3} . The mean result of ELCR do not exceed the recommended safe limit of 3.75×10^{-3} [5]. The result of ELCR in the present study is comparable to the result obtained at the Rize province in Turkey [3]. The variations noticed in the radiological parameters of the soil samples at different locations of the study area could be as a result of the variation in the mineralogical composition and the geological formation of the study area. It was also observed in all the estimated radiological parameters that ²³²Th had the highest contribution to the environmental radioactivity in all the sample locations (Figs. 3 and 4). The contributions of Thorium in all the radiological parameters varied between 70 and 85 percent.

Conclusion

High purity germanium detector was used to analyze soil samples around the major office complexes in Covenant University in order to determine effects of radiation from the environment on the inhabitant of the offices. The activity concentrations of 238 U and 232 Th were found to be higher than the world permissible level on the other hand, the activity concentration of 40 K was lower than the world standard. Furthermore, the radiological parameters estimated such as the Raeq, D, AED, I_{yr} , I_{ex} and ELCR were found to be within the recommended safe standards. Moreover, I_{ex} was observed to be the major contributor to the environmental radionuclides in the area of study. Thus, the occupants of the office spaces are not in any risk of exposure to any radiological risk from their immediate environment.

Acknowledgment

The authors wish to appreciate the management of Covenant University, Ota, Ogun State, Nigeria. The grant identification number is CUCRID/VC/17/02/02/06-FS.

References

- [1] X. Zhang, Radioactivity level of soil around a coal-fired thermal power plant of northwest China, Int. J. Radiat. Res. 15 (3) (2017) 321–324.
- [2] E.M. Lee, G. Menezes, E.C. Finch, Natural radioactivity in building materials in the Republic of Ireland, Health Phys. 84 (2004) 378–383.
- [3] S. Dizman, F.K. Gorur, R. Keser, Determination of radioactivity levels of soil samples and the excess of lifetime cancer risk in Rize province, Turkey, Int. J. Radiat. Res. 14 (3) (2016) 237–244.
- [4] M.R. Usikalu, P.P. Maleka, M. Malik, K.D. Oyeyemi, O.O. Adewoyin, Assessment of geogenic natural radionuclide contents of soil samples collected from Ogun State, Southwestern, Nigeria, Int. J. Radiat. Res. 13 (4) (2015) 355–361.
- [5] N. Yin, X. Lu, Y. Li, Radioactive analysis and radiological hazards of sand in Weifang, China, Int. J. Radiat. Res. 15 (2) (2017) 225–228.
- [6] Y. Orguin, N. Altinsoy, A.H. Gultekin, G. Karaham, N. Celebi, Natural radioactivity levels in granitic plutons and groundwaters in Southeast part of Eskisehir, Turkey, Appl. Radiat. Isot. 63 (2005) 267–275.
- [7] M.E. Korkmaz, O. Agar, E. Uzun, Assessment of natural radioactivity levels for Karadag Mountain, Turkey, Int. J. Radiat. Res. 15 (4) (2017) 399–406.
- [8] R. Kumari, K. Kant, M. Garg, Natural radioactivity in rock samples of Aravali hills in India, Int. J. Radiat. Res. 15 (4) (2017) 391–398.
- [9] International Atomic Energy Agency, IAEA, Construction and Use of Calibration Facilities for Radiometric Field Equipment. Technical Reports Series no.309, IAEA, Vienna, 1989.
- [10] Internal Commission on Radiological Protection, Annual Limits on Intake of Radionuclides by Workers Based on the Recommendations, Annals on the ICRP, ICRP Publication 67, Oxford Press, 1990.
- [11] C. Papastefanou, S. Stoulos, M. Manolopoulou, On the radioactivity of building materials, J. Radioanal. Nucl. Chem. 236 (2005) 367–372.
- [12] E.S. Joel, O. Maxwell, O.O. Adewoyin, et al., Assessment of natural radioactivity in various commercial tiles used for building purposes in Nigeria, MethodsX 5 (2018) 8–19.
- [13] S. Pavlidou, A. Koroneos, G. Christofides, Imported plutonic rocks used in Greece as building materials: mineralogy, petrology, geochemistry and physicomechanical properties, Mineral Wealth 135 (2005) 37–54 (in Greek with English abstract).
- [14] O. Maxwell, O.O. Adewoyin, E.S. Joel, et al., Radiation exposure to dwellers due to naturally occurring radionuclides found in selected commercial building materials sold in Nigeria, J. Radiat. Res. Appl. Sci. 11 (3) (2018) 225–231.
- [15] J. Beretka, P.J. Mathew, Natural radioactivity of Australian building materials, industrial waste sand by-products, Health Phys. 48 (1985) 87–95.
- [16] M. Sharaf, M. Mansy, A. El-Sayed, E. Abbas, Natural radioactiv-ity and radon exhalation rates in building materials used in Egypt, Radiat. Meas. 31 (1999) 491–495.
- [17] J. Guillen, J.J. Tejado, A. Baeza, J.A. Corbacho, J.G. Munoz, Assessment of radiological hazard of commercial granites from Extramadura (Spain), J. Environ. Radiat. 132 (2014) 81–88.
- [18] NEA-OECD, Nuclear Energy Agency. Exposure to Radiationfrom Natural Radioactivity in Building Materials. Report by NEAGroup of Experts, OECD, Paris, 1979.
- [19] UNSCEAR, United nation scientific committee on the effects of atomic radiation), Exposures From Natural Radiation Sources, Annex B, United Nations, New York, 2000.
- [20] L. Xinwei, Radioactive analysis of cement and its products collected from Shaanxi, China, Health Phys. 88 (1) (2005) 84–86.
- [21] R. Trevisi, S. Risica, M. D'Alessandro, D. Paradiso, C. Nuccetelli, Natural radioactivity in building materials in the European Union: a database and an estimate of radiological significance, J. Environ. Radioact. 105 (2012) 11–20.
- [22] M. Tufail, Nasim-Akhtar, Sabiha-Javied, Tehsin-Hamid, Naturalradioactivity hazards of building bricks fabricated from salinesoil of two districts of Pakistan, J. Radiat. Prot. Res. 27 (2007) 481–492.
- [23] S. Ghose, K.H. Asaduzzaman, N. Zaman, Radiological significance of marble used for construction of dwellings in Bangladesh, Radioprot 47 (1) (2012) 105–118.
- [24] M.A. Kobeissi, O. El-Samad, I. Rachidi, Health assessment of natural radioactivity and radon exhalation rate in granites used as building materials in Lebanon, Radiat. Prot. Dosim. 153 (2013) 342–351.
- [25] Y. Raghu, R. Ravisankar, A. Chandrasekaran, et al., Assessment of natural radioactivity and radiological hazards in building materials used in the Tiruvannamalai district Tamilnadu, India, using a statistical approach, J. Taibah Univ. Sci. 11 (2017) 523–533.
- [26] K.N. Yu, Z.J. Guan, M.J. Stokes, E.C.M. Young, The assessment of the natural radiation dose committed to the Hong Kong people, J. Environ. Radioact. 17 (1992) 31–48.
- [27] Amanjeet, A. Kumar, S. Kumar, et al., Assessment of natural radioactivity levels and associated dose rates in soil samples from historical city Panipat, India, J. Radiat. Res. Appl. Sci. 10 (2017) 283–288.
- [28] G.A. Swedjemark, Swedish limitation schemes to decrease radon daughters in indoor air, Health Phys. 51 (1986) 569–578.
- [29] S. Righi, L. Bruzzi, Natural radioactivity and radon exhalation in building materials used in Italian dwellings, J. Environ. Radioact. 88 (2006) 158–170.
- [30] O.O. Adewoyin, E.O. Joshua, I.I. Akinwumi, M. Omeje, E.S. Joel, Evaluation of geotechnical parameters using geophysical data, J. Eng. Tech. Sci. 49 (1) (2017) 95–113.