



Article

Kinetics and Adsorption Isotherms of Amine-Functionalized Magnesium Ferrite Produced Using Sol-Gel Method for Treatment of Heavy Metals in Wastewater

Muhammad Irfan ¹, Fareeda Zaheer ², Humaira Hussain ³, Muhammad Yasin Naz ^{2,*}, Shazia Shukrullah ^{2,*}, Stanislaw Legutko ⁴, Mater H. Mahnashi ⁵, Mabkhoot A. Alsaiari ⁶, Abdulnour Ali Jazem Ghanim ⁷, Saifur Rahman ¹, Omar Alshorman ¹, Fahad Salem Alkahtani ¹, Mohammad K. A. Khan ⁸, Izabela Kruszelnicka ⁹ and Dobrochna Ginter-Kramarczyk ⁹

- Electrical Engineering Department, College of Engineering, Najran University Saudi Arabia, Najran 11001, Saudi Arabia; miditta@nu.edu.sa (M.I.); srrahman@nu.edu.sa (S.R.); omar2007_ahu@yahoo.com (O.A.); fsalkhtani@nu.edu.sa (F.S.A.)
- Department of Physics, University of Agriculture, Faisalabad 38040, Pakistan; fareedazaheer580@gmail.com
- Department of Chemistry, University of Okara, Okara 56300, Pakistan; humaira0949@gmail.com
- Faculty of Mechanical Engineering, Poznan University of Technology, 60-965 Poznan, Poland; stanislaw.legutko@put.poznan.pl
- Department of Pharmaceutical Chemistry, College of Pharmacy, Najran University, Najran 11001, Saudi Arabia; matermaha@gmail.com
- ⁶ Empty Qaurter Research Unit, Chemistry Department, College of Science and Art at Sharurah, Najran University Saudi Arabia, Najran 61441, Saudi Arabia; mabkhoot.alsaiari@gmail.com
- Civil Engineering Department, College of Engineering, Najran University Saudi Arabia, Najran 61441, Saudi Arabia; aaghanim@nu.edu.sa
- Mechanical Engineering Department, College of Engineering, Najran University Saudi Arabia, Najran 61441, Saudi Arabia; mkkhan@nu.edu.sa
- Faculty of Environmental Engineering and Energy, Department of Water Supply and Bioeconomy, Poznan University of Technology, 60-965 Poznan, Poland; izabela.kruszelnicka@put.poznan.pl (I.K.); dobrochna.ginter-kramarczyk@put.poznan.pl (D.G.-K.)
- * Correspondence: yasin306@uaf.edu.pk (M.Y.N.); zshukrullah@gmail.com (S.S.)

Abstract: This study is focused on the kinetics and adsorption isotherms of amine-functionalized magnesium ferrite (MgFe₂O₄) for treating the heavy metals in wastewater. A sol-gel route was adopted to produce MgFe₂O₄ nanoparticles. The surfaces of the MgFe₂O₄ nanoparticles were functionalized using primary amine (ethanolamine). The surface morphology, phase formation, and functionality of the MgFe₂O₄ nano-adsorbents were studied using the SEM, UV-visible, FTIR, and TGA techniques. The characterized nanoparticles were tested on their ability to adsorb the Pb²⁺, Cu²⁺, and Zn²⁺ ions from the wastewater. The kinetic parameters and adsorption isotherms for the adsorption of the metal ions by the amine-functionalized MgFe₂O₄ were obtained using the pseudo-first-order, pseudo-second-order, Langmuir, and Freundlich models. The pseudo-second order and Langmuir models best described the adsorption kinetics and isotherms, implying strong chemisorption via the formation of coordinative bonds between the amine groups and metal ions. The Langmuir equation revealed the highest adsorption capacity of 0.7 mmol/g for the amine-functionalized MgFe₂O₄ nano-adsorbents. The adsorption capacity of the nanoadsorbent also changed with the calcination temperature. The MgFe₂O₄ sample, calcined at 500 °C, removed the most of the Pb²⁺ (73%), Cu²⁺ (59%), and Zn²⁺ (62%) ions from the water.

Keywords: manganese ferrite; amine functionalization; heavy metals; wastewater; adsorption isotherms

check for updates

Citation: Irfan, M.; Zaheer, F.; Hussain, H.; Naz, M.Y.; Shukrullah, S.; Legutko, S.; Mahnashi, M.H.; Alsaiari, M.A.; Ghanim, A.A.J.; Rahman, S.; et al. Kinetics and Adsorption Isotherms of Amine-Functionalized Magnesium Ferrite Produced Using Sol-Gel Method for Treatment of Heavy Metals in Wastewater. *Materials* 2022, 15, 4009. https://doi.org/10.3390/ ma15114009

Academic Editors: Andrey S. Mereshchenko and Carlos Javier Duran-Valle

Received: 29 April 2022 Accepted: 2 June 2022 Published: 5 June 2022

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2022 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (https://creativecommons.org/licenses/by/4.0/).

1. Introduction

Water contamination with heavy metals mainly occurs due to anthropogenic or natural processes. Since the production of metals from industrial activities is growing over time, the

Materials 2022, 15, 4009 2 of 28

issue of waste management is worsening; dedicated efforts are needed to find economical solutions [1]. The heavy metals in wastewater are treated through chemical coagulation, chemical precipitation, photocatalytic degradation, flocculation, electrochemical routes, ion exchange, adsorption, membrane filtration, and bioremediation [2–5]. Most accessible technologies, on the other hand, may have technical and economic limitations, i.e., high capital and operating costs, sensitivity to operational conditions, large energy use, or sludge formation. Taking these considerations into account, adsorption is considered an economical and effective approach to eliminating heavy metal ions from water [6–8]. Surface atoms govern the adsorption of heavy metals by an adsorbent. The adsorbent surface becomes unstable and active as the number of surface atoms rises and, therefore, produces many unsaturated bonds [9].

Conventional adsorbents provide a limited number of active sites, a small surface area, and complex adsorption kinetics and post-adsorption separation mechanisms. The difficulty of separating the adsorbents from the treated solution limits their use in wastewater treatment technology [10]. On the other hand, magnetic nanoparticles become supermagnetic under 25 nm. These materials offer a large active surface area and can be separated from the water by subjection to an external magnetic field. However, magnetic adsorbents may undergo surface poisoning and a reduction in magnetic field strength due to the dissolution of the magnetic core in acidic environments and the agglomeration of magnetic adsorbent particles. This issue can be addressed by modifying the adsorbent surface and preventing the dissolution of the magnetic core in the solution. In many cases, modified surfaces negatively affect the activity of the adsorbent nanoparticles. To develop good synergy between the physiochemical characteristics of the adsorbent and the adsorption capacity, the modification approaches should be researched further to improve understanding the mechanism involved. This discussion suggests that surface modification is critical for increasing selectivity and removal efficiency [11].

The level of surface modification also depends on the pre-functionalization and calcination of the magnetic adsorbent nanoparticles. The effect of calcination temperature on the surface functionalization of magnetic adsorbent nanoparticles and MgFe₂O₄ nanoparticles, in particular, is not reported in the published literature. Herein, the role of the calcination temperature in the amine functionalization of MgFe₂O₄ nanoparticles in the context of the adsorption of heavy metals is assessed. An increase in calcination temperature may influence the particle size and exothermic oxidation of the adsorbent particles and, consequently, their level of functionalization. The density of the adsorbent nanoclusters may also change on heating due to oxidation, the recrystallization of the clusters, and the dissolution of impure products. The oxidation and crystal reformation govern the inter-grain spacing, surface activation, and surface porosity of the adsorbent particles. The sol-gel technique produces more remarkable results when developing ultrafine particles at reasonably low temperatures than the other available methods [12]. It is applied due to its unmatchable benefits, such as its short rate of reaction, energy efficiency, nano-sized powders, ease of operation, and limited aggregation of particles [13]. In the reported work, MgFe₂O₄ was produced using the sol-gel method and functionalized by utilizing ethanolamine as a surface modifier. This study aimed to investigate the characteristics of the absorption of heavy metals from wastewater by magnesium ferrite nanoparticles.

2. Materials and Methods

2.1. Synthesis of Ferrite Nanoparticles

The analytical-grade reagents used in this work were procured from Sigma-Aldrich. These reagents were used as supplied without any processing or additional treatment. First of all, 1.6 g of iron(III) nitrate nonahydrate and 0.5 g of magnesium nitrate hexahydrate [Mg(NO₃)₂.6H₂O] were added to 40 mL of DI water. Next, 1.8 g of citric acid monohydrate [C₆H₈O₇.H₂O] was added to 40 mL of DI water and added into the initial aqueous solution. The solution was then stirred continuously at 60 °C. The solution pH was adjusted to 7 by dropwise addition of sodium hydroxide (NaOH) to the mixture. The mixture converted

Materials 2022, 15, 4009 3 of 28

into sol on heating, which changed to gel after stirring for 3 h. The obtained gel was dried in an oven at 90 $^{\circ}$ C for 7 h. Subsequently, the dry gel was calcined in a furnace at 500 $^{\circ}$ C, 600 $^{\circ}$ C, and 700 $^{\circ}$ C, labeled as samples A, B, and C. After calcination, the samples were ground into a fine powder. The ferrite powder was characterized and tested for adsorption of heavy metals.

2.2. Characterization Techniques

FTIR, SEM, TGA, and UV-vis techniques were used to analyze the pristine and amine-functionalized adsorbents. An Agilent Cary-630 spectrometer was employed to produce FTIR spectra of the adsorbents in the range of 4000–500 cm⁻¹. A scanning electron microscope (Nano-SEM 450) was used to produce SEM micrographs for evaluating the surface morphology of the adsorbents. A SEM microscope, featuring a STEM detector with a standard TEM grid, was used for transmission electron microscopy analysis. STEM analysis was used to determine particle size and morphology in support of SEM analysis. A TGA/DSC instrument was operated to get thermogravimetry profiles of pristine and functionalized adsorbents for the analysis of the amount of amine coating during the functionalization of the adsorbent.

2.3. Amine Functionalization of Ferrite Nanoparticles

The ethanolamine was used as a surface modifier for the functionalization of MgFe $_2$ O $_4$ nanoparticles. About 1.5 g of MgFe $_2$ O $_4$ and 2 mL ethanolamine were added to 20 mL of distilled water. After 30 min of stirring and heating, the aqueous liquid was cooled to room temperature. To wash the precipitates and maintain a pH of 7, deionized water was used. The washed sample was dried in an oven for 2 h. All samples were aminefunctionalized using the same procedure. The functionalization procedure was completed by following the catalyst-free method reported by Gu et al. [14] and Nonkumwong et al. [15] in different studies.

2.4. Adsorption of Heavy Metals

Precisely 0.02 g of lead nitrate, 0.02 g of copper chloride dehydrate, and 0.02 g of zinc acetate dehydrate were added to deionized water (50 mL) to simulate wastewater. The adsorption experiments were conducted by dissolving 0.25 g of MgFe₂O₄-NH₂ adsorbent in the prepared wastewater. The pH of the aqueous mixture was maintained at 7. This aqueous mixture was stirred for 90 min and supernatants were filtered. The residual metal content in supernatants was measured using atomic absorption spectroscopy of the samples. The agitation period and initial concentrations of the heavy metals might be varied to have a good understanding of the adsorption response of the magnetic nano-adsorbent. The kinetic parameters and adsorption isotherms for the selected heavy metals onto the amine-functionalized MgFe₂O₄ were calculated using different chemical models [16].


3. Results and Discussion

3.1. Metal Ion Adsorption Mechanism

Tetraethyl orthosilicate (TEOS) silane was used for the direct silanization of the surface of the magnetic adsorbent. On the surface, the silica produces a highly robust covalent coating with grafted functional groups. It enables the additional functionalization of the core functional groups, resulting in a wide range of surface functionalities for adsorption applications [17]. The silica coating also prevents the agglomeration of the adsorbent particles. The silica-coated adsorbent was amino-functionalized using ethanolamine. A reaction scheme involving the amine functionalization of the MgFe₂O₄ adsorbent for the adsorption of the heavy metal ions is presented as Scheme 1. The mechanism of metal ions' adsorption onto the adsorbent heavily depends on functional groups, which give binding affinity to the metal ions. The deposition of pollutants on the MgFe₂O₄-NH₂ adsorbent in a multicomponent solution may occur through a physical process or the formation of

Materials 2022, 15, 4009 4 of 28

chemical bonds. The $-NH_2$ groups on the functionalized MgFe₂O₄ nanoparticles can be protonated and deprotonated, depending on the acidic and basic environment.

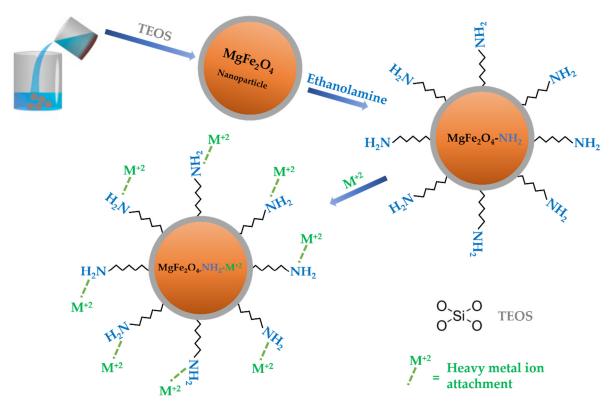

Scheme 1. Illustration of amine-functionalization and metal ions adsorption onto MgFe₂O₄-NH₂ adsorbent.

Since $-NH_2$ groups possess a hard basic nature, they can bind strongly with heavy metal cations. As shown by the processes below, the ions in the aqueous solution can be in the form of hydrolysis or solvation species:

$$\begin{split} M^{2+} + nH_2 &\leftrightarrow M(H_2O)_n^{2+} \\ M(H_2O)_n^{2+} &\leftrightarrow M(H_2O)^{n-1} + H^+ \\ nM^{2+} + mH_2O &\leftrightarrow M_n(OH)_m^{2n-m} + mH^+ \end{split}$$

The mass transfer may occur due to pore filling, ion exchange, hydrophobic interaction, and H-bonding. The adsorption by the MgFe₂O₄-NH₂ adsorbent increases as the number of surface atoms increases, making them more active and unstable, as well as providing more unsaturated bonds. The M^{2+} ions dominate when the solution pH is below 5, while M(OH)⁺ tends to initiate when the solution pH is greater than 5. The M(OH)₂ is present when the solution pH exceeds 6.5. Since the solution pH was maintained at 7 in this study, the formation of the M(OH)₂ was anticipated. The rapid adsorption of the M^{2+} ions onto MgFe₂O₄-NH₂ reveals that chemical adsorption dominates the physical adsorption, most likely due to the complexation of the -NH₂ groups and M^{2+} ions. The pseudo-second order described the adsorption of the heavy metal ions onto the adsorbent surface due to the formation of chemical bonding between the polar functional groups and the metal ions. The chemical bonding resulted in an adsorbent with a high capacity for cation exchange. The findings suggested that the adsorption of heavy metal ions onto MgFe₂O₄-NH₂ adsorbent is driven by the formation of coordinate bonds or chemisorption.

Materials **2022**, 15, 4009 5 of 28

3.2. FTIR and TGA Analysis of Amine-Functionalized Adsorbent

The attachment of the amine groups onto the MgFe₂O₄ adsorbent was characterized by the production of the FTIR spectra of the pristine and amine-treated adsorbents. Figure 1a reports the FTIR profiles of the pristine adsorbents calcined at 500 °C, 600 °C, and 700 °C. The FTIR spectra did not vary significantly with the change in calcination temperature. Three curves at 500 °C, 600 °C, and 700 °C show the same number of peaks. However, the intensity of the characteristic absorption peaks of the M-O band slightly increased with the calcination temperature. The formation of the spinel structure of the MgFe₂O₄ adsorbent with cation and anion distribution on the octahedral and tetrahedral lattice sites was confirmed by the FTIR analysis. Two absorption bands were noticed in the spinel structure of the MgFe₂O₄ adsorbent, at 570 cm⁻¹ and 450 cm⁻¹. The high-frequency band revealed the M-O bond stretching vibration at the tetrahedral sites (A), while the low-frequency band revealed metal-oxygen stretching vibration at the octahedral sites (B). These vibrations were attributed to the shorter bond length of the metal-oxygen link in the tetrahedral sites and the larger metal-oxygen bond length in the octahedral sites. A bending vibration mode of O-H was seen at 1630 cm⁻¹, indicating both free and absorbed water [18]. The length of the metal oxide bonds in each site caused a shift in the placement of the tetrahedral and octahedral bands. The presence of Fe²⁺ cations on the octahedral sites was confirmed by a shoulder near the octahedral absorption band. The cations caused the absorption band to split due to the Jahn-Teller phenomenon, which occurred due to local deformations in the lattice [19].

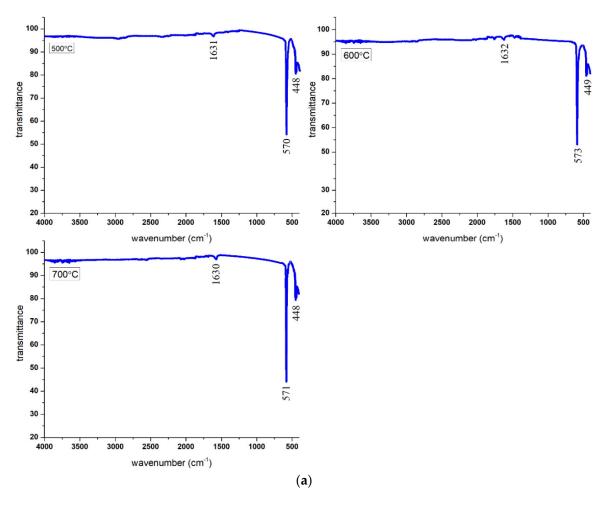


Figure 1. Cont.

Materials 2022, 15, 4009 6 of 28

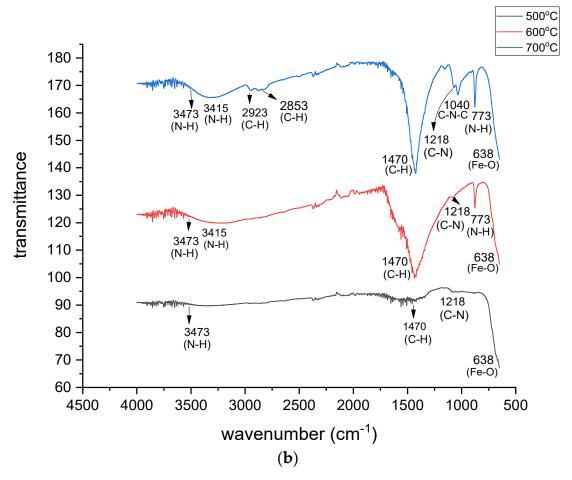


Figure 1. (a) FTIR spectra of pristine MgFe₂O₄ adsorbent calcined at different temperatures. (b) FTIR spectra of amine-functionalized magnesium ferrite nanoparticles calcined at different temperatures.

The MgFe₂O₄ samples were amine-functionalized after calcination at different temperatures. No calcination was performed after the amine functionalization of the adsorbent samples. Therefore, the FTIR spectra of the functionalized adsorbents and the level of functionalization are discussed based on the calcination of the pristine samples. Figure 1b shows that there was a small difference between the FTIR spectra of the $MgFe_2O_4$ - NH_2 samples obtained after the calcination of the pristine MgFe₂O₄ at 600 °C and at 700 °C. However, the FTIR spectrum of the MgFe₂O₄-NH₂ nanoparticles at 500 °C was different from the other two spectra. The FTIR spectra of the MgFe₂O₄-NH₂ nanoparticles and the pristine calcined at 500 °C, differed because at low temperatures, the active sites on the surfaces of the particles were low in number and no definite sharp peaks were formed. As the temperature increased, more active sites were produced on the nanoadsorbent surface, revealing the attachment of the functional groups. A rise in calcination temperature might have impacted the particle size and exothermic reactions of the oxidation of the adsorbent particles and, consequently, the level of functionalization. The density of the adsorbent nanoclusters increased on heating due to the occurrence of oxidation, the recrystallization of the clusters, and the removal of the impure products at high temperatures. The oxidation and crystal reformation enhanced the inter-grain spacing and surface porosity of the adsorbent particles. Therefore, as the calcination temperature of the pristine adsorbent increased, extra active sites were produced on the adsorbent surface, revealing the attachment of an excessive number of functional groups.

The creation of the Fe-O stretching mode by the $MgFe_2O_4$ is marked by a spectral line at 638 cm⁻¹, which confirms the spinel structure of the adsorbent. An FTIR peak at 773 cm⁻¹ indicates the N-H wagging mode. The Fe-O vibrations masked the Fe-O-Si bonds

Materials 2022, 15, 4009 7 of 28

in the FTIR spectrum. Similarly, an FTIR peak at $1040~\rm cm^{-1}$ shows the formation of the C-N-C asymmetric stretching mode. This mode also shows C-O overlapping with C-N stretching vibration, which offers confirmation of the attachment of the amine-functional groups on the adsorbent. The peak around $1218~\rm cm^{-1}$ reflects the C-N stretching mode. The peak around $1470~\rm cm^{-1}$ indicates the C-H scissoring mode. The pair of peaks at $3415~\rm and~3473~\rm cm^{-1}$ represents the N-H stretching of athe mine, which confirms the grafting of the amine onto the MgFe₂O₄ nanoparticles. These peaks are missing in the FTIR spectra of the pristine MgFe₂O₄ nanoparticles, as shown in Figure 1a. The peaks at 2923 cm⁻¹ and $2853~\rm cm^{-1}$ show the C-H stretching vibration bond in the ethanolamine. The low-frequency peaks in the $500-850~\rm cm^{-1}$ range show the stretching modes of the Fe-O and Mg-O in the spinel MgFe₂O₄.

The TGA plots in Figure 2 were analyzed to calculate the amount of amine on the surface of the functionalized adsorbent. The sample was heat-treated by raising the temperature from ambient to 600 °C at a fixed rate of 10 °C/min. To quantify the decomposition of the amine coating on the adsorbent surface, the weight loss of the pristine adsorbent was compared to that of the functionalized adsorbent during heating. The weight loss began at 100 °C and continued until 600 °C. The weight loss was rapid between 200 °C and 400 °C, before gradually decreasing to a steady state. The pristine and amine-functionalized adsorbents exhibited weight losses of 4.7% and 6.2%, respectively. The weight loss of the pristine adsorbent was mainly due to evaporation of moisture content in the adsorbent through chemical and physical processes and the stabilizer used to stabilize the particle size. The weight loss of the functionalized adsorbent was higher than that of the pristine adsorbent due to the decomposition of the functional groups conjugated on the adsorbent surface [20]. The amount of amine groups attached to the adsorbent was measured at about 1.5%. The amount of amine groups was measured from the difference in the initial weight losses (%) of the pristine and functionalized adsorbent nanoparticles at a temperature below 300 °C. The difference in weight loss values was equal to the amount of functional groups and bound water. Thus, the FTIR and TGA analyses confirmed that the magnetic adsorbent was functionalized with amine groups. The functionalized adsorbent was highly stable in water due to the H-bonding between the water and the amine groups of the functionalized adsorbent [21].

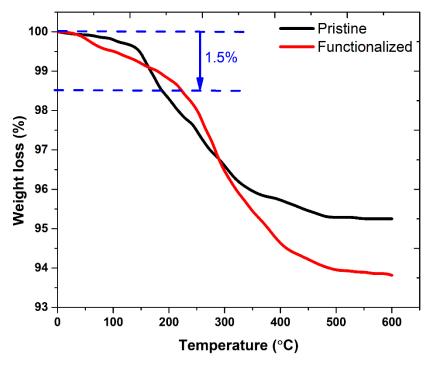


Figure 2. TGA profiles of pristine and amine-functionalized adsorbents.

Materials 2022, 15, 4009 8 of 28

3.3. UV-Visible Analysis

UV-visible spectroscopy was conducted to study the optical properties of the synthesized sample. The UV-visible absorption spectra of the $MgFe_2O_4$ and $MgFe_2O_4$ - NH_2 nanoparticles, calcined at different temperatures, are reported in Figures 3 and 4, respectively. These spectra reveal high absorption in the ultraviolet and visible regions. The bandgap energy was determined from the expression of the absorption coefficient near the band edge by supposing a direct bandgap using Tauc relation, given as follows:

$$E_g = \frac{h.c}{\lambda_{max}}$$

where, h is the Plank constant, λ_{max} is the wavelength at the absorption edge, and c is the speed of light. The E_g values of the pristine MgFe₂O₄ nanoparticles, calcined at 500 °C, 600 °C, and 700 °C, were calculated at around 2.05 eV, 2.03 eV, and 2.00 eV, respectively. The E_g values of the MgFe₂O₄-NH₂ nanoparticles were calculated at around 2.09 eV, 2.08 eV, and 2.06 eV, respectively. The bandgap energy decreased as the temperature of the calcination increased in both the pristine and amine-functionalized adsorbents. The crystallite growth of the synthesized products was most probably due to the lowering of the bandgap energy at high calcination temperatures. The UV spectra were measured by preparing the suspensions of the pristine and functionalized nanoparticles. The bandgap energy and UV absorption of the adsorbent nanoparticles were found nearly in the visible region. This showed that the light absorption partly dominated the light-scattering part, since scattering is inversely proportional to the wavelength. The longer the wavelength, the lower the scattering factor.

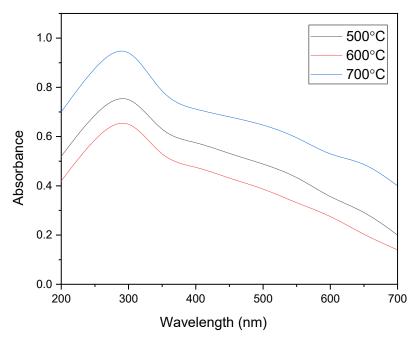


Figure 3. UV absorption profiles of pristine MgFe₂O₄ nanoparticles calcined at different temperatures.

The $MgFe_2O_4$ - NH^2 samples showed a stronger absorbance peak than the pristine $MgFe_2O_4$ nanoparticles. The ethanolamine-functionalized $MgFe_2O_4$ nanoparticles were expected to enhance the absorbance peak intensity due to the deposition of the nonmagnetic amino groups on the adsorbent. It was revealed that the absorbance intensity depends on the number of reactive $-NH_2$ groups attached to the surface. The amount of $-NH_2$ group on the nanoparticle surface increases with the calcination temperature due to increased surface roughness and the porosity of the nanoparticles.

Materials 2022, 15, 4009 9 of 28

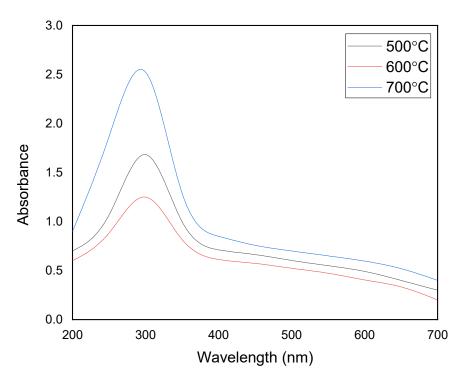


Figure 4. UV absorption profiles of MgFe₂O₄-NH₂ samples calcined at different temperatures.

4. Morphology and Size Distribution

SEM images were produced to elaborate the morphology and size of the spinel MgFe $_2$ O $_4$ nanoparticles. Figure 5a,b compares the SEM morphologies of the pristine and amine-functionalized MgFe $_2$ O $_4$ nanoparticles at 700 °C. The pristine MgFe $_2$ O $_4$ nanoparticles were uniformly dispersed, less agglomerated, and homogeneous, with an average particle size slightly larger than that of the functionalized nanoparticles. The silanization and functionalization processes prevented the agglomeration of the nanoparticles. The calcination temperature did not cause significant changes in surface morphology. As shown in Figure 6, the particle size of the pristine MgFe $_2$ O $_4$ at 500 °C, 600 °C, and 700 °C was measured at about 527.41 nm, 620.5 nm, and 762.32 nm, respectively. The particle size slightly decreased after the amine functionalization. The pre- and post-functionalization morphologies of MgFe $_2$ O $_4$ were assessed further by producing STEM images, as shown in Figure 5c,d. The STEM images showed a slight change in morphology after functionalization. The shapes and boundaries of the nanoparticles were clearer compared to the pristine nanoparticles. A thin coating of functional material on the nanoparticle surface can also be seen in the form of light shade circling the nanoparticles.

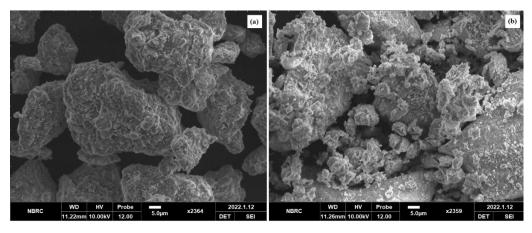


Figure 5. Cont.

Materials **2022**, 15, 4009 10 of 28

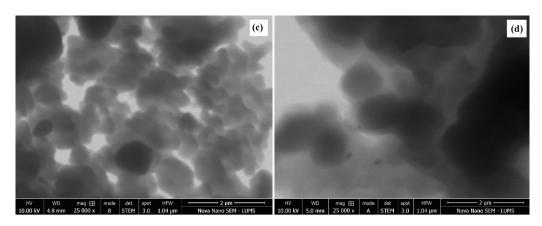


Figure 5. (a) SEM micrograph of pristine $MgFe_2O_4$, (b) SEM micrograph of amine-functionalized $MgFe_2O_4$, (c) STEM micrograph of pristine $MgFe_2O_4$, (d) STEM micrograph of amine-functionalized $MgFe_2O_4$.

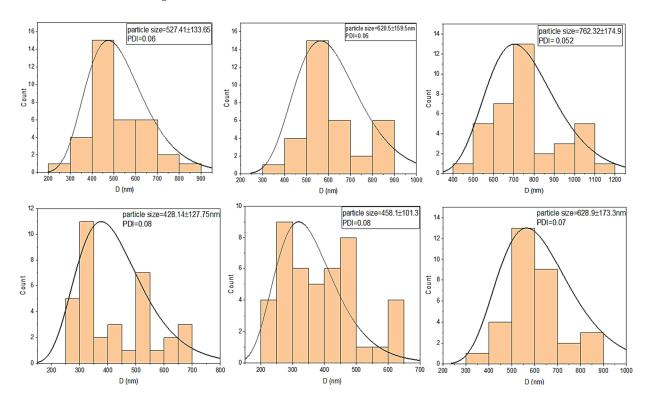


Figure 6. Particle-size histograms of pristine and amine-functionalized MgFe₂O₄ nanoparticles calcined at different temperatures.

These results show that the functionalization of $MgFe_2O_4$ nanoparticles can reduce the agglomeration of pristine ferrite nanoparticles. The grain sizes of the amine-functionalized $MgFe_2O_4$ at different temperatures were measured at about 428.14 nm, 458.1 nm, and 628.9 nm, respectively. Some of the histograms, presented in Figure 6, showed a slightly bimodal distribution in the particle sizes, as depicted by major and minor modes. The bimodal distribution was not important in our case, since we determined the average size of one class of particles. The bimodal distribution is only important when the sizes of different species or types of particles are being studied. This distribution is commonly used to examine individual size subpopulations to better understand individual distributions.

Materials **2022**, 15, 4009 11 of 28

4.1. Adsorption Kinetics

The pseudo models were developed to understand the adsorption kinetics. In reversible reactions in which an equilibrium is maintained between the solid and liquid phases, the pseudo-first-order kinetics are utilized, implying physisorption instead of chemisorption. The kinetic process of heavy metal ions' adsorption onto the adsorbents is explained through the pseudo-second-order model. The cation exchange capacity of adsorbents is influenced by a chemical interaction among the surface functional groups and heavy metal ions.

For the study of kinetic parameters, the adsorbent is added to heavy water and the resulting solution is stirred. The agitation time is changed and the corresponding initial and final metal ion concentration in the aqueous solution is monitored. At a certain point in time, the concentration does not change further. At this point, the final concentration is equal to the equilibrium concentration. The adsorption capacity (q_e) is determined by defining C_f as C_e in the following formula:

$$q_t = \frac{\left(C_i - C_f\right)V}{m}$$

where q_t is the quantity of metal ions adsorbed by the adsorbent, C_i is the initial concentration of heavy metals in the aqueous solution, and C_f is the final concentration of heavy metals. The volume of heavy metals in the solution is represented by V, while m represents the mass of the dry adsorbent in grams. For the pseudo-first-order model, the graph is plotted between t and $\log(q_e-q_t)$, and the resulting line equation is compared with the integrated linear form of the pseudo-first-order model. The slope and intercept of the line is used to calculate the pseudo-first-order parameters. For the pseudo-second-order model, the graph is plotted between t and t/q_t and the resulting line equation is compared with the integrated linear form of the pseudo-second-order model. The slope and intercept of the line is used to calculate the pseudo-first-order parameters.

For plotting isotherm models, the parameters C_e and q_e are used. C_e is the concentration of the adsorbate in the aqueous solution after adsorption. From C_e , q_e is calculated by using the above equation. For Langmuir isotherms, the graph is plotted between C_e and C_e/q_e , and the resulting line equation is compared with the linear form of the Langmuir isotherm model. The slope and intercept of the line is used to calculate the isotherm parameters. For Freundlich model, the graph is plotted between $\log C_e$ and $\log Q_e$, and the resulting line equation is compared with the linear form of the Freundlich model. The slope and intercept of the line is used to calculate the Freundlich parameters. In the present work, the pseudo-second-order model fit the best. This model suggests chemisorption, i.e., chemical changes occur when the adsorbate binds with the adsorbent. As a result, heavy metal ion adsorption onto the prepared sample occurred via chemisorption rather than physisorption.

4.2. Pseudo-First-Order Kinetics

The pseudo-first-order model is premised on the idea that a change in the solute takeup rate can have a direct relationship with the difference in the saturation concentrations and the amount of solid take-up with time, and it is widely applicable during the first phase of adsorption processes. For adsorption, occuring via diffusion through an interface, the kinetics are typically observed to fit pseudo-first-order rate equation. The linear form of the pseudo-first-order model is as follows.

$$\frac{dq_t}{dt} = k_1 \left(q_e - q_t \right)$$

Materials 2022, 15, 4009 12 of 28

where q_t and q_e (milligram/gram) represent the quantity adsorbed at "t" time and at equilibrium, respectively, while k_1 denotes the pseudo-first-order model's constant at equilibrium. After applying the integration and boundary conditions, the above equation becomes:

$$log(q_e - q_t) = log(qe) - \frac{k_1}{2.303} t$$

The linear graphs of the $log(q_e - q_t)$ over time are used to find the k_1 value. If adsorption obeys first-order kinetics, the intercept of the $log(q_e - q_t)$ against the t plot is equal to $log(q_e)$. For slower adsorption, the correct equilibrium condition can be difficult to attain, making a precise determination of q_e extremely difficult [22].

4.3. Pseudo-Second-Order Kinetics

The pseudo-second-order kientics are premised on the idea that chemisorption is a rate-limiting phase, which predicts adsorption behavior throughout the adsorption process. The adsorption capacity, rather than the adsorbate concentration, determines the rate of adsorption in this situation. The main benefit of this model over the pseudo-first-order model is that the adsorption capacity at equilibrium may be derived from this model, eliminating the requirement of measuring the equilibrium adsorption capacity via experiment. For pseudo-second-order kinetics, the differential expression is as follows:

$$\frac{dq_t}{dt} = k_2 \left(q_e - q_t \right)^2$$

After the mathematical elaboration and consideration of the boundary condition, the pseudo-second-order model is:

$$\frac{t}{q_t} = \frac{1}{k_2 q_e^2} + \frac{t}{q_e}$$

with

$$h = k_2 q_e^2$$

where h denotes the initial sorption rate, q_e (milligram/gram) represents the equilibrium quantity of the adsorbed dye, and k_2 represents the pseudo-second-order model rate-constant (gram/milligram.minute). A direct relationship should emerge when plotting t/q_t against t. We can determine the quantity of theadsorbed adsorbate at the equilibrium using the slope $(1/q_e)$ and intercept $(1/h \text{ or } 1/k_2q_e^2)$, which yields the second-order rate constant, k_2 [22].

4.4. Pseudo Models for Adsorption of Cu²⁺ onto MgFe₂O₄-NH₂ Nanoparticles

It is reported that the amount of copper adsorbed on magnetic ferrite nanoparticles at equilibrium is about 2.32 mg/g. The pseudo-first-order kinetics were used in these calculations [23]. The value of q_e , obtained using pseudo-second-order kinetics, is around 149.25 mg/g. Based on the pseudo-first-order model, the plots of the adsorption of the Cu⁺² onto the MgFe₂O₄-NH₂ nanoparticles are reported in Figure 7, and the subsequent computed kinetic parameters are reported in Table 1. It is shown that the kinetic parameters of the adsorbent, calcined at different temperatures, did not differ notably. For the second-order model, the plots of the Cu²⁺ adsorption onto the MgFe₂O₄-NH₂ nanoparticles are shown in Figure 8, and the subsequent computed kinetic parameters are reported in Table 1. The pseudo-second-order relation yielded a better-fitting straight line when the correlation coefficient (R²) was taken into account. These results indicated that Cu²⁺ adsorption on amine-treated ferrite nanoparticles occurs through the chemisorption process.

Materials **2022**, 15, 4009 13 of 28

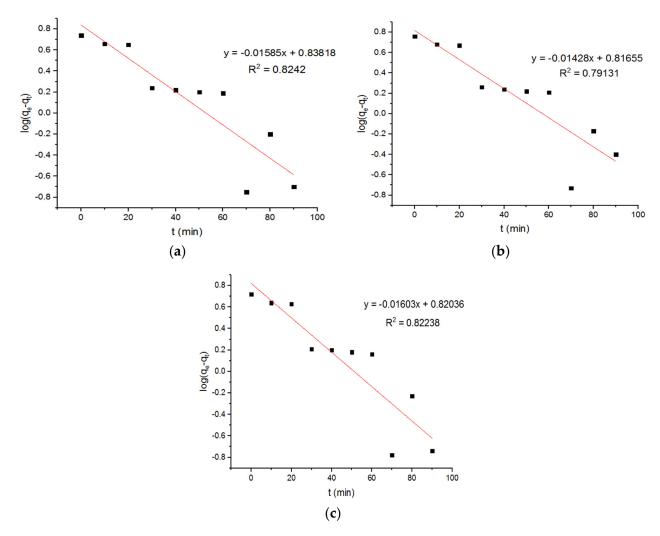


Figure 7. Pseudo-first-order adsorption plots of Cu^{+2} ions onto $MgFe_2O_4$ - NH_2 nanoparticle prefunctionalization-calcined at (a) 500 °C, (b) 600 °C, and (c) 700 °C.

Table 1. Pseudo-first- and second-order-based adsorption rate constant for Cu⁺² ions.

	Adsorption of Cu ⁺² onto MgFe ₂ O ₄ -NH ₂ NPs (First-Order Model)							
$k_1 \pmod{\min^{-1}}$	q _e (mg/g)	\mathbb{R}^2	$\begin{array}{c} k_1 \\ (\text{min}^{-1}) \end{array}$	q _e (mg/g)	\mathbb{R}^2	$k_1 \pmod{\min^{-1}}$	q _e (mg/g)	R ²
0.036	6.89	0.8242	0.032	6.55	0.79131	0.037	6.61	0.82238
	Adsorption of Cu ⁺² onto MgFe ₂ O ₄ -NH ₂ NPs (Second-Order Model)							
	500 °C			600 °C			700 °C	
k ₂ (g/mg. min)	q _e (mg/g)	R ²	k ₂ (g/mg. min)	q _e (mg/g)	R ²	k ₂ (g/mg. min)	q _e (mg/g)	R ²
-0.291	39.68	0.95623	-0.018	50.20	0.95042	-0.136	39.38	0.96127

Materials 2022, 15, 4009 14 of 28

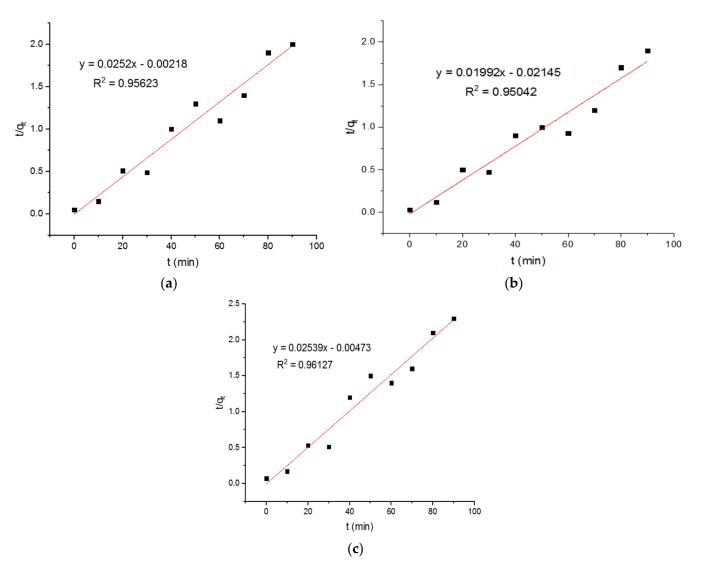


Figure 8. Pseudo-second-order adsorption plots of Cu^{+2} ions onto MgFe₂O₄-NH₂ nanoparticles pre-functionalization-calcined at (a) 500 °C, (b) 600 °C, and (c) 700 °C.

4.5. Pseudo Models for Adsorption of Pb²⁺ onto MgFe₂O₄-NH₂ Nanoparticles

Tran et al. [24] reported that the amount of lead adsorbed on $Cu_{0.5}Mg_{0.5}Fe_2O_4$ at equilibrium is about 3.66 mg/g. They used pseudo-first-order kinetics and calculated q_e at around 38.2 mg/g. The plots of adsorption the Pb^{2+} ions onto the $MgFe_2O_4$ - NH_2 nanoparticles, based on pseudo-first-order kinetics at pre-functionalization calcination temperatures, are reported in Figure 9, and the subsequent computed kinetic parameters are reported in Table 2. It is shown that the kinetic parameters at 500 °C and 700 °C did not differ significantly. Three pseudo-second-order plots for the adsorption of Pb^{2+} ions onto $MgFe_2O_4$ - NH_2 nanoparticles are reported in Figure 10, and the subsequent computed kinetic parameters are reported in Table 2. It is shown that the kinetic parameters at different calcination temperatures did not differ significantly.

Materials **2022**, 15, 4009 15 of 28

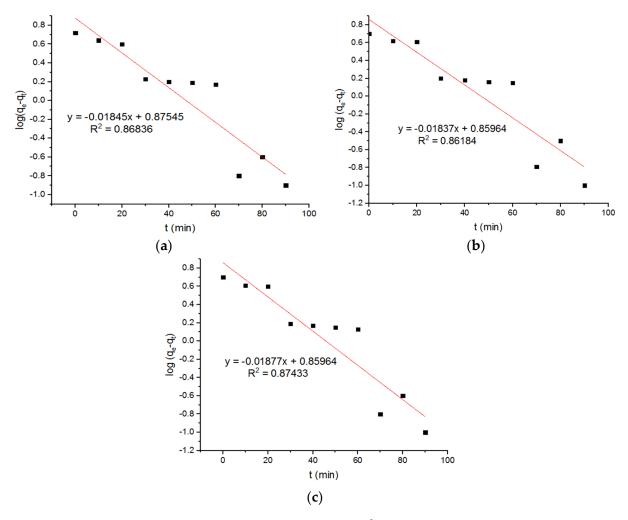


Figure 9. Pseudo-first-order plots for Pb²⁺ adsorption onto MgFe₂O₄-NH₂ nanoparticles prefunctionalization-calcined at (a) 500 °C, (b) 600 °C, and (c) 700 °C.

 Table 2. Pseudo-first- and second-order-based adsorption rate constant.

Adsorption of Pb ²⁺ onto MgFe ₂ O ₄ -NH ₂ NPs (Pseudo-First-Order Model)								
	500 °C		600 °C			700 °C		
$\frac{k_1}{(\text{min}^{-1})}$	q _e (mg/g)	R ²	$k_1 \pmod{\min^{-1}}$	q _e (mg/g)	R ²	k ₁ (min ⁻¹)	q _e (mg/g)	R ²
0.042	7.24	0.86184	0.0425	7.50	0.86836	0.043	7.23	0.87433
	A	dsorption o	f Pb ²⁺ onto MgFe ₂	O ₄ -NH ₂ NPs	(Pseudo-Secon	nd-Order Model)		
	500 °C			600 °C			700 °C	
k ₂ (g/mg. min)	q _e (mg/g)	R ²	k ₂ (g/mg. min)	q _e (mg/g)	R ²	k ₂ (g/mg. min)	q _e (mg/g)	R ²
-0.0136	35.98	0.9906	-0.011	39.2	0.98648	-0.096	33.68	0.98048

Materials **2022**, 15, 4009 16 of 28

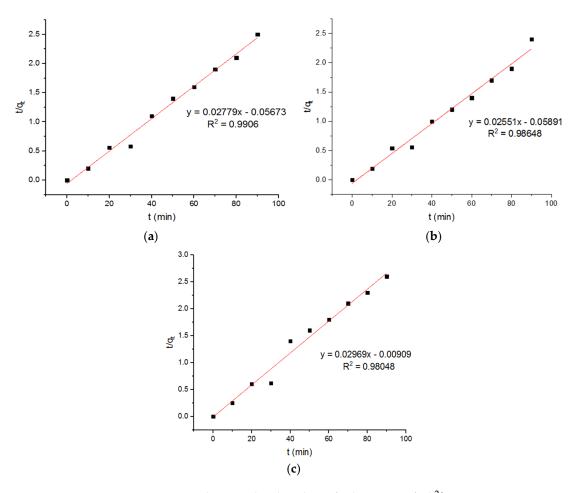


Figure 10. Pseudo-second-order plots of adsorption of Pb²⁺ onto MgFe₂O₄-NH₂ nanoparticles pre-functionalization-calcined at (a) 500 °C (b) 600 °C, and (c) 700 °C.

4.6. Pseudo Models for Adsorption of Zn²⁺ onto MgFe₂O₄-NH₂ Nanoparticles

The plots of the pseudo-first-order and second-order adsorption of the Zn^{2+} ions onto the $MgFe_2O_4$ - NH_2 nanoparticles, pre-functionalization-calcined at different temperatures, are presented in Figures 11 and 12, respectively. The subsequent kinetic parameters are reported in Table 3. It is shown that the kinetic parameters at different calcination temperatures did not differ significantly.

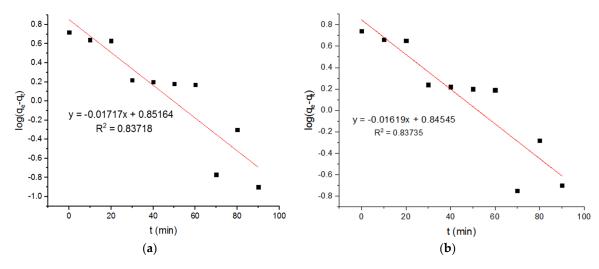


Figure 11. Cont.

Materials **2022**, 15, 4009 17 of 28

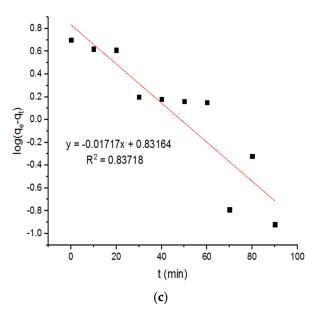


Figure 11. Pseudo-first-order plots for adsorption of Zn^{2+} ions onto $MgFe_2O_4$ - NH_2 nanoparticles pre-functionalization-calcined at (a) 500 °C, (b) 600 °C, and (c) 700 °C.

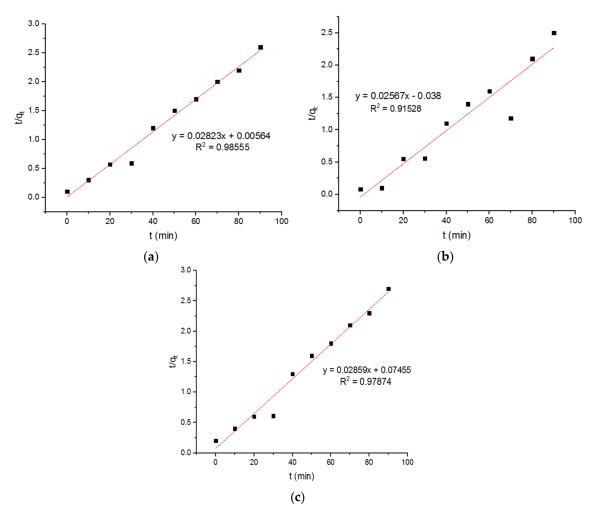


Figure 12. Pseudo-second-order plots for adsorption of Zn^{2+} ions onto MgFe₂O₄-NH₂ nanoparticles pre-functionalization-calcined at **(a)** 500 °C, **(b)** 600 °C, and **(c)** 700 °C.

Materials 2022, 15, 4009 18 of 28

Adsorption of Zn ⁺² onto MgFe ₂ O ₄ -NH ₂ NPs (Pseudo-Firstst-Order Model)									
	500 °C			600 °C			700 °C		
k_1 (min ⁻¹)	q _e (mg/g)	R ²	$k_1 \pmod{\min^{-1}}$	q _e (mg/g)	R ²	$k_1 \pmod{\min^{-1}}$	q _e (mg/g)	R ²	
0.039	7.106	0.83718	0.037	7	0.83735	0.0395	6.79	0.83718	
	Α	dsorption of	Zn ²⁺ onto MgFe ₂	O ₄ -NH ₂ NPs	(Pseudo-Seco	nd-Order Model)			
	500 °C			600 °C			700 °C		
k ₂ (g/mg. min)	q _e (mg/g)	R ²	k ₂ (g/mg. min)	q _e (mg/g)	R ²	k ₂ (g/mg. min)	q _e (mg/g)	R ²	
0.141	35.42	0.98555	-0.0173	38.95	0.91528	0.01	34.98	0.97874	

Table 3. Adsorption rate constant calculated from pseudo models.

5. Adsorption Isotherms

Th adsorption isotherms were investigated utilizing both Freundlich and Langmuir isotherms. It was demonstrated how the adsorbent interacted with the adsorbates. The Langmuir model involves the homogeneous monolayered adsorption of pollutants onto the adsorbent by excluding the multilayer capillary-condensation. It simply indicates that the more binding sites are present on the surface of adsorbent, the more effective the adsorption. The Freundlich isotherm is well described for the surface of heterogeneous adsorbents, with many types of adsorption site.

5.1. Langmuir Model

The adsorbate and adsorbent remain in dynamic equilibrium in monolayer adsorptions and the Langmuir model. The Langmuir adsorption isotherm was created to explain gas-to-solid-phase adsorption, but it was later used to examine the solid-liquid interface. Fractional coverage is a measure of how much of the surface is covered, and it is determined by the adsorbate concentration. The mathematical evolution is based on a physical simplification of the mechanism regarding certain assumptions: (1) the surfaces are homogeneous, implying that almost all the sites are equivalent energetically, (2) adsorption is the monolayer procedure in which every site may only adsorb one adsorbate molecule, (3) adsorbed molecules do not network with each other laterally, and (4) adsorption can be reversed.

The Langmuir adsorption isotherm is expressed as:

$$q_e = \frac{K_L Q_m C_e}{1 + K_L C_e}$$

where C_e (mole/litter) and Q_m (milligram/gram or mole/gram) indicate the equilibrium concentration and maximum adsorption capacity, respectively, and the Langmuir constant ' K_L ' is the adsorption energy or adsorbate–adsorbent constant at equilibrium. This equation can be transformed into linear form as:

$$\frac{1}{q_e} = \frac{1}{K_L Q_m C_e} + \frac{1}{Q_m}$$
$$\frac{C_e}{q_e} = \frac{1}{K_L Q_m} + \frac{C_e}{Q_m}$$

Langmuir constants can be determined by plotting $1/q_e$ against $1/C_e$, or the C_e/q_e against C_e [22].

5.2. Freundlich Model

Reversible, non-ideal, multilayer adsorption at heterogeneous surfaces can be described by the Freundlich adsorption isotherm. The binding energies of adsorption sites differs according to the isotherm. Instead of uniform energy, the energy distributions at the

Materials 2022, 15, 4009 19 of 28

adsorbing sites have spectra with varied binding energy values and obey the exponential function that is closer to the actual situation [25].

$$q_e = K_F C_e^{1/n}$$

where C_e (mole/litter) is the adsorbate concentration under equilibrium. The dsorption intensity and the capacity of the adsorption are represented by the Freundlich constants 1/n and K_F , respectively. By applying logarithms, the above equation can indeed be represented as:


$$log(qe) = logK_F + (1/n) logC_e$$

where the n and K_F parameters can be accessed by representing $log(q_e)$ as the function of C_e . The 1/n value provides useful information about the adsorption processes. A 1/n value of less than one indicates chemisorption or a typical Langmuir adsorption isotherm, and a 1/n value greater than one indicates cooperative adsorption [22].

5.3. Isotherm Models for Cu²⁺ Adsorption onto MgFe₂O₄-NH₂ Nanoparticles

Ivanets et al. [7] reported that the magnesium ferrite nano-adsorbents possessed a maximum capacity for Cu^{2+} , calculated from the Langmuir equation, around 0.49 mmol/g. Liu et al. [23] found that the maximum adsorption capacity (q_m) of magnetic ferrite nanoparticles for Cu^{2+} is about 124.8 mg/g. The value of R^2 for the Langmuir isotherm is greater than the R^2 value for the Freundlich adsorption isotherm. This indicates that the Langmuir isotherm is best fitted to the adsorption of copper (II) ions.

Three Langmuir plots for the adsorption of the Cu^{2+} ions onto the MgFe₂O₄-NH₂ nanoparticles, calcined at 500 °C, 600 °C, and 700 °C, are shown in Figure 13, and the subsequent computed isotherm parameters are reported in Table 4. It is shown that the isotherm parameters at different calcination temperatures did not differ significantly. Three Freundlich plots for the adsorption of the Cu^{2+} ions onto the MgFe₂O₄-NH₂ nanoparticles, pre-functionalization-calcined at 500 °C, 600 °C, and 700 °C, are shown in Figure 14, and the subsequent computed isotherm parameters are reported in Table 4, which indicates that the isotherm parameters at different calcination temperatures did not differ significantly. The results show that the Langmuir model has a higher R^2 value than the Freundlich model, indicating that it fits better.

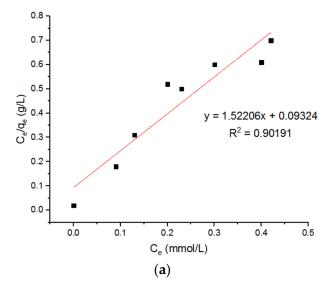

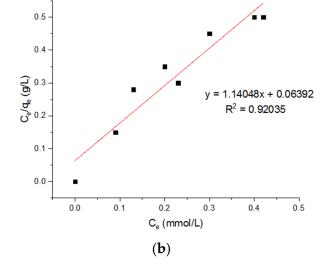


Figure 13. Cont.

Materials **2022**, 15, 4009 20 of 28

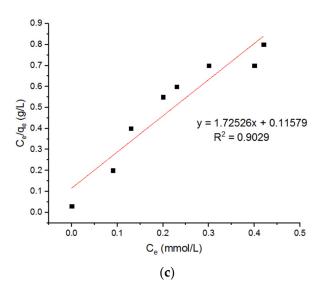


Figure 13. Langmuir plots for adsorption of Cu^{2+} ions onto MgFe₂O₄-NH₂ nanoparticles prefunctionalization-calcined at (a) 500 °C, (b) 600 °C, and (c) 700 °C.

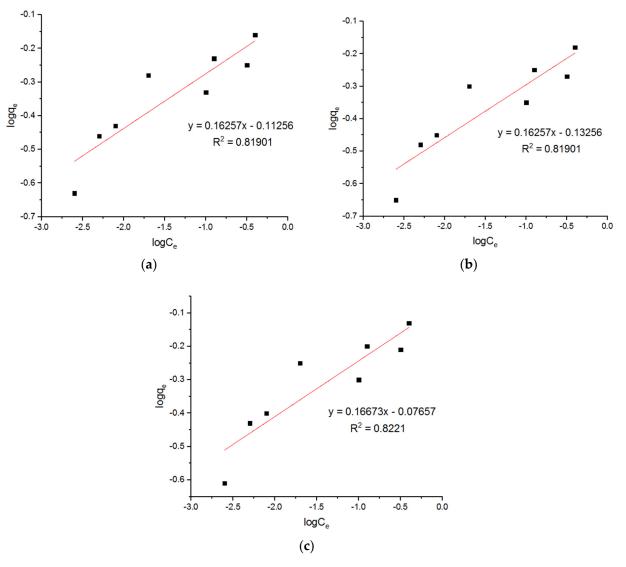


Figure 14. Freundlich plots for adsorption of Cu^{2+} onto $MgFe_2O_4$ - NH_2 nanoparticles prefunctionalization-calcined at (a) 500 °C, (b) 600 °C, and (c) 700 °C.

Materials **2022**, 15, 4009 21 of 28

	Langmuir Model for Adsorption of Cu ²⁺ onto MgFe ₂ O ₄ -NH ₂ Nanoparticles							
500	0 °C		600) °C		700) °C	
q _m (mmol/g)	K _L (L/mmol)	R ²	q _m (mmol/g)	K _L (L/mmol)	R ²	q _m (mmol/g)	K _L (L/mmol)	R ²
0.657	16.324	0.9019	0.877	17.84	0.92035	0.579	14.92	0.9029
	Fr	eundlich M	lodel for Adsorption of C	u ²⁺ onto MgF	Fe ₂ O ₄ -NH ₂	Nanoparticles		
500	0 °C		600) °C		700) °C	
$\frac{K_F}{(\text{mmol}^{1(1/n)}L^{1/n}/g)}$	n	R ²	$\frac{K_F}{(\text{mmol}^{1(1/n)}L^{1/n}/g)}$	n	R ²	$K_F \pmod{1(1/n)}L^{1/n}/g$	n	R ²
0.77	6.15	0.8190	0.73	6.15	0.8190	0.84	5.9	0.8221

Table 4. Isotherm parameters calculated from Langmuir and Freundlich model.

5.4. Isotherm Models for Pb²⁺ Adsorption onto MgFe₂O₄-NH₂ Nanoparticles

Tran et al. [24] reported that a $Cu_{0.5}Mg_{0.5}Fe_2O_4$ nano-adsorbent possessed a maximum capacity of 57.44 mg/g, as calculated from the Langmuir equation. The Langmuir plots for the adsorption of the Pb^{2+} ions onto the $MgFe_2O_4$ - NH_2 nanoparticles are shown in Figure 15, and the subsequent computed isotherm parameters are reported in Table 5. This shows that the isotherm parameters of the adsorbent, pre-functionalization-calcined at 500 °C and 700 °C, did not differ significantly. Three Freundlich plots for the adsorption of the Pb^{2+} onto the $MgFe_2O_4$ - NH_2 nanoparticles are shown in Figure 16, and subsequent computed isotherm parameters are reported in Table 5, which indicates that the isotherm parameters at different calcination temperatures are not significantly different.

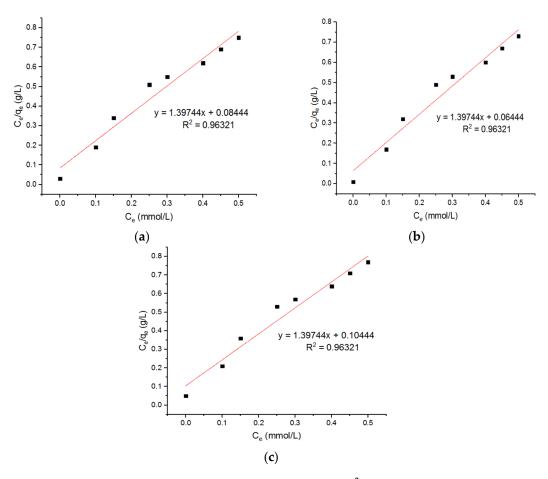


Figure 15. Langmuir plots for adsorption of Pb²⁺ onto MgFe₂O₄-NH₂ NPs pre-functionalization-calcined at (a) 500 °C, (b) 600 °C, and (c) 700 °C.

Materials **2022**, 15, 4009 22 of 28

Table 5. Isotherm	parameters calcula	ated from I	Langmuir model.

Langmuir Model for Adsorption of Pb ²⁺ Ions onto MgFe ₂ O ₄ -NH ₂ Nanoparticles Pre-Functionalization Thermally	Treated at 500 °C,
600 °C, and 700 °C.	

	500 °C			600 °C			700 °C	
q _m (mmol/g)	K _L (L/mmol)	R ²	q _m (mmol/g)	K _L (L/mmol)	R ²	q _m (mmol/g)	K _L (L/mmol)	R ²
0.715	16.56	0.96321	0.7155	21.69	0.96321	0.7156	13.38	0.96321

Freundlich Model for Adsorption of Pb $^{2+}$ Ions onto MgFe $_2$ O $_4$ -NH $_2$ Nanoparticles Pre-Functionalization Thermally Treated at 500 $^{\circ}$ C, 600 $^{\circ}$ C, and 700 $^{\circ}$ C.

500) °C		600) °C		700) °C	
$\frac{K_F}{(mmol^{1(1/n)}L^{1/n}/g)}$	n	R ²	$ \frac{K_F}{(\text{mmol}^{1(1/n)}L^{1/n}/g)} $	n	R ²		n	R ²
0.648	6.9	0.79804	0.61	6.90	0.7984	0.67	6.9	0.79804

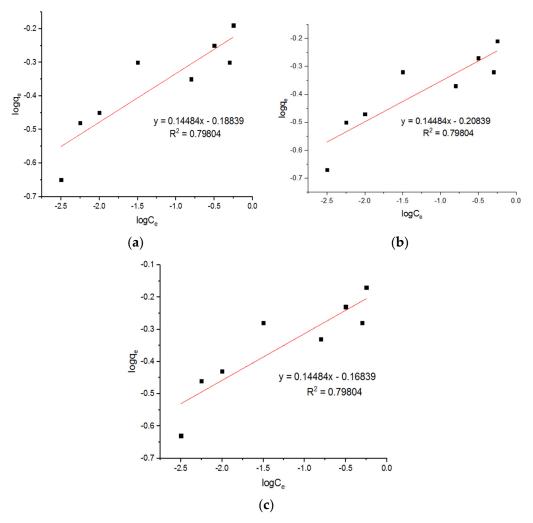


Figure 16. Freundlich plots for adsorption of Pb²⁺ onto MgFe₂O₄-NH₂ nanoparticles prefunctionalization-calcined at (a) $500 \,^{\circ}$ C, (b) $600 \,^{\circ}$ C, and (c) $700 \,^{\circ}$ C.

5.5. Isotherm Models for Zn^{2+} Adsorption onto $MgFe_2O_4$ - NH_2 Nanoparticles

Three Langmuir plots for the adsorption of the Zn^{2+} ions onto the MgFe₂O₄-NH₂ nanoparticles are shown in Figure 17, and the subsequent computed isotherm parameters are reported in Table 6. It is shown that the isotherm parameters at 500 °C and 700 °C did not change significantly. The Freundlich plots for the adsorption of the Zn^{2+} onto

Materials **2022**, 15, 4009 23 of 28

the MgFe₂O₄-NH₂ nanoparticles, pre-functionalization-calcined at 500 °C, 600 °C, and 700 °C are shown in Figure 18, and the subsequent isotherm parameters are reported in Table 6. It is shown that the isotherm parameters at different calcination temperatures did not differ significantly. The results indicate that the value of R^2 for the Langmuir isotherm was greater than the R^2 value for the Freundlich adsorption isotherm. This confirms that the Langmuir isotherm is best fitted to heavy metal ion adsorption.

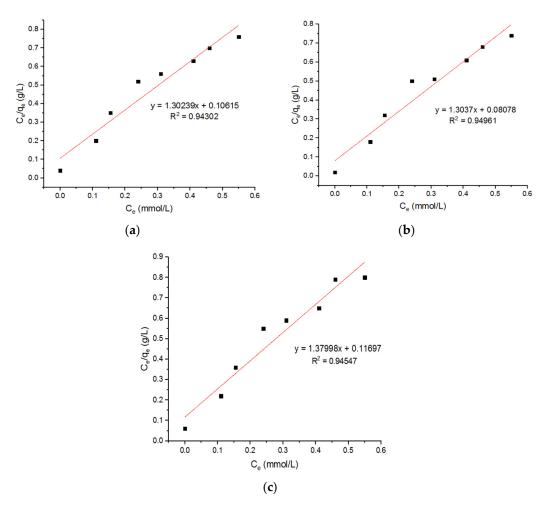


Figure 17. Langmuir plots for adsorption of Zn^{2+} ions onto MgFe₂O₄-NH₂ nanoparticles prefunctionalization-calcined at (a) 500 °C, (b) 600 °C, and (c) 700 °C.

Table 6. Isotherm parameters calculated from Langmuir model.

1							
		60	00 °C		70	00 °C	
K _L 'mmol)	R ²	q _m (mmol/g)	K _L (L/mmol)	R ²	q _m (mmol/g)	K _L (L/mmol)	R ²
12.27 0.	94302	0.767	16.14	0.94961	0.724	11.80	0.94547
or Adsorption	of Zn ²⁺ Io			les Pre-Func	tionalization Thermally	Treated at 500) °C,
•		60	00 °C		70	00 °C	
N	R ² (K_F (mmol ^{1(1/n)} L ^{1/n} /g)	n	R ²	$\frac{K_F}{(\text{mmol}^{1(1/n)}L^{1/n}/g)}$	n	R ²
6.99 0.	75263	0.605	7.07	0.744	0.727	6.75	0.7608
	/mmol) 12.27 0. or Adsorption	/mmol) R ² 12.27 0.94302 or Adsorption of Zn ²⁺ Io	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	/mmol) R^2 (mmol/g) (L/mmol) 12.27 0.94302 0.767 16.14 or Adsorption of Zn^{2+} Ions onto $MgFe_2O_4$ - NH_2 Nanopartic 600 °C, and 700 °C. C 600 °C N R^2 K_F (mmol $^{1(1/n)}L^{1/n}/g$) n	/mmol) R^2 (mmol/g) (L/mmol) R^2 12.27 0.94302 0.767 16.14 0.94961 or Adsorption of Zn^{2+} Ions onto $MgFe_2O_4$ - NH_2 Nanoparticles Pre-Func 600 °C, and 700 °C. C 600 °C N R^2 R^2 (mmol $^{1(1/n)}L^{1/n}/g)$ n R^2	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$

Materials **2022**, 15, 4009 24 of 28

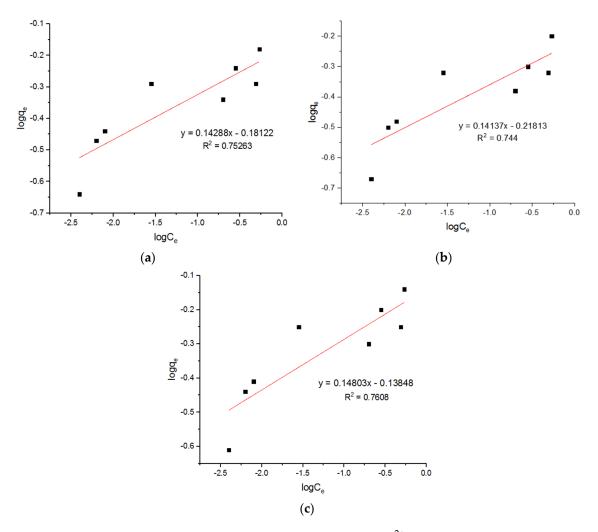


Figure 18. Freundlich plots for adsorption of Zn^{2+} ions onto MgFe₂O₄-NH₂ nanoparticles prefunctionalization-calcined at (a) 500 °C, (b) 600 °C, and (c) 700 °C.

It can be seen that this adsorption process followed the pseudo-second-order model and the Langmuir model, as in the process reported by Nonkumwong et al. [15] and Fan et al. [26]. The present work shows that the pseudo-second-order model and Langmuir model were better fitted the adsorption of different metal ions. There was no difference between different metal ions when the adsorption was taken into account. Table 7 summarizes a comparison of the q_m values achieved in this study with those in other published literature.

The published literature shows greatly varying q_m values for removing heavy metal ions. Some studies revealed a high adsorption of Pb^{2+} ions on nano-adsorbents, while others showed a high adsorption of Cu^{2+} ions. Ren et al. [27] used magnetic porous ferrospinel $MnFe_2O_4$ to adsorb Pb^{2+} and Cu^{2+} ions. They reported q_m values of 69 and 37, respectively. Our study revealed q_m values of 145.04 and 55.7 for the Pb^{2+} and Cu^{2+} ions, respectively. Although $MnFe_2O_4$ and $MnFe_2O_4$ magnetic adsorbents fall in the same class of spinel ferrites, the high adsorbtion of metal ions by the latter is attributed to ethanolamine functionalization of the adsorbent. The presence of $-NH_2$ groups on the surfaces $MnFe_2O_4$ nanoparticles enhances their adsorption capacity [28]. The heat treatment of the magnetic adsorbent also affects the level of functionalization and, consequently, the adsorption capacity. The number of $-NH_2$ groups attached to the surface increases with an increase in calcination temperature and surface roughness.

Tran et al. [24] used a $Mg_{0.5}Cu_{0.5}Fe_2O_4$ composite magnetic adsorbent to remove Pb²⁺ ions. They revealed a q_m value of 57.7, which was significantly lower than the values

Materials 2022, 15, 4009 25 of 28

reported by the current study. Duan et al. [29] used a Co_{0.6}Fe_{2.4}O₄ magnetic adsorbent and reported q_m values for Pb²⁺ ions in the range of 44.58 to 70.22, depending on the adsorbent synthesis conditions. Tamez et al. [30] used magnetic Fe₃O₄ adsorbent for the removal of heavy metals from aqueous medium. They reported q_m values in the range of 47.62 to 166.67 and 19.61 to 37.04 for Pb²⁺ and Cu²⁺ ions, respectively. All these studies revealed much lower adsorption capacities than the current study. The low adsorption was attributed the pristine nature of the adsorbent. However, some other researchers composited the magnetic materials with non-magnetic materials for the construction of efficient adsorbents for heavy metals. For instance, Kalantari et al. [31] used Fe₃O₄/montmorillonite (Fe₃O₄/MMT NC) for the removal of Pb²⁺, Ni²⁺, and Cu²⁺ ions from aqueous solutions. They measured q_m values of 263.15 and 70.92 for the Pb²⁺ and Cu²⁺ ions, respectively. Mittal et al. [32] reported a poly(methyl methacrylate)-decorated alginate/Fe₃O₄ composite as a novel adsorbent for heavy metals. The adsorption data for Pb²⁺ and Cu²⁺ ions were analyzed using the Freundlich, Langmuir, Sips, and Temkin models. The experimental data were fitted best to the Freundlich model. The adsorption capacities were 62.5 mg/g and 35.71 mg/g for the Pb²⁺ and Cu²⁺ ions, respectively. Lasheen et al. [33] used magnetite chitosan (NMag-CS) films for the adsorption of heavy metals. They reported adsorption capacities of 114.9 mg/g and 123.4 mg/g for Pb²⁺ and Cu²⁺ ions, respectively. For all the metals, the adsorption kinetics followed a pseudo-second-order equation. The nanomagnetic materials showed better finding capacities for the heavy metal ions when combined with magnetic materials.

Table 7. A comparison of maximum adsorption capacities of different adsorbents.

	q _m (r	- Rafarancas	
Adsorbent	Pb ²⁺	Cu ²⁺	References
Magnetic porous ferrospinel MnFe ₂ O ₄	69	37	[27]
EDTA-modified chitosan/SiO ₂ /Fe ₃ O ₄	12.5	44	[34]
Fe ₃ O ₄ @2,3-diaminophenol and formaldehyde nanorods	83	-	[35]
Chitosan-coated bentonite beads	-	12	[36]
Fe ₃ O ₄ -NH ₂ nanoparticles	40	-	[6]
Fe ₃ O ₄ @SiO ₂ -NH ₂ nanoparticles	76	-	[37]
$Mg_{0.5}Cu_{0.5}Fe_2O_4$	57.7	-	[24]
Fe ₃ O ₄ /montmorillonite	263.15	70.92	[31]
PMMA-gft-Alg/Fe ₃ O ₄	62.5	35.71	[32]
Co _{0.6} Fe _{2.4} O ₄	44.58 to 70.22	-	[29]
NMag-CS	114.9	123.4	[33]
Fe ₃ O ₄	47.62 to 166.67	19.61 to 37.04	[30]
MgFe ₂ O ₄ -NH ₂ nanoparticles	145.04	55.7	Present work

6. Removal Efficiency

The removal efficiencies of different cations achieved by utilizing MgFe $_2$ O $_4$ -NH $_2$ nanoparticles at different calcination temperatures are given in Table 8, which shows that the metal ions were largely removed by amine-functionalized nanoparticles prefunctionalization-calcined at 500 °C. Tan et al. [6] reported that about 98% of lead ions could be removed from tap water and wastewater by amino-functionalized Fe $_3$ O $_4$ magnetic nanoparticles. The reported adsorbent cannot selectively capture different metal ions.

Materials 2022, 15, 4009 26 of 28

Table 8. Metal ion removal efficiency of adsorbent pre-functionalization thermally treated at 500 °C,	
600 °C, and 700 °C.	

Metal Ions	Removal Efficiency at 500 °C (%)	Removal Efficiency at 600 °C (%)	Removal Efficiency at 700 °C (%)
Pb ²⁺	73	58	55
Cu ²⁺	59	58	56
Zn ²⁺	62	58	56

7. Conclusions

Magnesium ferrite (MgFe $_2$ O $_4$) was successfully prepared by using the sol-gel method. The amine functionalization of the ferrite nanoparticles was carried out by using ethanolamine as a surface modifier. The kinetic and isotherm analysis of Pb $^{2+}$, Cu $^{2+}$, and Zn $^{2+}$ adsorption on the surface of the MgFe $_2$ O $_4$ -NH $_2$ was carried out after carefully optimizing the adsorption conditions. The synthesized materials had good removal efficiency and a fast adsorption rate. These results suggest a process for industrial wastewater treatment. The kinetic parameters and adsorption isotherms for the adsorption of the metal ions onto the amine-functionalized MgFe $_2$ O $_4$ were obtained using the pseudo-first-order, pseudo-second-order, Langmuir, and Freundlich models. The pseudo-second-order and Langmuir models best described the adsorption kinetics and isotherms, implying strong chemisorption via the formation of coordinative bonds between the amine groups and metal ions. The Langmuir equation revealed the highest adsorption capacity of 0.7 mmol/g for the amine-functionalized MgFe $_2$ O $_4$ nano-adsorbent. The calcination temperature also had an effect on the adsorption capacity of the nano-adsorbent. The MgFe $_2$ O $_4$ sample, which was calcined at 500 °C, removed the most Pb $^{2+}$ (73%), Cu $^{2+}$ (59%), and Zn $^{2+}$ (62%) from the effluent.

Author Contributions: F.Z., H.H., M.I., M.Y.N. and S.S. were responsible for the data collection, software, methodology, visualization, analysis, and writing of the draft. S.L., I.K., D.G.-K. and M.I. performed the editing, validation, analysis, and resource management. M.H.M., M.A.A., A.A.J.G., S.R., O.A., F.S.A. and M.K.A.K. performed the editing, management, and final draft approval. M.I., M.H.M., and S.R. performed project management, funding acquisition, and validation. All authors have read and agreed to the published version of the manuscript.

Funding: The paper fee was paid through the Poznan University of Technology—project no. 0713/SBAD/0958.

Institutional Review Board Statement: Not applicable.

Informed Consent Statement: Not applicable.

Data Availability Statement: Not applicable.

Acknowledgments: The authors acknowledge the support from the Deanship of Scientific Research, Najran University, Kingdom of Saudi Arabia, for funding this work under the National Research Priorities funding program, code number (NU/NRP/SERC/11/26).

Conflicts of Interest: The authors declare no conflict of interest.

References

- 1. Gautam, R.K.; Sharma, S.K.; Mahiya, S.; Chattopadhyaya, M.C. CHAPTER 1 Contamination of Heavy Metals in Aquatic Media: Transport, Toxicity and Technologies for Remediation. In *Heavy Metals in Water: Presence, Removal and Safety*; The Royal Society of Chemistry: London, UK, 2015; pp. 1–24. [CrossRef]
- 2. Joseph, L.; Jun, B.-M.; Flora, J.R.V.; Park, C.M.; Yoon, Y. Removal of heavy metals from water sources in the developing world using low-cost materials: A review. *Chemosphere* **2019**, 229, 142–159. [CrossRef] [PubMed]
- 3. Fu, F.; Wang, Q. Removal of heavy metal ions from wastewaters: A review. *J. Environ. Manag.* **2011**, 92, 407–418. [CrossRef] [PubMed]
- 4. Suman, J.; Uhlik, O.; Viktorova, J.; Macek, T. Phytoextraction of Heavy Metals: A Promising Tool for Clean-Up of Polluted Environment? *Front. Plant Sci.* **2018**, *9*, 1–15. [CrossRef] [PubMed]

Materials **2022**, 15, 4009 27 of 28

5. Tandy, S.; Bossart, K.; Mueller, R.; Ritschel, J.; Hauser, L.; Schulin, R.; Nowack, B. Extraction of Heavy Metals from Soils Using Biodegradable Chelating Agents. *Environ. Sci. Technol.* **2004**, *38*, 937–944. [CrossRef] [PubMed]

- 6. Tan, Y.; Chen, M.; Hao, Y. High efficient removal of Pb (II) by amino-functionalized Fe3O4 magnetic nano-particles. *Chem. Eng. J.* **2012**, *191*, 104–111. [CrossRef]
- 7. Ivanets, A.; Srivastava, V.; Roshchina, M.Y.; Sillanpää, M.; Prozorovich, V.; Pankov, V. Magnesium ferrite nanoparticles as a magnetic sorbent for the removal of Mn²⁺, Co²⁺, Ni²⁺ and Cu²⁺ from aqueous solution. *Ceram. Int.* **2018**, 44, 9097–9104. [CrossRef]
- 8. Rauret, G. Extraction procedures for the determination of heavy metals in contaminated soil and sediment. *Talanta* **1998**, *46*, 449–455. [CrossRef]
- 9. Hu, H.; Xu, K. Chapter 8—Physicochemical technologies for HRPs and risk control. In *High-Risk Pollutants in Wastewater*; Ren, H., Zhang, X., Eds.; Elsevier: Amsterdam, The Netherlands, 2020; pp. 169–207. [CrossRef]
- 10. Xu, Y.; Zhou, Y.; Li, R. Simultaneous fluorescence response and adsorption of functionalized Fe₃O₄@SiO₂ nanoparticles to Cd²⁺, Zn²⁺ and Cu²⁺. *Colloids Surf. A Physicochem. Eng. Asp.* **2014**, 459, 240–246. [CrossRef]
- 11. Gómez-Pastora, J.; Bringas, E.; Ortiz, I. Recent progress and future challenges on the use of high performance magnetic nanoadsorbents in environmental applications. *Chem. Eng. J.* **2014**, 256, 187–204. [CrossRef]
- 12. Pradeep, A.; Priyadharsini, P.; Chandrasekaran, G. Sol–gel route of synthesis of nanoparticles of MgFe₂O₄ and XRD, FTIR and VSM study. *J. Magn. Magn. Mater.* **2008**, 320, 2774–2779. [CrossRef]
- Rashad, M.; El-Shaarawy, M.; Shash, N.; Maklad, M.; Afifi, F. Controlling the composition, microstructure, electrical and magnetic properties of LiFe₅O₈ powders synthesized by sol gel auto-combustion method using urea as a fuel. *J. Magn. Magn. Mater.* 2015, 374, 495–501. [CrossRef]
- 14. Gu, W.; Li, X.; Xing, M.; Fang, W.; Wu, D. Removal of phosphate from water by amine-functionalized copper ferrite chelated with La (III). *Sci. Total Environ.* **2018**, *619*, 42–48. [CrossRef]
- 15. Nonkumwong, J.; Ananta, S.; Srisombat, L. Effective removal of lead (II) from wastewater by amine-functionalized magnesium ferrite nanoparticles. *RSC Adv.* **2016**, *6*, 47382–47393. [CrossRef]
- 16. Wang, J.; Guo, X. Adsorption kinetic models: Physical meanings, applications, and solving methods. *J. Hazard. Mater.* **2020**, 390, 122156. [CrossRef] [PubMed]
- 17. Sharma, R.K.; Gaur, R.; Yadav, M.; Goswami, A.; Zbořil, R.; Gawande, M.B. An efficient copper-based magnetic nanocatalyst for the fixation of carbon dioxide at atmospheric pressure. *Sci. Rep.* **2018**, *8*, 1901. [CrossRef] [PubMed]
- 18. Naaz, F.; Dubey, H.K.; Kumari, C.; Lahiri, P. Structural and magnetic properties of MgFe2O4 nanopowder synthesized via co-precipitation route. *SN Appl. Sci.* **2020**, *2*, 808. [CrossRef]
- 19. Aliyan, N.; Mirkazemi, S.M.; Masoudpanah, S.M.; Akbari, S. The effect of post-calcination on cation distributions and magnetic properties of the coprecipitated MgFe₂O₄ nanoparticles. *Appl. Phys. A* **2017**, *123*, 446. [CrossRef]
- 20. Wang, Q.; Puerto, M.C.; Warudkar, S.; Buehler, J.; Biswal, S.L. Recyclable amine-functionalized magnetic nanoparticles for efficient demulsification of crude oil-in-water emulsions. *Environ. Sci. Water Res. Technol.* **2018**, *4*, 1553–1563. [CrossRef]
- 21. Oddo, E.; Pesce, R.M.; Derudi, M.; Magagnin, L. Amino-functionalized magnetic nanoparticles for CO2 capture. *Int. J. Smart Nano Mater.* **2021**, 12, 472–490. [CrossRef]
- 22. Sahoo, T.R.; Prelot, B. Adsorption processes for the removal of contaminants from wastewater: The perspective role of nanomaterials and nanotechnology. In *Nanomaterials for the Detection and Removal of Wastewater Pollutants*; Elsevier: Amsterdam, The Netherlands, 2020; pp. 161–222.
- 23. Huang, J.H.; Dong, J.; Liu, Z.L.; Liu, Y.P.; Wu, D.Y. Degradation of Dyes by H2O2 with Activated Charcoal Supported MgFe₂O₄ under Microwave Irradiation. *Adv. Mater. Res.* **2014**, 1004–1005, 972–977. [CrossRef]
- 24. Tran, C.V.; Quang, D.V.; Nguyen Thi, H.P.; Truong, T.N.; La, D.D. Effective Removal of Pb(II) from Aqueous Media by a New Design of Cu–Mg Binary Ferrite. *ACS Omega* **2020**, *5*, 7298–7306. [CrossRef] [PubMed]
- 25. Hussain, Z.; Sultan, N.; Ali, M.; Naz, M.Y.; AbdEl-Salam, N.M.; Ibrahim, K.A. Thermochemical conversion of waste glass and mollusk shells into an absorbent material for separation of direct blue 15 azo dye from industrial wastewater. *ACS Omega* **2020**, *5*, 18114–18122. [CrossRef]
- 26. Fan, C.; Li, K.; Li, J.; Ying, D.; Wang, Y.; Jia, J. Comparative and competitive adsorption of Pb (II) and Cu (II) using tetraethylene-pentamine modified chitosan/CoFe₂O₄ particles. *J. Hazard. Mater.* **2017**, 326, 211–220. [CrossRef] [PubMed]
- 27. Ren, Y.; Li, N.; Feng, J.; Luan, T.; Wen, Q.; Li, Z.; Zhang, M. Adsorption of Pb (II) and Cu (II) from aqueous solution on magnetic porous ferrospinel MnFe₂O₄. *J. Colloid Interface Sci.* **2012**, *367*, 415–421. [CrossRef] [PubMed]
- 28. Reddy, D.H.K.; Wei, W.; Shuo, L.; Song, M.H.; Yun, Y.S. Fabrication of Stable and Regenerable Amine Functionalized Magnetic Nanoparticles as a Potential Material for Pt(IV) Recovery from Acidic Solutions. *ACS Appl. Mater. Interfaces* **2017**, *9*, 18650–18659. [CrossRef] [PubMed]
- Duan, S.; Tang, R.; Xue, Z.; Zhang, X.; Zhao, Y.; Zhang, W.; Zhang, J.; Wang, B.; Zeng, S.; Sun, D. Effective removal of Pb(II) using magnetic Co0.6Fe2.4O4 micro-particles as the adsorbent: Synthesis and study on the kinetic and thermodynamic behaviors for its adsorption. Colloids Surf. A Physicochem. Eng. Asp. 2015, 469, 211–223. [CrossRef]
- 30. Tamez, C.; Hernandez, R.; Parsons, J.G. Removal of Cu (II) and Pb (II) from aqueous solution using engineered iron oxide nanoparticles. *Microchem. J.* **2016**, 125, 97–104. [CrossRef] [PubMed]

Materials **2022**, 15, 4009 28 of 28

31. Kalantari, K.; Ahmad, M.B.; Fard Masoumi, H.R.; Shameli, K.; Basri, M.; Khandanlou, R. Rapid and high capacity adsorption of heavy metals by Fe3O4/montmorillonite nanocomposite using response surface methodology: Preparation, characterization, optimization, equilibrium isotherms, and adsorption kinetics study. *J. Taiwan Inst. Chem. Eng.* **2015**, 49, 192–198. [CrossRef]

- 32. Mittal, A.; Ahmad, R.; Hasan, I. Poly (methyl methacrylate)-grafted alginate/Fe3O4 nanocomposite: Synthesis and its application for the removal of heavy metal ions. *Desalination Water Treat.* **2016**, *57*, 19820–19833. [CrossRef]
- 33. Lasheen, M.R.; El-Sherif, I.Y.; Tawfik, M.E.; El-Wakeel, S.T.; El-Shahat, M.F. Preparation and adsorption properties of nano magnetite chitosan films for heavy metal ions from aqueous solution. *Mater. Res. Bull.* **2016**, *80*, 344–350. [CrossRef]
- 34. Ren, Y.; Abbood, H.A.; He, F.; Peng, H.; Huang, K. Magnetic EDTA-modified chitosan/SiO₂/Fe₃O₄ adsorbent: Preparation, characterization, and application in heavy metal adsorption. *Chem. Eng. J.* **2013**, 226, 300–311. [CrossRef]
- 35. Venkateswarlu, S.; Yoon, M. Core–shell ferromagnetic nanorod based on amine polymer composite (Fe₃O₄@ DAPF) for fast removal of Pb (II) from aqueous solutions. *ACS Appl. Mater. Interfaces* **2015**, 7, 25362–25372. [CrossRef] [PubMed]
- 36. Zhu, S.; Yang, N.; Zhang, D. Poly (N, N-dimethylaminoethyl methacrylate) modification of activated carbon for copper ions removal. *Mater. Chem. Phys.* **2009**, 113, 784–789. [CrossRef]
- 37. Wang, J.; Zheng, S.; Shao, Y.; Liu, J.; Xu, Z.; Zhu, D. Amino-functionalized Fe₃O₄@ SiO₂ core–shell magnetic nanomaterial as a novel adsorbent for aqueous heavy metals removal. *J. Colloid Interface Sci.* **2010**, 349, 293–299. [CrossRef] [PubMed]