


 Cite this: *RSC Adv.*, 2022, 12, 24821

Heavy water recycling for producing deuterium compounds†

 Kazuhiro Akutsu-Suyama,^{ID}*^a Hironao Sajiki,^{ID}^b Misaki Ueda,^a Makiko Asamoto^c and Yasuyuki Tsutsumi*^c

Deuterium oxide (D₂O) is a special variety of water that serves as a crucial resource in a range of applications, but it is a costly and unusual resource. We therefore developed a new D₂O concentration system that combines a polymer electrolyte water electrolyzer and a catalytic combustor for recycling used D₂O. In this study, 1.6 L of used D₂O, with a concentration of 93.1%, was electrolyzed for 13.6 h to obtain 0.62 L of D₂O, with a concentration of 99.3%. In addition, the recombined water obtained by burning electrolytic gas using the catalytic combustor was also electrolyzed for 8.8 h to obtain 0.22 L of D₂O, with a concentration of 99.0%. The estimated separation factor of this electrolyzer at 25 °C was 3.6, which is very close to the equilibrium constant of the water/hydrogen isotope exchange reaction. Recycled D₂O was used as a deuterium source for the deuteration reaction of sodium octanoate, and 93.6% deuterated sodium octanoate was obtained. It is concluded that there were no impurities in the recycled D₂O that interfered with the deuteration reaction. These results can lead to the development of a cost-effective deuteration method for these materials.

 Received 15th July 2022
 Accepted 23rd August 2022

DOI: 10.1039/d2ra04369f

rsc.li/rsc-advances

Introduction

Deuterium-labeled compounds have been used to elucidate reaction mechanisms and/or kinetics, drug metabolism analysis, *etc.*^{1–3} Recently, deuterium-labeled compounds have been used not only in analytical reagents but also in novel industrial materials such as surface-deuterated silicon semiconductors^{4,5} and deuterated organic electro-luminescence elements.^{6,7} In addition, since the Food and Drug Administration recently approved deutetrabenazine (Austedo®) as a deuterated medicine,⁸ there has been a growing interest in deuterium-labeled compounds among pharmaceutical companies. In neutron studies, partially or fully deuterated compounds have been used to control the neutron scattering contrast of organic molecules and/or reduce the neutron incoherent scattering background of hydrogen.^{9,10}

Deuterium labeling reactions are usually carried out using deuterium oxide (D₂O) as a deuterium source in the presence of protonated organic molecules and carbon-supported platinum-group metals, which serve as a catalyst.^{9–18} When the

deuteration reaction has proceeded sufficiently, the concentration of deuterium in D₂O decreases with increasing deuteration level of organic molecules. Recently, a deuterium labeling reaction using heavy water as a deuterium source and using a continuous flow reactor has also been reported.^{19,20} Since efficiently recycling used D₂O from the reaction mixture is extremely difficult, the used D₂O is disposed as industrial waste. However, depending on the amount of D₂O used, that is, the demand for deuterium-labeled compounds, the recycling method of used D₂O shown in Fig. 1 can have significant economic benefits.

This study aims to develop a new D₂O recycling system for the production of deuterium compounds and to investigate the problems in its practical use. High purity D₂O was first produced by electrolysis in 1933. In the 1960s, many studies

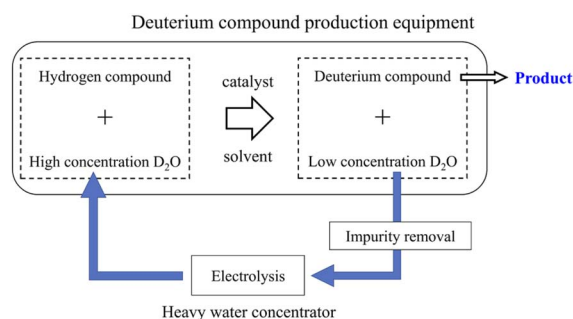


Fig. 1 Heavy water recycling for the production of deuterium compounds.

^aNeutron Science and Technology Center, Comprehensive Research Organization for Science and Society (CROSS), Tokai, Ibaraki 319-1106, Japan. E-mail: k_akutsu@corss.or.jp

^bLaboratory of Organic Chemistry, Gifu Pharmaceutical University, Daigaku-nishi, Gifu 501-1196, Japan

^cFC Development, Co., Ltd, N5, Ibaraki University, 4-12-1 Nakanarusawacho, Hitachi-shi, Ibaraki 316-8511, Japan

† Electronic supplementary information (ESI) available. See <https://doi.org/10.1039/d2ra04369f>



Table 1 Comparison between conventional equipment and new equipment to be developed

	Conventional equipment	New equipment to be developed
Name	Fugen D ₂ O purification equipment	2 L per day D ₂ O concentrator
Intended use	Purification of D ₂ O used as a moderator in nuclear reactors	D ₂ O recycling for producing deuterium compounds
Electrolyser	Non-diaphragm alkaline electrolytic cell, current density 0.1 A cm ⁻² , separation factor 10.5	PEM type electrolytic cell. Current density 2 A cm ⁻²
Recombiner	Catalytic combustor with helium gas circulation system	PEFC or heat sink type catalytic combustor without gas circulation system
Treated D ₂ O	15 L per day. Standard D ₂ O concentration 95%	2 L per day. Standard D ₂ O concentration 95%
Equipment size	14 m × 20 m × 10 m	Standard rack storage size

were conducted on hydrogen isotope exchange reactions on electrodes.^{21–24} However, research on hydrogen isotope exchange reactions with polymer electrolyte water electrolyzers (PEWEs) capable of high current density operation has only recently begun.^{25–28}

The D₂O production method used in the Manhattan project was published in 1954, and since then many studies on industrial production methods of D₂O have been reported.²⁹ There are many methods for extracting high concentrations of D₂O from natural water, which contains approximately 140 ppm of D₂O, such as electrolysis, distillation, deep cold separation, water–hydrogen sulfide, and hydrogen–ammonia exchange reaction.

The electrolysis approach is inefficient since it uses a lot of energy even if isotope separation is easy.³⁰ On the other hand, the energy consumption for electrolysis becomes small for recycling used D₂O because the hydrogen concentration level is also small in the used D₂O. Therefore, electrolysis is not always uneconomical. D₂O recycling using the electrolytic method has been carried out for nuclear power and fusion.^{31–33} Table 1 contrasts the existing Fugen D₂O purification equipment with the new equipment that is being developed. In the D₂O purification equipment for the Fugen nuclear power station,^{31,32} an alkaline electrolytic bath without a partition membrane was used as the water electrolyzer. The generated electrolytic gas was diluted with helium gas and recombined using a catalytic combustor to recover deuterium in the electrolytic gas as dilute D₂O. In addition to the electrolyzer and combustor, a helium gas circulation system, a distiller for removing electrolytic aids in the electrolytic solution, and radiation control equipment were used. On the other hand, a new D₂O concentrator to be developed handles a smaller amount of D₂O than that used in the nuclear power and fusion fields. It does not handle radioactive substances; hence, it is required to be small, simple, and inexpensive rather than highly efficient.

The new D₂O concentrator uses a PEM (polymer electrolyte membrane)-type electrolysis cell that can operate at high current densities, making the electrolyzer much smaller and

less expensive. The new D₂O concentrator uses a PEFC (polymer electrolyte fuel cell) or heat sink type catalytic combustor as a recombiner, omitting the helium gas circulation system and greatly simplifying and miniaturizing the equipment.

In this study, the concentration characteristics of the concentrator were compared with the calculated values based on the law of conservation of substances and discussed quantitatively. In addition, deuteration experiments were carried out to check the quality of the recycled D₂O obtained using the D₂O concentrator. As fatty acids are one of the most interesting research areas for materials and life science researchers, developing a cost-effective deuteration method for these materials is an important step for the future application of deuterium labeling technologies. In this study, sodium octanoate was deuterated as the target material.

Experimental

Materials

Unless otherwise noted, materials obtained from commercial suppliers were used without further purification. Twice-distilled water was used in all the experiments. IrO₂ catalyst (IrO₂ black, 100%, 1.0 mg cm⁻², Umicore AG & Co. KG), Pt/C catalyst (Pt 50 wt%, Pt 0.5 mg cm⁻², NE Chemcat Co), Nafion NR212 and N117 membranes (50 μm and 180 μm thick, DuPont Inc), Ti porous substrate (200 μm thick, Bekaert Inc), sodium octanoate (99.0%, TCI Chemical Co), 1,4-dioxane (99.0%, TCI Chemical Co), deuterium oxide (D₂O, 99.9% D, Cambridge Isotope Laboratories Inc.), and Pt/C for deuteration (10.0%, NE Chemcat Co.). A PEFC, PEWE, and catalytic combustor were supplied by FC Development, Co., Ltd.

Preliminary test equipment

As a recombiner for 2 L per day concentrator, two types of equipment, PEFC and heat sink type catalytic combustor, were examined. Preliminary test equipment means equipment that uses PEFC as a recombiner. Fig. 2(A) shows a schematic diagram of a D₂O concentrator that combines a PEWE and

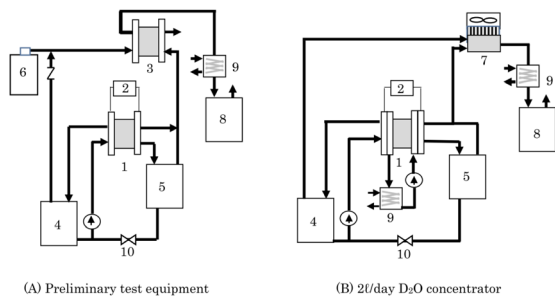


Fig. 2 Schematic illustration of the heavy water concentrator of the preliminary test equipment (A) and the 2 L d⁻¹ D₂O concentrator (B). (1) PEWE, (2) power supply, (3) PEFC, (4) anode water tank, (5) cathode water tank, (6) air cylinder, (7) catalytic combustor, (8) recombined water tank, (9) chiller, (10) valve.

PEFC used in the preliminary test. Because high isotope separation efficiency has been reportedly expected by a method called combined electrolysis fuel cell (CEFC),^{34–37} it was investigated using the equipment in Fig. 2(A) to determine whether the method is suitable for the D₂O recycling concentrator. For D₂O concentration, there are volume reduction electrolysis methods or constant volume electrolysis methods.²⁹ This concentrator was also used to validate the D₂O concentration method.

The PEWE 1 used in this concentrator was a single cell with an electrode area of 4.18 cm² or a 3 cell stack that uses single cells with the same electrode area. In this PEWE, anode catalysts of IrO₂ (1 mg cm⁻²), cathode catalysts of Pt/C (0.5 mg cm⁻²), an electrolyte membrane of N117, a Pt-plated Ti porous anode gas diffusion layer, a water-repellent carbon paper cathode gas diffusion layer, and Pt-plated Ti flow plates were used. The PEFC 3 used in this concentrator was a single cell with an electrode area of 25 cm². The amount of Pt load on each electrode was 0.5 mg cm⁻², and an electrolyte membrane of NR12 was used.

Instead of taking used D₂O, D₂O obtained by diluting 99% D₂O with ion-exchanged water was used in the preliminary test. Raw D₂O (100 g) was put in anode water tank 4 and circulated to the PEWE 1 anode at a flow rate of 5 mL min⁻¹ for a single cell and 15 mL min⁻¹ for a 3 cell stack. The oxygen generated at the anode of PEWE 1 was supplied to the cathode of PEFC 3 together with air (92 mL min⁻¹ in a single-cell test and 276 mL min⁻¹ in a 3 cell stack test) from the cylinder. The cathode exhaust gas was cooled by chiller 9, and the recombined water was collected in the recombined water tank 8.

No gas or liquid was supplied to the cathode of PEWE 1, and the hydrogen generated at the cathode was supplied to the anode of PEFC 3, and the exhaust gas from the anode outlet was released to the atmosphere. The water that passed through the electrolyte membrane from the PEWE anode to the cathode was stored in the cathode water tank 5. The operating current of the PEWE was constant at 8.36 A (2 A cm⁻²), and the cell temperature was stable at 35 °C for a single cell and 42 °C for a 3 cell stack. Electrolysis was continued, and when anode water tank 4 started emptying, the lower valve 10 was opened, and the water accumulated in the cathode water tank 5 was returned to the anode water tank 4. Electrolysis was continued until the target

time. Immediately after returning the cathode water to the anode tank, 5 mL of D₂O in the anode tank was sampled, and its deuterium concentration was analyzed using an FT-IR spectrometer.

Because the PEFC must keep the electrolyte membrane wet, it is usually operated by supplying a humidified gas. It is desirable to humidify the recombined water in tank 8 so that the concentration of D₂O does not change because of the mixing of humidified water. However, there was no recombined water at the start of the operation. Therefore, in this study, the non-humidifying operation lowered the cell temperature and suppressed the release of water vapor. An electronic load device was connected to the PEFC, and a constant current operation of 5 A (0.2 A cm⁻²) was performed for the PEWE single cell and 10 A (0.4 A cm⁻²) for the PEWE 3 cell stack. The hydrogen and oxygen utilization rates were 60% and 36% for the PEFC in the single-cell test, and 40% and 24% for the PEFC in the 3 cell stack test, respectively.

2 L per day D₂O concentrator using heat sink type catalytic combustor for recombiner


Fig. 2(B) shows a schematic diagram of a 2 L per day D₂O concentrator in which PEWE 1 and catalytic combustor 7 are combined. This is a small, simple, and inexpensive concentrator newly developed for D₂O recycling and used to produce deuterium compounds. Here, 2 L per day means the ability to concentrate 2 L of 95% D₂O to 99% within 24 h.

Using PEWE 1 with a separation membrane instead of an alkaline electrolytic bath without a separation membrane, the generated oxygen and hydrogen were separated, and helium dilution was not necessary. Hydrogen and oxygen generated by electrolysis are directly supplied to the catalytic combustor without dilution and burned, simplifying the concentrator. Unlike the alkaline electrolytic bath, the PEWE does not require the addition of an electrolyte; therefore, a distiller for removing the added electrolyte is not necessary.

Further simplification of the concentrator is possible by using only PEWE and excluding the catalytic combustor. However, it is necessary to re-electrolyze the recombined water to increase the recovery rate of the high-concentration D₂O; therefore, the concentrator was equipped with a catalytic combustor.

Fig. 2(B) shows a concentrator that performs batch operations. Multi-stage electrolysis is required for continuous operation, which is extremely complicated³⁸ and unsuitable for inexpensive concentrators. To improve the separation efficiency, a method called combined electrolysis catalytic exchange (CECE) that recovers deuterium in electrolyzed hydrogen gas with raw water is also reported.³⁴ However, in a small-scale concentrator, it is desirable to simplify the system and reduce the initial cost of the concentrator rather than increasing the separation efficiency to shorten the operation time and reducing the running cost.

We chose the concentrator shown in Fig. 2(B), which consisted of an electrolyzer and a catalytic combustor. PEWE 1 used in this concentrator for the reasons mentioned above, in which

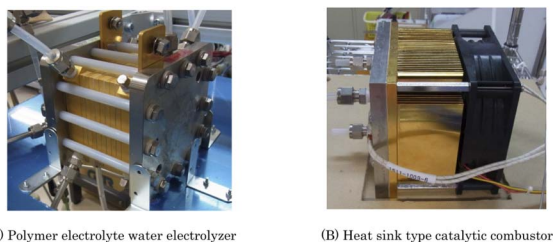

(A) Polymer electrolyte water electrolyzer

(B) Heat sink type catalytic combustor

Fig. 3 Photograph of the main components of the 2 L per day heavy water concentrator. (A) and (B) are the PEWE and the heat sink type catalytic combustor, respectively.

four cells with an electrode area of 25 cm² were stacked, and the external photograph is shown in Fig. 3(A). The materials for the electrodes, electrolyte membrane, flow plate, etc., used for this stack are the same as those used for the PEWE in the preliminary test. The cooling water was circulated, and the cell temperature was kept constant at 25 °C.

A newly developed heat sink-type catalytic combustor was used as the catalytic combustor 7. In this combustor, a substrate carrying a combustion catalyst with an area of 67 cm² was mounted onto the hot plate of the heat sink. The heat of combustion was released into the atmosphere *via* heat radiation fins attached to the hot plate. The fan was controlled to maintain a constant combustion temperature of 120 °C. An external photograph of the catalytic combustor is shown in Fig. 3(B).

Using this concentrator, a demonstration test of D₂O recycling was conducted, in which D₂O with a reduced concentration used in the production of deuterium compounds was concentrated and reused. Used D₂O (1.61 L) was purified by distillation under reduced pressure, and it was placed in an anode water tank, circulated at 50 mL min⁻¹, and concentrated by electrolysis at 50 A (2 A cm⁻²). Valve 10 was automatically opened and closed to return the water in cathode tank 5 to anode tank 4.

Purification of used D₂O

Because the used D₂O solution, which was used to deuterate sodium octanoate, may contain some impurities (*e.g.*, sodium octanoate, catalyst, and metal ions that were eluted from the stainless steel reactor), these impurities were removed from the used D₂O solution before recycling.

For the separation of these molecules from D₂O, distillation is the best and most commonly used separation method. Therefore, a 500 mL round-bottom flask connected to a glass Liebig condenser was used with cooling water at 10 °C to purify the used D₂O.

Analysis of H and D concentrations

Because the estimation of the ratio of the two isotopes, that is, H and D atoms in used and recycled D₂O is crucial for estimating the efficiency of the D₂O recycling system, infrared (IR) spectroscopy was used to analyze H and D concentrations in the presence of H₂O and D₂O. IR spectroscopy is a general method used to estimate H and D concentrations.³⁹

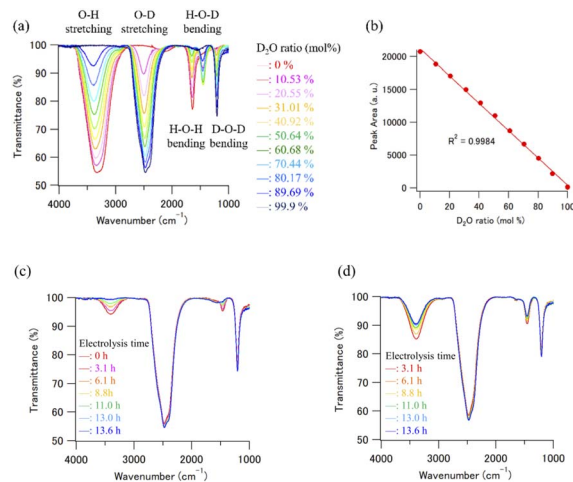


Fig. 4 (a) The calibration data set of H₂O–D₂O mixtures obtained by FT-IR ATR. (b) The plot of the peak area of O–H stretching region vs. the initial concentration ratio of D₂O/H₂O mixture. The error bars are small enough to be within the symbols. (c) The FT-IR ATR spectra of the D₂O and D₂O concentrated samples. (d) The FT-IR ATR spectra of recombined D₂O samples.

Fourier transform infrared (FT-IR) spectra were measured using an FT/IR-4100ST (Nihon Bunko Co. Ltd, Tokyo, Japan) system equipped with an attenuated total reflectance (ATR) unit (PRO670H-S, Nihon Bunko Co. Ltd, Tokyo, Japan). The wavenumber range and resolution were 700–4000 and 4 cm⁻¹, respectively. Each spectrum was determined from an average of four scans, and all measurements were performed at ambient temperature (20 °C). Fifteen microliters of D₂O solution were placed on the ZnSe crystal of the ATR unit for measurements, and all FT-IR spectra measurements were completed within 30 s, because a certain degree of H₂O contamination from the air clearly occurred after 60 s on the ZnSe crystal. The concentration of D in the D₂O sample solutions was determined from a calibration curve prepared using the peak area of the O–H stretching region. Fig. 4(a) shows the calibration data set of the H₂O–D₂O mixtures obtained by FT-IR ATR. The intensity of the O–H stretching absorption peak decreased with increasing D₂O concentration in the D₂O/H₂O mixture. The plot of the peak area of the O–H stretching region vs. the initial concentration ratio of the D₂O/H₂O mixture, which was determined by the mixing weight of the D₂O/H₂O mixture, was well matched ($R^2 = 0.9984$, Fig. 4(b)). We prepared some calibration curves which were obtained by plotting the integral of the peak at the O–H stretching band and the O–D stretching band (Fig. S1†). As a result, we concluded that the calibration curve obtained by plotting the integral of the peak at the O–H stretching band is the best to calculate the deuterium concentration of the D₂O samples. Therefore, the calibration curve obtained using the linear regression method was used to estimate the D₂O concentration of the recycled D₂O samples (Fig. 4(c) and (d)). Note that the obtained standard deviation for three consecutive experiments was 0.068 (Fig. S2 and Table S1†). Therefore, it can be said that this analytical method has high reproducibility for the purity analysis of D₂O samples.

Direct deuteration of sodium octanoate

Deuteration reactions were carried out in a stainless steel reactor (TSSR, TPR1-VSI-300, SUS316, Taiatsu Techno Corp., Tokyo, Japan).⁴⁰

A mixture of sodium octanoate-*h*₁₅ (5.0 g, 30.1 mmol) and Pt/C (10% Pt, 0.65 g, 0.33 mmol) in new or recycled D₂O (100 mL) was loaded into the TSSR. The mixture was vacuum degassed for 10 min to remove oxygen. The reactor was purged with H₂ for 10 s and then sealed. The mixture was heated at 220 °C in an oil bath and stirred continuously for 72 h. After cooling to 20 °C, the contents were filtered through a short plug of Celite to remove the catalyst and washed a second time with H₂O (50 mL). The filtrate was evaporated to dryness under reduced pressure. The yields of deuterated sodium octanoate using the new and recycled D₂O solutions were 85.9% and 90.7%, respectively. The deuteration ratio was determined by ¹H NMR spectroscopy using D₂O, with 1,4-dioxane as an internal standard, and ²H NMR spectroscopy using H₂O. The ¹H and ²H spectra were recorded on a BRUKER AVANCE III 400 spectrometer and a JEOL JMTC-400/54/JJ/YH spectrometer (¹H: 400 MHz, ²H: 61.4 MHz).

Results and discussion

Preliminary test – PEWE and PEFC cell voltages

Fig. 5(A) and (B) show the cell voltages of PEWE and PEFC during the combined operation of a PEWE single cell at 8.36 A and PEFC at 5 A using the preliminary test equipment, respectively. The H₂O line in Fig. 5(A) was obtained using ion-exchanged water before the D₂O test. In the H₂O electrolysis characteristics of Fig. 5(A), the cell voltage is 1.8 V at 2 A cm⁻², indicating PEWE with normal characteristics. The PEFC in Fig. 5(B) also shows a normal characteristic of 0.75 V at 0.2 A cm⁻².

The initial concentration of D₂O used in the test was 95%. The D₂O 1st line in Fig. 5(A) was the test result obtained until the amount of D₂O initially put into the anode was almost empty. The D₂O 2nd and 3rd lines represent the second and third operations, respectively, after moving water from the cathode water tank to the anode water tank. Because the amount of water decreased during electrolysis, the electrolysis time was shortened from 4.0 h for the first cycle to 2.8 h for the second cycle and 1.7 h for the third cycle. The cell voltage of H₂O was kept constant at 1.9 V, and the cell voltage of D₂O was kept constant at 2 V with almost the same data for 1st, 2nd, and 3rd operations. D₂O is more difficult to electrolyze than H₂O with 0.1 V.

The cell voltage of PEFC shown in Fig. 5(B) was approximately 0.76 V, but a pulse-like cell voltage drop was occasionally observed. Despite the non-humidifying operation, the cell temperature was as low as 32–34 °C; hence, it is presumed that water droplets accumulated in the gas channel, and a pulsed cell voltage drop occurred.

The appearance of the pulse-shaped voltage drop suggests that stable operation will be difficult if the current is increased any further. Fig. 5 recombines the gas generated by electrolysis

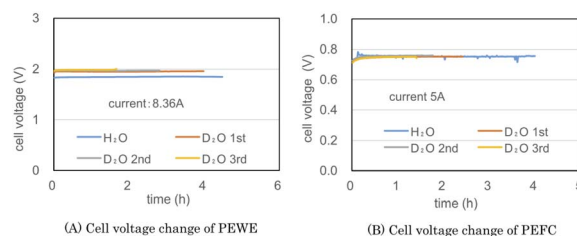


Fig. 5 The cell voltages of PEWE (A) and PEFC (B) during the combined operation of a PEWE single cell at 8.36 A and PEFC at 5 A using the preliminary test equipment. The blue lines are the test result obtained using ion-exchanged water. The red, gray, and yellow lines result from the first, second, and third operations using D₂O, respectively.

at 8.36 A at 5 A. Hydrogen utilization rate is very low. Since hydrogen containing a large amount of deuterium is discarded, it is in an unfavorable state for a heavy water concentrator.

Preliminary test – D₂O concentration characteristics

Fig. 6 shows the change in D₂O concentration in the anode water tank during combined operation with a 8.36 A 3 cell stack PEWE and a PEFC single-cell 10 A in the preliminary test equipment. D₂O with concentrations of 71.7%, 81.8%, and 92.4% were prepared by diluting commercial D₂O (99.9%) with ion-exchanged water. The electrolysis ratio on the horizontal axis represents the ratio of electrolyzed water moles to raw water. The moles of raw water were calculated from the weight and D₂O concentration of raw water. The moles of electrolyzed water were calculated from the current, the number of stacked cells in the stack, and the electrolysis time. When electrolyzed to an electrolysis ratio of approximately 0.6, the D₂O concentration increased from 71.7% to 89.9%, 81.8% to 95.6%, and 92.4% to 98.7%, respectively.

The time on the horizontal axis shows the electrolysis time of D₂O with an initial concentration of 71.7%. The first, second, third, and ninth times were 110 min, 180 min, 234 min, and 376 min, respectively, when the anode water tank was almost empty, and water was moved from the cathode water tank to the anode water tank. Because the amount of water decreased with electrolysis, the time pitch for moving water gradually

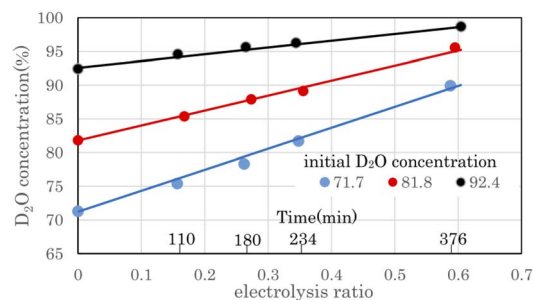


Fig. 6 D₂O concentration change by electrolysis using the preliminary test equipment. D₂O concentration values determine the filled circles, and solid lines are calculated using the volume reduction electrolysis formula. The error bars are small enough to be within the symbols.

decreased. Fig. 6 shows that the D₂O concentration increased as water decreased owing to electrolysis. This concentration method is called the volume-reduction electrolysis method. The graph shown in black (●) in Fig. 6 is the measured value, and the solid line close to the straight line is the calculated value using the volume reduction electrolysis formula.³⁰ The measured value of the initial D₂O concentration and the separation coefficient of 2.9 was used in the calculation.

The separation coefficient α is defined by the following equation.³⁰

$$\frac{[\text{D}_2\text{O}]}{[\text{H}_2\text{O}]} = \alpha \frac{[\text{D}_2]}{[\text{H}_2]} \quad (1)$$

Here, [D₂O] indicates the concentration of each component molecule. When there are no impurities other than D, the relationship between the D₂O concentration P and the deuterium gas concentration P' can be expressed by eqn (2).

$$\frac{P}{1-P} = \alpha \frac{P'}{1-P'} \quad (2)$$

The formula for the volume reduction electrolysis is as follows.³⁰

$$\alpha \log\left(\frac{P}{P_0}\right) + \log\left(\frac{1-P_0}{1-P}\right) = -(\alpha-1)\log\left(1 - \frac{\Delta M}{M_0}\right) \quad (3)$$

Here, P_0 is the initial D₂O concentration, and $\Delta M/M_0$ is the electrolysis ratio. M_0 is the number of moles of initial water, and ΔM is the number of moles of electrolyzed water. This equation was derived based on the law of conservation of substances in the volume reduction electrolysis process for an electrolyzer without a membrane between the anode and cathode. Therefore, the calculated solid line in Fig. 6 is compared with the measured value in the state where the waters of the anode and cathode were mixed. An equation describing the concentration characteristics of an electrolyzer with a membrane that separates the anode and cathode has not yet been reported. Using eqn (3), the D₂O concentration was calculated by changing the separation coefficient (α) and comparing it with the measured values. As a result, a good agreement was obtained, as shown in Fig. 6, when $\alpha = 2.9$. Considering that the measured values of D₂O concentration at 12 points excluding the initial D₂O concentration are almost equal to the calculated values at only one value of $\alpha = 2.9$ means that eqn (3) is useful for predicting electrolytic concentration characteristics.

As shown in Fig. 6, the D₂O concentration increased continuously with electrolysis. However, the D₂O concentrations of the cathode and anode waters during electrolysis were known to be almost constant,^{25,27} and they changed stepwise as water was transferred from the cathode tank to the anode tank.

Preliminary test – recombination of electrolytic gas by PEFC

To adopt PEFC as an electrolytic gas recombination device for D₂O recycling, the following issues must be resolved.

(1) **Improvement of air line.** PEFCs are difficult to operate with a high oxygen utilization rate exceeding 60%. Therefore, the dry air of cylinder 6 was added, as shown in Fig. 2(A). D₂O recycling concentrators produced high concentrations of D₂O. When using air from the atmosphere, it is necessary to dry the air to an extremely low dew point to prevent a decrease in the D₂O concentration.

(2) **Hydrogen utilization.** In D₂O recycling, high-concentration D₂O is electrolyzed, so the concentration of deuterium in the electrolytic gas is also high. A low hydrogen utilization rate leads to a decrease in the recovery rate of recombined water. The hydrogen utilization rate must be 90% or higher. However, as mentioned above, it is difficult to stably operate a PEFC at a high hydrogen utilization rate.

(3) **Non-humidifying operation.** At startup, insufficient concentration of D₂O is available for humidification. PEFCs capable of operating under non-humidifying conditions are required.

The CEFC method is not suitable for D₂O recycling, which requires high concentrations of D₂O. Therefore, in the 2 L per day D₂O concentrator, we have developed a new system that uses a catalytic combustor that directly burns the electrolytic gas without mixing other gases instead of PEFC. Moreover, it should be noted that this equipment has already repeated the heavy water concentration cycle for 350 hours and continues to operate stably.

D₂O concentration characteristics using 2 L per day D₂O concentrator

Fig. 7 shows the change in D₂O concentration in the test in which 1.6 L of used D₂O with an initial concentration of 93.1% was concentrated using the 2 L per day D₂O concentrator. ● is the concentration in the anode water tank for the PEWE, and ○ is the D₂O concentration in the recombined water tank for the catalytic combustor.

The solid line is the D₂O concentration (P) calculated by substituting the measured initial concentration (P_0) (93.1%) and the separation coefficient ($\alpha = 3.6$) into the volume reduction electrolysis formula in eqn (3). When the separation

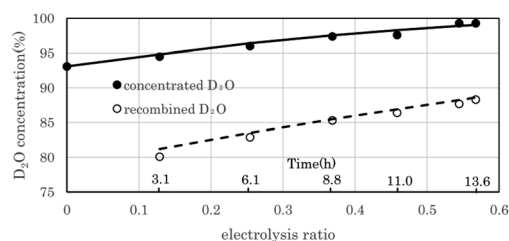


Fig. 7 Performance of 2 L per day D₂O concentrator. The filled circles represent experimentally determined D₂O concentration values obtained using the 2 L per day D₂O concentrator. The solid line represents the D₂O concentration calculated using the separation coefficient α (3.6). The open circles represent experimentally determined D₂O concentration values of the recombined water in the tank, and the dotted line represent calculated recombined D₂O concentration. The error bars are small enough to be within the symbols.

coefficient was 3.6, the measured values were almost on the calculated curve, as shown in Fig. 7. The dotted line represents the calculated recombined water concentration obtained, assuming that the initial D₂O is divided into concentrated and recombined water. The measured concentration of the recombined water (○) in Fig. 7 was almost on the calculated dotted line. This is a reasonable result because it is based on the law of conservation of substances. The separation coefficient of 3.6 in Fig. 7 was significantly larger than the separation coefficient of 2.9 in Fig. 6. One of the reasons for this difference was the difference in operating temperature. The PEWE cell temperature in Fig. 6 was 42 °C, whereas that in Fig. 7 was set to 25 °C. It is well known that the separation coefficient increases as the operating temperature decreases.^{22,41,42} The equilibrium constant (K) of the isotope exchange reaction of the following equation on the catalyst was 3.62 at 25 °C and 3.20 at 50 °C.³⁰



$$K = \frac{[\text{HDO}][\text{H}_2]}{[\text{H}_2\text{O}][\text{HD}]} \quad (5)$$

The separation coefficient of 3.6 in Fig. 7 is close to the equilibrium constant of 3.62 in eqn (4). However, the separation coefficient of 2.9 (in Fig. 6) is smaller than the equilibrium constant of 3.2 at 50 °C.

As the amount of raw water used for the experiment (in Fig. 6) is as small as 100 g, it may be owing to the influence of H₂O contamination from the atmosphere.

Recombination of electrolytic gas using a heat sink type catalytic combustor

Fig. 8 shows the measured combustion rate of the heat sink-type catalytic combustor used in the 2 L per day D₂O concentrator. The flow rate of the electrolytic gas supplied to the catalytic combustor was changed by changing the PEWE current. The combustion rate on the vertical axis represents the ratio of the burned gas to the supplied gas. The exhaust gas from combustor 7 was dehumidified through chiller 9 using the concentrator shown in Fig. 2(B), and the exhaust gas flow rate of the recombined water tank 8 was measured and used as the flow rate of the unburned gas. As shown in Fig. 8, at a rated current

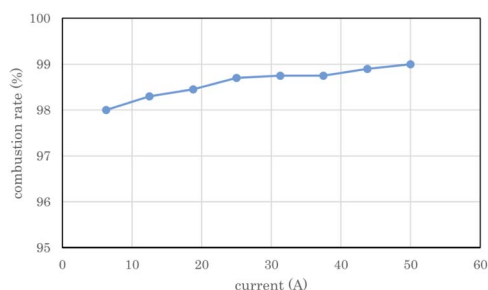


Fig. 8 Combustion rate of heat sink-type catalyst combustor for 2 L per day heavy water concentrator. The error bars are small enough to be within the symbols.

of 50 A for the PEWE, the combustion rate of the combustor was 99%, which was high enough for practical use.

Re-electrolysis of recombined water

To increase the recovery rate of D₂O, 88.3% of the recombined water recovered in the test (shown in Fig. 7) was further electrolyzed to a D₂O concentration of 99% or higher. The measured results are presented in Table 2.

In the first 13.6 h of electrolysis, 1.61 L of 93.1% used D₂O was separated into 0.62 L of 99.3% concentrated D₂O-1 and 0.86 L of 88.3% recombined D₂O-1. The recovery rate of D₂O with a concentration of 99% or more with respect to that of the used D₂O was 38.5%. When the recombined water D₂O-1 was electrolyzed for 8.8 h, 0.22 L of 99% concentrated D₂O-2 was obtained, and the total amount of D₂O with a concentration of 99% or more at a total electrolysis time of 22.4 h was 0.84 L, and the recovery rate relative to the used D₂O increased to 52.2%. From 1.61 L of used D₂O, a total of 1.4 L of concentrated D₂O-1 (0.62 L), concentrated D₂O-2 (0.22 L), and recombined D₂O-2 (0.56 L) was obtained, and 0.21 L was missing. The theoretical column in Table 2 lists the calculated values of the electrochemical equivalents. The measured volumes of concentrated D₂O-1 and concentrated D₂O-2 were 88.6% and 81.5% of the theoretical volume, respectively. The main reason for such low ratios is the sampling loss of D₂O in concentration measurements. However, the measured theoretical ratios of the recombined D₂O-1 and recombined D₂O-2 were 94.5% and 94.9%, respectively, which were lower than the 99% predicted from the measured exhaust gas flow rate in Fig. 8. It is obvious that these values were sufficiently high for practical use.

Evaluation of new D₂O concentrator

(1) **D₂O recovery.** Using the D₂O concentrator, 0.84 L of D₂O with a concentration of >99% was recovered from the 1.6 L of D₂O with a concentration of 93.1% that was previously discarded. This method is very useful because the production of high-concentration heavy water from natural water is extremely difficult and consumes a large amount of energy.

(2) **Energy consumption.** The rated electrolytic power of the electrolyzer is 500 W. The power for cooling of this electrolyzer and recombiner is 1.3 kW and 400 W, respectively. Since the total power of the concentrator is 2.2 kW, it consumes 49.3 kW h of energy in 22.4 hours of operation. Therefore, the electricity cost required for the tests in Table 1 was around \$11; see the ESI† details. Considering that D₂O costs around \$1000 per liter, electricity costs are negligibly low.

(3) **Equipment durability.** A key factor affecting the economics of this system is the durability of the equipment. The deterioration rate of the PEM type water electrolysis cell is 0.2 mV or less at 1000 h,^{44,45} and durability of 10 000 h or more is expected. There is also a report demonstrating 40 000 h operation.⁴⁶ On the other hand, there are no reports on the durability of D₂O concentrators. This equipment has already repeated the D₂O concentration cycle for 350 hours and continues to operate stably. It is necessary to continue to operate this equipment and confirm its durability.

Table 2 Recovery of concentrated D₂O from used D₂O^a

Electrolysis condition	Sample name	C (%)	Sample volume (L)	
			Measured	Theoretical
Initial	Used D ₂ O	93.1	1.61	—
After 13.6 h electrolysis of used D ₂ O	Concentrated D ₂ O-1	99.3	0.62	0.70
	Recombined D ₂ O-1	88.3	0.86	0.91
After 8.8 h electrolysis of recombined D ₂ O-1	Concentrated D ₂ O-2	99.0	0.22	0.27
	Recombined D ₂ O-2	83.6	0.56	0.59

^a C: deuterium concentration of the sample.

Deuteration of sodium octanoate using new and recycled D₂O

To check the quality of recycled D₂O, comparative deuteration experiments were carried out using new (99.9%) and recycled (99.3%) D₂O.

Fig. S2† shows the ¹H and ²H NMR spectra of deuterated sodium octanoates. The deuteration efficiency was evaluated using ¹H and ²H NMR spectroscopy, and the respective spectra were recorded. The estimated mean deuteration levels of sodium octanoate obtained using the new and recycled D₂O were 94.7 and 93.6%, respectively. Although recycled D₂O was used as a deuterium source for the deuteration reaction, the deuteration efficiency did not change significantly. This indicated that the recycled D₂O did not contain any deuteration reaction inhibitors, that is, we were able to utilize the recycled D₂O in the deuteration reaction. In addition, because the mean deuteration level of saturated fatty acids using the direct deuteration method was 94–98%, the obtained deuteration levels are consistent with those reported in the literature (ref. 10 and 43). Therefore, it is clear that there is no significant difference between the new and recycled D₂O in the overall deuteration efficiency of the reaction.

Conclusions

Recently, various deuterium-labeled compounds have been developed for new applications, and their demand is increasing. High concentrations of D₂O were used to produce them, and used D₂O, whose concentration decreased during the production process, was discarded as industrial waste. The purpose of this study is to enable the reconcentration and reuse of this used D₂O. A PEWE was used for concentration, and the formula for substance preservation was able to describe its concentration characteristics. The recombination of electrolyzed gas is required to increase the amount of D₂O recovered. The method of using fuel cells for recombination is not suitable for producing high concentrations of D₂O.

In this study, we developed a new simple D₂O concentrator that combines a 4-cell stack PEWE with an electrode area of 25 cm² and a heat sink-type catalytic combustor for recombination. The D₂O recycling test was conducted for the production of deuterated sodium octanoate using this concentrator.

Used D₂O (1.6 L) with a final concentration of 93.1% after removing impurities by distillation was electrolyzed for 13.6 h to

obtain 0.62 L of D₂O with a concentration of 99.3%. The estimated separation factor of this electrolyzer at 25 °C was 3.6, which is very close to the equilibrium constant of the water/hydrogen isotope exchange reaction. By further electrolyzing the recombined water obtained by burning electrolytic gas with a catalytic combustor for 8.8 h, 0.22 L of 99% D₂O was obtained.

It was confirmed that the deuteration levels of sodium octanoate obtained using the new and used D₂O were almost the same. There were no impurities in the recovered D₂O that interfered with the deuteration reaction. With an increasing demand for deuterium compounds, the need for D₂O recycling in the production process is expected to increase.

Author contributions

Conceptualization, K. A.-S., H. S., and Y. T.; data curation, K. A.-S., M. U., and Y. T.; formal analysis, K. A.-S., M. U., and Y. T.; funding acquisition, Y. T.; investigation, K. A.-S., M. U., M. A., and Y. T.; methodology, K. A.-S., H. S., and Y. T.; project administration, K. A.-S., H. S., and Y. T.; resources, K. A.-S. and Y. T.; software, K. A.-S.; supervision, H. S. and Y. T.; validation, K. A.-S., M. A., and Y. T.; visualization, K. A.-S. and Y. T.; writing – original draft, K. A.-S. and Y. T.; writing – review & editing, K. A.-S., H. S., M. U., M. A., and Y. T. All authors have read and agreed to the published version of the manuscript.

Conflicts of interest

The authors declare no competing financial interest.

Acknowledgements

FT-IR spectra measurements and direct deuteration reactions were conducted at the User Experiment Preparation LabIII (CROSS). ¹H and ²H NMR spectroscopy experiments were conducted at the Deuteration Laboratory in J-PARC MLF. We would like to thank Editage (<https://www.editage.com>) for English language editing.

Notes and references

- 1 K. K. Sun, W. H. Hayes and T. R. Holman, *Org. Mass Spectrom.*, 1970, **3**, 1035–1042.

- 2 J. Seelig and M. P. Macdonald, *Acc. Chem. Res.*, 1987, **20**, 221–228.
- 3 B. Belleau, J. Burba, M. Pindell and J. Reiffenstein, *Science*, 1961, **133**, 102–104.
- 4 J. W. Lyding, K. Hess and I. C. Kizilyalli, *Appl. Phys. Lett.*, 1996, **68**, 2526–2528.
- 5 Y. Mitani and H. Satake, *Toshiba Rev.*, 2002, **57**, 31–34.
- 6 C. C. Tong and K. C. Hwang, *J. Phys. Chem. C*, 2007, **111**, 3490–3494.
- 7 H. Tsuji, C. Mitsui and E. Nakamura, *Chem. Commun.*, 2014, **50**, 14870–14872.
- 8 A. Mullard, *Nat. Rev. Drug Discovery*, 2016, **15**, 219–221.
- 9 T. A. Darwish, E. Luks, G. Moraes, N. R. Yepuri, P. J. Holden and M. James, *J. Labelled Compd. Radiopharm.*, 2013, **56**, 520–529.
- 10 K. Akutsu-Suyama, M. Cagnes, K. Tamura, T. Kanaya and T. A. Darwish, *Phys. Chem. Chem. Phys.*, 2019, **21**, 17512–17516.
- 11 H. Sajiki, K. Hattori, F. Aoki, K. Yasunaga and K. Hirota, *Synlett*, 2002, **07**, 1149–1151.
- 12 T. Maegawa, Y. Fujiwara, Y. Inagaki, H. Esaki, Y. Monguchi and H. Sajiki, *Angew. Chem., Int. Ed.*, 2008, **47**, 5394–5397.
- 13 Y. Fujiwara, H. Iwata, Y. Sawama, Y. Monguchi and H. Sajiki, *Chem. Commun.*, 2010, **46**, 4977–4979.
- 14 Y. Sawama, Y. Yabe, H. Iwata, Y. Fujiwara, Y. Monguchi and H. Sajiki, *Chem.–Eur. J.*, 2012, **18**, 16436–16442.
- 15 Y. Sawama, Y. Monguchi and H. Sajiki, *Synlett*, 2012, **23**, 959–972.
- 16 Y. Sawama, T. Yamada, Y. Yabe, K. Morita, K. Shibata, M. Shigetsura, Y. Monguchi and H. Sajiki, *Adv. Synth. Catal.*, 2013, **355**, 1529–1534.
- 17 Y. Sawama, K. Park, T. Yamada and H. Sajiki, *Chem. Pharm. Bull.*, 2018, **66**, 21–28.
- 18 K. Park, T. Matsuda, T. Yamada, Y. Monguchi, Y. Sawama, N. Doi, Y. Sasai, S. Kondo, Y. Sawama and H. Sajiki, *Adv. Synth. Catal.*, 2018, **360**, 2303–2307.
- 19 T. Yamada, K. Park, N. Ito, H. Masuda, W. Teranishi, S. Cui and H. Sajiki, *Bull. Chem. Soc. Jpn.*, 2020, **93**, 1000–1006.
- 20 K. Park, N. Ito, T. Yamada and H. Sajiki, *Bull. Chem. Soc. Jpn.*, 2021, **94**, 600–605.
- 21 J. O. 'M. Bockris and S. Srinivasan, *Electrochim. Acta*, 1964, **9**, 31–44.
- 22 P. R. Rowland, *Nature*, 1968, **218**, 945–946.
- 23 H. Kita, *J. Electrochem. Soc.*, 1966, **113**, 1095–1111.
- 24 Y. Takahashi, S. Oka and M. Oikawa, *Bull. Chem. Soc. Jpn.*, 1958, **31**, 220–224.
- 25 M. Saito, H. Koizumi, T. Katou, Y. Ishii and Y. Skiya, *Electrochemistry*, 2009, **77**, 370–372.
- 26 A. Pozio and S. Tosti, *Int. J. Hydrogen Energy*, 2018, **14**, 7544–7554.
- 27 K. Harada, R. Tanii, H. Matsushima, M. Ueda, K. Sato and T. Haneda, *Int. J. Hydrogen Energy*, 2020, **45**, 31389–31395.
- 28 H. Matsushima, R. Ogawa and M. Ueda, *Int. J. Hydrogen Energy*, 2019, **44**, 15436–15440.
- 29 N. Kawashima, *J. Jpn. Soc. Mech. Eng.*, 1956, **59**, 450–465.
- 30 H. K. Rae, *ACS Symposium Series*, American Chemical Society, Washington, DC, 1978.
- 31 A. Matsushima, T. Kitabata, S. Kawagoe, K. Kitamura, K. Suzuki, T. Haneda and S. Hayashi, *JNC Technical Review*, 2001, **11**, 81–91.
- 32 A. Matsushima, T. Haneda, S. Hayashi and S. Kiyota, *JNC Technical Review*, 2003, **20**, 73–94.
- 33 T. Yamanishi, Y. Iwai, K. Isobe and T. J. Sugiyama, *Plasma Fusion Res.*, 2007, **83**, 549–559.
- 34 H. Matsushima, T. Nohira, T. Kitabata and Y. Ito, *Energy*, 2005, **30**, 2413–2423.
- 35 R. Ogawa, R. Tanii, R. Dawson, H. Matsushima and M. Ueda, *Energy*, 2018, **149**, 98–104.
- 36 P. M. K. Milica, M. N. Vladimir, D. M. Aleksandar, S. T. Gvozden and S. M. Scepan, *Electrochem. Commun.*, 2008, **10**, 1463–1466.
- 37 H. Takata, M. Nishikawa, T. Egawa and N. Mizuno, *J. Nucl. Mater.*, 2007, **367–370**, 1102–1106.
- 38 Tokyo Metropolitan Industrial Technology Research Institute (TIRI), *Japanese Patent Publication*, JP 2010-6637A, 2008.
- 39 J. C. Yang and S. Y. Lin, *Instrum. Sci. Technol.*, 1999, **27**, 95–103.
- 40 K. Akutsu-Suyama, K. Park, R. Takakura, K. Tamura, M. Cagnes, T. A. Darwish, T. Yamada, Y. Sawama and H. Sajiki, *JPS Conf. Proc.*, 2021, **33**, 011150.
- 41 D. L. Stojic, S. S. Miljanic, T. D. Grozdic, N. M. Bibic and M. M. Jaksic, *Int. J. Hydrogen Energy*, 1991, **16**, 469–476.
- 42 P. R. Rowland, *J. Electroanal. Chem. Interfacial Electrochem.*, 1971, **32**, 109–124.
- 43 N. R. Yepuri, S. A. Holt, G. Moraes, P. J. Holden, K. R. Hossain, S. M. Valenuela, M. James and T. A. Darwish, *Chem. Phys. Lipids*, 2014, **183**, 22–33.
- 44 C. Rakousky, U. Reimer, K. Wippermann, M. Carmo, W. Lueke and D. Stolten, *J. Power Sources*, 2014, **326**, 120–128.
- 45 F. Fouda-Onana, M. Chansdesris, V. Medeau, S. Chelghoum, D. Thoby and N. Guillet, *Int. J. Hydrogen Energy*, 2016, **41**, 16627–16636.
- 46 E. Anderson, K. Ayers and C. Capuano, *Presented in Part at the First Workshop on Durability and Degradation Issues in PEM Electrolysis Cells and its Components*, Freiburg, 2013.