

## REVIEW

# A comprehensive review of approaches to detect fatigue using machine learning techniques

Rohit Hooda<sup>1</sup> | Vedant Joshi<sup>2</sup> | Manan Shah<sup>3</sup>

<sup>1</sup>Gandhinagar Institute of Technology, Gujarat Technological University, Gandhinagar, Gujarat, India

<sup>2</sup>LJ Institute of Engineering and Technology, Gujarat Technological University, Ahmedabad, Gujarat, India

<sup>3</sup>Department of Chemical Engineering, School of Technology, Pandit Deendayal Energy University, Gandhinagar, Gujarat, India

**Correspondence**

Manan Shah, Department of Chemical Engineering, School of Technology, Pandit Deendayal Energy University, Gandhinagar, Gujarat, India.

Email: [manan.shah@spt.pdpu.ac.in](mailto:manan.shah@spt.pdpu.ac.in)

Edited by Yi Cui

**Abstract**

In the past decades, there have been numerous advancements in the field of technology. This has led to many scientific breakthroughs in the field of medical sciences. In this, rapidly transforming world we are having a difficult time and the problem of fatigue is becoming prevalent. So, this study aimed to understand what is fatigue, its repercussions, and techniques to detect it using machine learning (ML) approaches. This paper introduces, discusses methods and recent advancements in the field of fatigue detection. Further, we categorized the methods that can be used to detect fatigue into four diverse groups, that is, mathematical models, rule-based implementation, ML, and deep learning. This study presents, compares, and contrasts various algorithms to find the most promising approach that can be used for the detection of fatigue. Finally, the paper discusses the possible areas for improvement.

**KEYWORDS**

deep learning, driver monitoring, fatigue detection, healthcare, machine learning

## 1 | INTRODUCTION

Artificial intelligence (AI) is a term which can be referred to any machine that exhibits traits that are associated with the human mind like problem-solving or learning. Machine learning (ML) is a subfield of AI that enables the machine to learn patterns using historical data without being explicitly programmed to do so.<sup>1</sup> The most common algorithms used in this field are Bayesian learning, support vector machine (SVM), clustering, regression, classification.<sup>2</sup> Another subfield of AI is deep learning (DL) that uses artificial neural networks (ANNs) which were inspired by the biological neurons in the human brain. These neural networks progressively extract high-level features from the input.<sup>3</sup> The most popular used DL algorithms are convolutional neural networks, generative adversarial networks, long short-term memory, recurrent neural networks (RNNs), and so forth.

Fatigue is associated with a change in the psychological state of a person, caused by relentless periods of

arduous activity.<sup>4,5</sup> It is one of the most common problems occurring amongst patients, in which an individual experiences resistance against an activity,<sup>4,6</sup> mood swings<sup>4,7</sup> and feeling lethargic. It is a symptom that is mainly linked with illness, stress, aging, and depression. Also, it is reported that one of the major symptoms in multiple sclerosis and Parkinson's disease, poststroke, and poliomyelitis is fatigue.<sup>8,9</sup> Fatigue is mainly categorized as physical and mental fatigue. Physical fatigue is an ephemeral condition in which an individual is unable to maintain optimal physical performance, whereas mental fatigue is a psychobiological state induced by a prolonged period of demanding cognitive.<sup>10,11</sup> In mental fatigue, an individual can experience a temporary decrease in cognitive performance which can manifest sleepiness, lack of energy, attention,<sup>5</sup> and sometimes an acute decline in cognitive performance might be observed as well.<sup>10</sup>

A recent study shows that 3.6% of fatal road accidents are the consequences of physical exhaustion or drowsiness.<sup>12,13</sup> According to some reports, about 20% of

This is an open access article under the terms of the Creative Commons Attribution-NonCommercial-NoDerivs License, which permits use and distribution in any medium, provided the original work is properly cited, the use is non-commercial and no modifications or adaptations are made.

© 2022 The Authors. *Chronic Diseases and Translational Medicine* published by John Wiley & Sons Ltd on behalf of Chinese Medical Association.

fatal accidents and 30% of crashes that happened in Australia are because of some kind of driver error. Moreover, in the United States about thousands of people die each year because of driver's somnolence.<sup>12,14</sup> A study has shown that fatigue severely affects the spontaneous response of an individual to a situation. A recent survey shows that 20% of fatal accidents occur due to various types of fatigue.<sup>15</sup> So, monitoring the attention of the driver is considered a very crucial parameter for safe driving.<sup>16,17</sup>

There are some novel methods in ML and DL which are promising for the detection of fatigue which is presented in the literature.<sup>18-22</sup> The areas where ML and DL can be helpful are: (1) monitoring/analyzing electroencephalogram (EEG) signals<sup>23</sup>; (2) yawning detection; (3) facial muscle detection; (4) drowsiness detection; (5) pupil detection.

For example, EEG is a majorly used and auspicious method for measuring the brain's electrical activity for detecting sleep patterns, and hence it has been observed as a crucial feature in detecting fatigue.<sup>23</sup>

Finally, to recapitulate ML and DL can be useful in fatigue detection as well as in the diagnosis of it which in turn can benefit the growth of the healthcare industry. This article reflects a thorough review of research findings related to fatigue detection.

## 2 | METHODOLOGIES OF REVIEW

### 2.1 | Search methodology and article selection

The literature review presented has retrieved articles by querying the terms like ["physical" or "mental" or "driver"] + "fatigue" + ["effects or detection or monitoring"] + ["EEG" or "EOG" or "sleepiness detection" or "face tracking"] into few databases like: Google Scholar, PubMed, Science Direct, IEEE, and Springer.

All the applications where fatigue detection can be used have been discussed in this review. Prior Studies are considered to be less relevant as the techniques introduced had less accuracy, were costly and the scope of implementation was comparatively less.

### 2.2 | Methodological and thematic analysis of articles

A total of 67 articles were retrieved using the above-mentioned method. On reviewing these articles, 17 articles were excluded using: their title, language, and having less relevance with the objective of this article.

The focus of this article is to understand the causes, manifestations of fatigue followed by developing a


method for its detection using advanced ML methods. The summary and analysis of the methods in these 50 articles is done by considering the following four questions: (1) What is the main objective of the article? (2) Which different features are used to detect fatigue? (3) What is the resulting outcome? (4) What type of data was considered during the process? Finally, a comparative analysis is presented between the methods to find out which method is more promising when compared to other methods.

## 3 | CLINICAL MANIFESTATIONS OF FATIGUE

Fatigue is mainly categorized as active fatigue and passive fatigue.<sup>24</sup> Active fatigue is a state caused by continual involvement in an arduous activity. Some characteristics like an increase in the feeling of tiredness, an aversion towards a task, or a decrease in mental and athletic performance can be observed. People who work long hours in grueling task experiences this kind of fatigue. Passive fatigue is a consequence of any dull or repetitive task. For example, prolonged periods of road driving can cause the person to lose interest resulting in accidents. While driving, the relation between eye flickering and response time shows a positive correlation to this kind of fatigue.<sup>25</sup> A research<sup>26</sup> suggested that the driver's performance on non-curved roads, when compared to the curved road, is less because driving on a straight road is uninteresting and causes passive fatigue. A study<sup>26,27</sup> suggested that the driver's performance on straight roads as compared to the curved road is less because driving on a straight road is monotonous and causes passive fatigue. Philip et al.<sup>28</sup> illustrated that the performance of the driver is dependent on the time of day and the number of hours he/she slept in the last 24 h. Figure 1 shows the effects of fatigue.

### 3.1 | Comparative analysis of simple fatigue and fatigue induced by diseases

Tiredness is the most common problem occurring among patients in health care. According to a Dutch healthcare registry, fatigue is the most commonly observed symptom in patients.<sup>29,30</sup> Another study from Canada shows that<sup>30,31</sup> 13.6% of patients consulted a physician for treatment of fatigue. Fatigue is a state of feeling lethargic to carry out the daily chores. It is normal to feel tired after doing an intense physical exercise with which an individual is not acquainted. The most common daily routine activities that cause tiredness in an individual are: extended wakefulness,<sup>32</sup> long working hours,<sup>33</sup> sleep debt,<sup>33</sup> depression.<sup>30</sup>

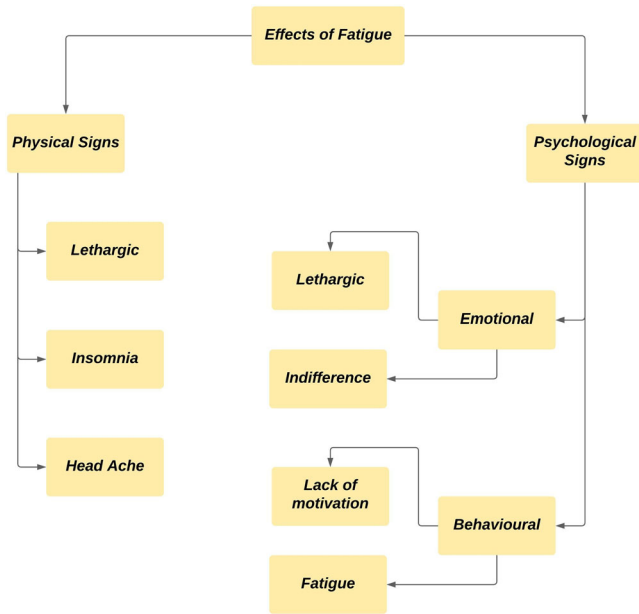


**FIGURE 1** Classification of effects of fatigue on the basis of clinical manifestations

Every fifth patient consulted a general practitioner for tiredness suffered from a depressive disorder.<sup>30</sup> Taking an adequate amount of sleep, a healthy nutritional diet, vitamin supplements, and taking less stress can help cure tiredness. Although fatigue is the most common symptom in diseases like cancer or multiple sclerosis, it is also experienced by the general healthy population.

Chronic fatigue syndrome (CFS) is a type of tiredness that is difficult to cure. CFS is a long-term condition in which an individual feels extremely sluggish. This syndrome depending upon the severity of it can affect an individual's life. In severe cases of CFS, an individual may find it difficult to perform basic daily tasks like taking a bath or brushing teeth. According to the National Health Service, CFS affects around 25,000 people in the United Kingdom. It is more common among women compared to men. Some of the common symptoms experienced by an individual in CFS are as below: a loss of memory and lack of concentration; severe headache; sleeplessness; muscular pain; brain fog.

The exact cause of CFS is still unknown. Some theories point to problems with the immune system or hormone imbalance or emotional trauma or bacterial infection. Hence it is the responsibility of the general practitioner to take the history of individuals to decide up to what extent diagnostic measures should be taken.<sup>30</sup> Hence risk mitigation strategies for fatigue detection should be implemented, not only to reduce these short and long-term health risks in individuals but also to create a more efficient and effective workplace.

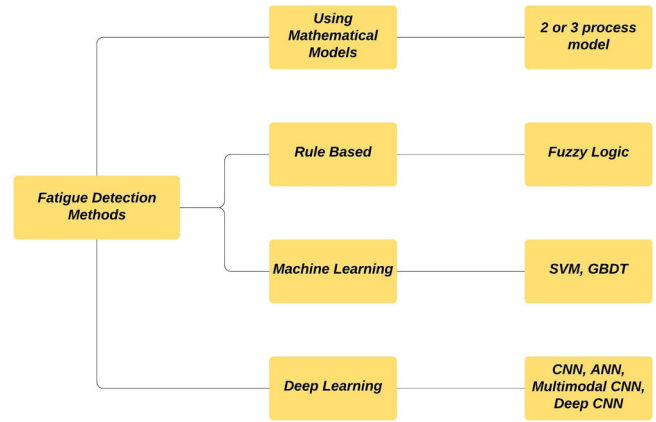

**FIGURE 2** Classification of fatigue detection methods

## 4 | FATIGUE DETECTION METHODS

The methods for fatigue detection can be implemented via mathematical models, DL models, ML models which is summarized in Figure 2.

### 4.1 | Fatigue detection using mathematical models

Mathematical models help us in understanding the correlation between sleep cycles and the performance of an individual. These models consider the features such as sleep duration, wakefulness duration, a circadian cycle, and history of sleep periods to predict the level of fatigue. One of the primary models for the detection of fatigue was known as Two Process model.<sup>16,34</sup>

The Two Process model is based on the activity between two processes which are homeostatic (S) and circadian (C) processes. The mentioned process is used to predict the level of fatigue and performance of the driver. Later Two Process model was upgraded to Three Process Model of Alertness.<sup>16,35</sup> Three Process model takes the features such as sleep duration and wakefulness into consideration and predicts the level of fatigue and alertness of the driver. Another system known as Aircrew Fatigue Evaluation (SAFE) model<sup>36,37</sup> was developed by taking pilots as the center focus. This model presents the alertness levels of the pilot during flight. Another model which is based on Activity, Fatigue, Task Effectiveness (SAFTE)<sup>38,39</sup> has also been created which is similar to SAFE. The only difference between these two algorithms (SAFE and SAFTE) is that SAFTE considers both real-time data and the data which is being generated by the sleep algorithm, whereas SAFE only takes in real-life data.

The models illustrated above are only for general purpose use. They can be used to supervise long working hours. Most mathematical model-based approaches are used in generic setup, that is, in factory, aviation, and so forth. But, due to the recent development in smarter systems, researchers are focusing towards other systems.

## 4.2 | Fatigue detection based on certain defined rules

This approach is considered a less challenging approach for detecting fatigue. For complicated detection system a system/algorithm known as fuzzy inference systems (FIS)<sup>16,40</sup> is preferred over rule-based approach. It uses fuzzy rules and membership functions to find an accurate outcome. It also offers inbuilt functions and maps input to output by using IF-THEN rules. An advantage of FIS is that it provides parallel processing of data. Another advantage of FIS is that it can learn the task from the knowledge base as well as from incorporating additional rules.

Devi and Bajaj<sup>41</sup> suggested a technique for detection of fatigue, where the mouth and eye states were used as an input for FIS and then FIS predicted the state of driver as dangerous, fatigue, or normal. The eye states were divided into the following categories: blinking, closed, or sleepy. Whereas, the mouth states were categorized as normal or yawning. Another research<sup>16,42</sup> has taken the above-mentioned features into consideration and developed a technique to detect fatigue using a two-layered FIS.

## 4.3 | Fatigue detection using ML

### 4.3.1 | Fatigue detection using yawning as parameter

Fan et al.<sup>43</sup> suggested a method for tracking face movement with the help of a camera. During yawning, geometric features of the face changes so, yawning can be detected using these geometric features. In the method proposed by Fan et al.<sup>43</sup> a gravity-center template<sup>43,44</sup> was used to detect mouth corners by using gray projection. Then, Fan et al.<sup>43</sup> extracted the features of the mouth by using Gabor wavelets. This produced information about organs such as eyes, nose, mouth, lips which are important for the detection of facial features. Finally, a two-dimensional representation Gabor wavelet was used to analyze and process the texture of the image. Then linear discriminant analysis was used to classify feature vectors to detect yawning.

This proposed technique was evaluated on 400 images and 20 videos consisting of 4512 faces. This method not only detects faces in instantaneously but

also provides high accuracy. Gabor features were able to detect yawning with an accuracy of 96% whereas, the geometric features were able to detect yawning with an accuracy of 69.5%. Hence the results of this experiment illustrate that Gabor coefficients are more efficient than geometric features.

### 4.3.2 | Fatigue detection using skin conductance

Bunde and Banerjee<sup>45</sup> designed two classifiers for the detection of fatigue with skin conductance. The main goal of the paper was to provide a comparative study between Multilayer Perceptron Neural Network (MLP NN) and SVM. The authors of this paper consider features like skin conductance, oximetry pulse, respiration, and SpO<sub>2</sub> as the main primary features<sup>45,46</sup> for the detection of fatigue. To collect these parameters drivers aged between 25 and 55 years were asked to drive trucks, cars, bus. Some measurements (like EEG, pulse rate, respiration rate) were taken after each subject has completed at least 100–600 km of the drive. The features for skin conductance signal were then extracted using MATLAB. Finally, a MLP NN and SVM were designed to detect fatigue levels with skin conductance.

The classifiers designed had 18 input features consisting of 2392 rows. The accuracy for fatigue detection using the skin conductance method using SVM and MLP NN were 92.95% and 89.45%, respectively. Hence, it is quite apparent that the conductance of skin can be used as a supporting parameter for fatigue detection.

### 4.3.3 | Fatigue detection using eye state

Wang et al.<sup>47</sup> proposed a method for the detection of the state of eye. There are mainly two challenges that are faced while detecting an eye's state: eye's position and light illumination. The eye-detection system has two main tasks. The first is eye detection and the second is eye state detection. There are many methods developed in the past that were developed to detect eye with geometrical features. So, in this paper, the author's main was to detect eye state.

Viola-Jones method was used to detect eyes from the video frames captured by the webcam. AdaBoost algorithm was used to select the feature set and to train classifier. It ensembles weak classifiers and forms a strong classifier.<sup>47–49</sup> Finally, to find the state of an eye a traditional binary image classifier was used. The above-suggested method used 1500 open eye (positive) and 700 closed eyes (negative) with different illuminations for training. Table 1 illustrates the detection results of the ensemble method.

It can be observed from Table 1 that this technique is promising for detecting eye states using a webcam. This algorithm can distinguish eye states in instantaneously with a camera in somewhat harsh conditions. The accuracy

**TABLE 1** Accuracy of eye state detection in different lighting conditions

Lighting condition	Overall accuracy	Accuracy to detect open eye	Accuracy to detect closed eye
Indoor video	99.17%	97.34%	97.11%
Outdoor video	89.51%	96.11%	98.5%
Driving video	81.86%	93.30%	81.25%

**TABLE 2** Comparative analysis of above mentioned<sup>50</sup> methods with several other methods

References no.	Feature method	Classifier	Average accuracy
51	Multimodal analysis	Neural network	83.6%
52	Fast Fourier transformation	Linear regression	90%
50	Fuzzy entropy	Gradient Boosting Decision Tree	95%

of this approach is higher when compared to previously done work under the same experimental conditions.

#### 4.3.4 | Fatigue detection using Gradient Boosting Decision Tree

Hu and Min<sup>50</sup> tried to detect the characteristics of EEG signals, by calculating feature sets which included the entropies such as a sample, spectral, fuzzy, and approximate. The authors used Gradient Boosting Decision Tree (GBDT) for the detection of fatigue which had the above-mentioned features as input. To assess the GBDT method, three widely known classifiers namely K-nearest neighbors, SVM, ANN were used for comparison.

Further, the authors conducted experiments in 22 humans. They were asked to not consume alcohol or any kind of medications before the experiments and during the experiments. Initially, they were asked to practice driving for several minutes to get acquainted with the system. The duration of the experiments conducted was around 40–120 min. The output of GBDT is used to determine whether the driver was in a state of fatigue or not. The results of these experiments demonstrated that it is possible to achieve accuracy up to 95% for detecting fatigue using EEG. This shows that this method can be used for detecting fatigue in daily applications. Table 2 shows several methods for fatigue detection.

#### 4.3.5 | Fatigue detection using facial behavior

Dey et al.<sup>12</sup> suggested a novel and economical method for real-time detection of eye state, yawning, and head movement. The article suggested that a pretrained model which consists of the histogram-oriented gradient method and SVM. The model assessed eye aspect ratio (EAR), nose length ratio, and mouth opening ratio. To detect the features in real-time, a camera was designed to take the video frame and a total of 68 data points were extracted from every frame. Along with this, a simultaneous model was used to evaluate the EAR to detect drowsiness, nose length ratio for detecting head bending, and mouth opening ratio to detect yawning. These values are then compared with the threshold values from the original model. If these values are not in the specified range, it would be considered as an outlier thereby detecting fatigue. The accuracy for the detection of facial behavior with functional linear discriminant analysis and SVM were 93.3% and 96.4%, respectively.

It can be noted that the method is promising for detecting eye states using a webcam. This technique can detect eye states in real-time with a webcam in slightly harsh conditions. The accuracy of this approach is higher when compared to previously done work under the same experimental conditions.

#### 4.4 | Comparing and contrasting methods of fatigue detection using ML

Table 3 shows a comparison of various ML methods that are introduced and discussed in the above section. The better method for the detection of fatigue is by using features like EEG signals and facial behavior, and yawning detection. Although fatigue detection using yawning has higher accuracy, there are some disadvantages of the method.

Dey et al.<sup>12</sup> suggested a novel approach to detect fatigue by combining head, eye, and mouth movement and calculating their ratios to get an accurate result. The method suggested by Dey et al.<sup>12</sup> is easy and less costly to implement. Hu and Min<sup>50</sup> introduced an approach to detect fatigue using EEG signals. They tried to detect the characteristics of EEG signals, by calculating feature sets which included the entropies such as a sample, spectral, fuzzy, and approximate. They then used GBDT for the detection of fatigue which had the above-mentioned features as input.

The method of detecting fatigue using EEG signals has a slightly higher accuracy but, there are some disadvantages and limitations of this method. First, capturing EEG signals requires more sensors, and attaching them to the human body is also not possible as they are prone to noise and movement. Second, implementing this method is costly as it requires costly sensors and equipment. Dey et al.'s<sup>12</sup> method for fatigue detection

**TABLE 3** Overview of all the machine learning methodologies for fatigue detection discussed in this article

Features for detection	Types of features	Authors (Ref.)	Year	Data extraction	Model	Accuracy
Yawning detection	Physical	Fan et al. <sup>(43)</sup>	2007	400 Images	Gabor Coefficients	95%
Skin conductance	Biological	Bundele and Banerjee <sup>(45)</sup>	2009	Driving footage of people 25–55 year age group	Support Vector Machine	92.95%
Eye state	Physical	Wang et al. <sup>(47)</sup>	2010	2100 Images	AdaBoost	90.18% Approximately
EEG signals	Biological	Hu and Min <sup>(50)</sup>	2018	22 Features comprising 6600 rows data	Gradient Boosting Decision Tree	95%
Facial behavior	Physical	Dey et al. <sup>(12)</sup>	2019	68 Facial points extracted from 30 min of driving	Support Vector Machine	94.8%

Abbreviation: EEG, electroencephalogram.

requires only a high-resolution camera even though it has slightly less accuracy. Also, his method can be implemented in real-time whereas, implementing Hu and Min<sup>50</sup> methods in real-time is not feasible.

## 4.5 | Fatigue detection using DL

### 4.5.1 | Fatigue detection with multimodal DL

Du et al.<sup>53</sup> proposed a multimodal approach by combining EEG and electro-oculogram (EOG) to detect fatigue. Physiological signals are used widely to detect the state of human beings, as they are more stable and accurate. The amplitude of EOG signals, when compared to EEG signals, is higher which is why EOG signals are more effective against noise. In this paper, the authors introduced a multimodal deep autoencoder model for fatigue detection. The model introduced uses EEG and EOG signals for fatigue detection. The experiment was performed on people which were asked to drive for at least 2 h. Then, EOG and EEG signals were captured using a NeuroScan System and SVM along with radial basis function was used as a regression model.

To measure the efficiency of the fusion technique, the authors trained two unimodal models with EEG and EOG signals only. The outcome of this was compared to another model trained with fusion strategies. The experiment outcome suggested that the feature fusion model performs better than the model trained on individual features. The authors of this paper finally presented a multimodal deep auto-encoder model which gave an accuracy of 85%.

### 4.5.2 | Drowsiness detection using DL

Rundo et al.<sup>23</sup> presented a method for the detection of drowsiness using ML. The overall aim of the research was to develop state-of-the-art techniques for detecting drowsiness

stages in EEG (the best physiological measurement). A discrete cosine transform (DCT) block is used to perform the frequency-domain transformation of EEG samples. The results are then resized by bicubic remapping constituted of 256 samples. The outcome transformed is converted into a single-dimensional matrix consisting of 256 frequency samples. The inputs for the autoencoder layers were optimized frequency signals of EEG generated from DCT. An Autoencoder is used to discover unsupervised data patterns along with dimensionality reduction. To increase the efficiency of the system, a greedy layer-wise approach is considered (Figure 3).

In the above architecture, each autoencoder has 256 neurons as input and a 10-neuron hidden layer. The output of the first encoder is discarded and correlated features are considered as an input to the next autoencoder. Then a Softmax function is used for the classification of  $k$ -dimensional normalized vector into two classes. If the output falls in the range of 0–0.5 (Class 0) then the person is classified as a drowsy person or if it falls in the range 0.51–1.00 (Class 1) then the person is classified as wakeful.

The results obtained from the above method were 100% accurate when tested on 62 individuals dominating all the previous methodologies and promising usefulness in the future generations of medical devices. This approach is the most promising one when compared with several other methods like<sup>54</sup> SVM + Bayes which had an accuracy of 90.6%, whereas SVM was 98% accurate, ANN had an accuracy of 99.5% whereas the current method proposed had an accuracy of 100%.

## 5 | COMPARING VARIOUS PARAMETERS FOR DETECTION OF DRIVER FATIGUE

In the above sections, there are numerous methods and features discussed which can be used for fatigue detection. But, at the time of development of a system that

can detect fatigue, some features are more important than the other features. Few things that should be kept in mind while designing such a system. First, the sensor that is used for detecting fatigue should not hinder the driver. Second, the detection process should be autonomous and must process data in real-time.

The detection of fatigue using biological features provides the most accurate results as they show the internal state of the body. For generating biological features (like EEG, EOG, electrocardiogram [ECG] signals) many electrodes and sensors are connected to the body which makes the driver feel uncomfortable and thereby making the system not advisable to detect fatigue in real-time.<sup>16,55</sup> There is another problem with this approach. During the retrieval of EEG, signal noise might be induced into signals due to external factors.<sup>56</sup> ECG can be measured easily when compared to all the other biological features. But ECG differs from person to person so we can use them for the identification of a person.<sup>57,58</sup> The sensors required for the detection of biological features are complex and expensive. Also, signals generated from these sensors require pre-processing to remove noise. So, detection of fatigue in real-time using biological features is difficult and expensive.


To resolve this problem we can use either physical or vehicular features which seem more desirable and are also not that difficult to generate. The vehicular features can be used to determine drowsiness because during drowsiness a driver might not be able to control the vehicle or there will be some deviation in the direction of the vehicle. But as illustrated by Ingre et al.<sup>59</sup> the effect of fatigue might not be the same for each individual. Also, these features are influenced by weather or traffic conditions. So due to these difficulties in fatigue detection using physical features can be considered as an effective strategy for fatigue detection.

There are several methods that can be used to detect fatigue in real-time using these features. Barr et al.<sup>60</sup> conducted an experiment and noted that lighting has a significant effect on the measurement and reliability of physical features. The methods that use physical features are highly dependent on image processing. So, these methods need to be robust and should be able to detect the features under any lighting conditions. To

detect these features and achieve nice accuracy researchers have tried to use infrared cameras. Using this type of camera, the pupils can be detected under any light condition.

A comparative analysis of all detecting fatigue using these features, that is, vehicular, physical, and biological was done by Jacobé de Naurois et al.<sup>61</sup> Many features like the position of head, steering wheel, deviation of lane, and so forth were detected using ANN which was trained by biological, vehicular, physical features, or using all of these features. ANN trained also incorporated some additional parameters such as driving time, participant information. It was observed that ANN trained with the physical features, driving time, and participant information achieved the best result. A study conducted by Horne et al.<sup>16,62</sup> illustrated that the age of the driver and driving time played a crucial role in sleep-related accidents. So, external signs like this should also be considered while detecting fatigue. There were several other factors like speed limit, surrounding environment, weather conditions which should be taken care of while detecting fatigue and for driver safety.<sup>16,63</sup>

Finally, after comparing and contrasting all the methods and features that can be used for fatigue detection, we came to a conclusion that there is no single feature that can reliably detect fatigue. So, using a method that combines multiple features for detection would give an accurate result. For the real-time implementation of fatigue detection system biological features (EEG, EOG) are less feasible and hence should not be used for detecting fatigue. Vehicular features can be used to detect fatigue where the duration of the drive is longer. These features depend on other factors like weather, driving style, and so forth. So, they should not be used for the detection of fatigue in an urban environment. The detection of driver fatigue is an arduous task. The feasibility of a method for fatigue detection lies in the processing of data as fast as possible and also in providing accurate results. Table 4 shows a comparison of techniques that can be used to detect fatigue. The most suitable feature for the detection of fatigue is the physical feature. The accuracy can further be improved fusion between different features can be done.

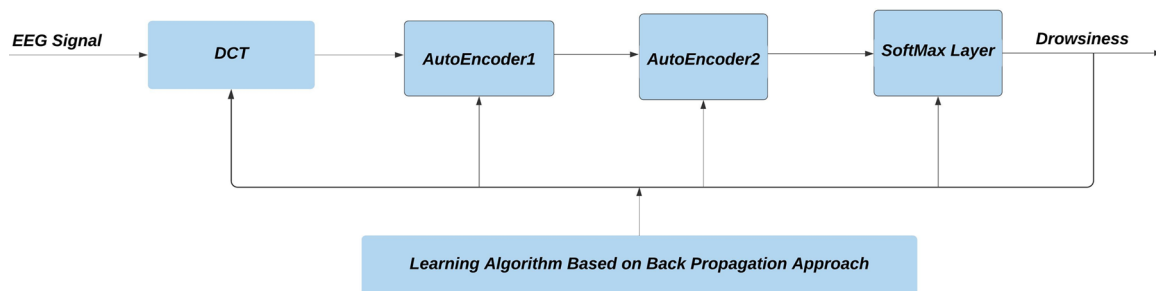

**FIGURE 3** Architecture of the proposed method. Discrete cosine transform (DCT) performs frequency transformation of electroencephalogram (EEG) signals. Then autoencoders were used to extract the features and finally SoftMax layer is used for classification

**TABLE 4** Comparative analysis between various parameters that can be used for fatigue detection

Category	Parameters	Cost	Limitations	Scope of real-time implementation
Biological features	EEG <sup>50</sup>	High	Prone to noise and human movement	No
	ECG	High		No
	EOG <sup>53</sup>	High		No
Vehicular features	Lane deviation	Low	Dependency of environment and driver	Yes
	Pressure sensor	Low		Yes
Physical features	Yawning <sup>43</sup>	Low	Lighting and background dependency	Yes
	Slow eye movement <sup>64</sup>	Moderate		Yes
	Drowsiness <sup>23</sup>	Low		Yes

Abbreviations: ECG, electrocardiogram; EEG, electroencephalogram; EOG, electro-oculogram.

## 6 | FUTURE WORK AND CHALLENGES

As the detection of fatigue needs to be in real-time, so the main goal of this section is to study the current problems and suggest some future areas of development for this technology. The future work can be based on two aspects: technology used for the detection and implementation of it. The methods that are currently used for the detection of fatigue rely on a single kind of parameter for the detection of fatigue. But fatigue is a complex phenomenon, it cannot be represented or detected accurately with a single feature. So, these methods need some improvement both in terms of accuracy and robustness. The methods which can use a combination of multiple features are more credible.<sup>65</sup> So, how to develop these methods is a problem that needs to be addressed.

After studying many reviews, we have concluded that EEG is the most promising approach for the detection of fatigue.<sup>23,66</sup> Although, it is very promising there are some difficulties which need to be addressed as well. The physiological measurements like brain waves, muscle's electric signal's intensity, heart rate frequency, and so forth are challenging to generate, as the user needs to wear or apply the components or tools to his or her body, which is very unwelcoming and also might affect his performance. There are two ways in which we can improve the sensors: noncontact sensors and wearable sensors.<sup>65</sup> The noncontact sensors can be attached to the vehicle and these sensors can collect different physiological parameters. But we need to keep in mind the cost of manufacturing such sensors, which can be costly and in turn making this method useless. In the recent decade, wearable sensors are becoming popular and have also been streamlined by major companies like Apple, Google, and so forth. Hence wearable sensors are a better choice when compared to noncontact sensors.

Another approach illustrated in this paper for the detection of fatigue involves monitoring the behavior of the vehicle which can include sudden changes in the

position of the steering wheel, immediate deceleration, lane crossing, and so forth.<sup>67</sup> But this approach is not promising in some conditions. Another method that can be used for fatigue detection is based on the detection of facial features. This method seems the best when compared with other methods illustrated in this paper. But these methods rely on only a single feature. So, a method can be developed by the data fusion of driver and vehicle-related features for developing a more robust and accurate system for the detection of fatigue.

We think that the use of fatigue detection systems will be prevalent soon and will be useful in maintaining a balanced life and safer roads. The widespread use of this system will only be possible if the underlying methods for the detection of fatigue are accurate and can detect it in real-time. In the upcoming future, wireless capability might provide a boost for the detection of fatigue.

## 7 | CONCLUSION

This review presents an in-depth analysis, advancements, and state-of-the-art methods for fatigue detection. Fatigue has physical, mental, or psychological effects on an individual. In this paper, we have discussed, compared, and analyzed various techniques for the detection of fatigue. Some methods address the cause of fatigue while, others use state-of-the-art methods to detect yawning, monitoring the state of the eye, or drowsiness of an individual. The features used for detection might be only physical features or biological features or a combination of both, that is, hybrid features while, the methods that can be used for the detection of fatigue are classified mainly into four categories: mathematical model, rule-based, ML, and DL. A system built for the detection of fatigue needs to detect fatigue in real-time and accurately, so in this review we compared and contrasted some methods and features that can detect fatigue. This comparison not only shows that biological features (such as EEG, EOG, heart rate) alone should not be used to detect fatigue in real-time but also, illustrates that to achieve higher accuracy



for detection of fatigue a combination of both physical (such as eye, face, mouth) and biological features should be used. There are some ML and DL (like GBDT, SVM, ANN) methods that can optimize this process. Finally, we have discussed some challenges and future work that is left to be done, which might increase the accuracy of the existing work, thereby unlocking the door to expand the possibilities of advancements in the domain of fatigue detection.

## ACKNOWLEDGMENTS

The authors are grateful to Gandhinagar Institute of Technology, Department of Chemical Engineering, School of Technology, LJ Institute of Engineering and Technology, Pandit Deendayal Energy University for the permission to publish this study.

## CONFLICT OF INTERESTS

The authors declare no conflict of interest.

## DATA AVAILABILITY STATEMENT

All relevant data and material are presented in the main paper.

## REFERENCES

- Solanki P, Baldaniya D, Jogani D, Chaudhary B, Shah M, Kshirsagar A. Artificial intelligence: new age of transformation in petroleum upstream. *Pet Res*. 2021;167:300. doi:10.1016/j.ptlrs.2021.07.002
- Nguyen G, Dlugolinsky S, Bobak M, et al. Machine learning and deep learning frameworks and libraries for large-scale data mining: a survey. *Artif Intell Rev*. 2019;52:77-124. doi:10.1007/s10462-018-09679-z
- Deng L, Yu D. Deep learning: methods and applications. *Found Trends Signal Process*. 2013;7:197-387. doi:10.1561/20000000039
- Martin K, Meeusen R, Thompson KG, Keegan R, Rattray B. Mental fatigue impairs endurance performance: a physiological explanation. *Sport Med*. 2018;48:2041-2051. doi:10.1007/s40279-018-0946-9
- Marcora SM, Staiano W, Manning V. Mental fatigue impairs physical performance in humans. *J Appl Physiol*. 2009;106:857-864. doi:10.1152/jappphysiol.91324.2008
- Meijman TF. The theory of the STOP-Emotion: on the functionality of fatigue. *Ergon Glob Qual Saf Product*. 2000:45-50.
- Hockey Robert. *Stress and fatigue in human performance*. Vol 3. Wiley; 1983.
- Harrington ME. Neurobiological studies of fatigue. *Prog Neurobiol*. 2012;99:93-105. doi:10.1016/j.pneurobio.2012.07.004
- Barsevick AM, Cleeland CS, Manning DC, et al. ASCPRO recommendations for the assessment of fatigue as an outcome in clinical trials. *J Pain Symptom Manage*. 2010;39:1086-1099. doi:10.1016/j.jpainsymman.2010.02.006
- Smith MR, Marcora SM, Coutts AJ. Mental fatigue impairs intermittent running performance. *Med Sci Sports Exerc*. 2015;47:1682-1690. doi:10.1249/MSS.0000000000000592
- Lorist MM, Boksem MAS, Ridderinkhof KR. Impaired cognitive control and reduced cingulate activity during mental fatigue. *Cogn Brain Res*. 2005;24:199-205. doi:10.1016/j.cogbrainres.2005.01.018
- Dey S, Chowdhury SA, Sultana S, Hossain MA, Dey M, Das SK. Real time driver fatigue detection based on facial behaviour along with machine learning approaches. *2019 IEEE International Conference on Signal Processing, Information, Communication & Systems (SPICSCON)*. 2019; pp 135-140. doi:10.1109/SPICSCON48833.2019.9065120
- Knipling RR, Wierwille WW. *Vehicle-based drowsy driver detection: current status and future prospects*. 1994; pp. 4-7. Accessed March 31, 2021. <https://rosap.ntl.bts.gov/view/dot/15347>
- Verma B, Choudhary A. Framework for dynamic hand gesture recognition using Grassmann manifold for intelligent vehicles. *IET Intell Transp Syst*. 2018;12:721-729. doi:10.1049/iet-its.2017.0331
- Coetzer RC, Hancke GP. Driver fatigue detection: a survey. *AFRICON 2009*. 2009; pp. 1-6. doi:10.1109/AFRCON.2009.5308101
- Sikander G, Anwar S. Driver fatigue detection systems: a review. *IEEE Trans Intell Transp Syst*. 2019;20:2339-2352. doi:10.1109/TITS.2018.2868499
- Endsley MR. Toward a theory of situation awareness in dynamic systems. *Hum Factors*. 1995;37:32-64. doi:10.1518/001872095779049543
- Kaplan S, Guvensan MA, Yavuz AG, Karalurt Y. Driver behavior analysis for safe driving: a survey. *IEEE Trans Intell Transp Syst*. 2015;16:3017-3032. doi:10.1109/TITS.2015.2462084
- Saini V. Driver drowsiness detection system and techniques: a review. *Int J Comput Sci Inf Technol*. 2014;5:4245-4249.
- Lee JD, Sin CH. PPS-RTBF: privacy protection system for right to be forgotten. *J Converge Vol*. 2014;(5):37-40.
- Sahayadhas A, Sundaraj K, Murugappan M. Detecting driver drowsiness based on sensors: a review. *Sensors*. 2012;12:16937-16953. doi:10.3390/s121216937
- Wang Q, Yang J, Ren M, Zheng Y. Driver fatigue detection: a survey. *Proc World Congr Intell Control Autom*. 2006;2:8587-8591. doi:10.1109/WCICA.2006.1713656
- Rundo F, Rinella S, Massimino S, et al. An innovative deep learning algorithm for drowsiness detection from EEG signal. *Computation*. 2019;7:1-13. doi:10.3390/computation7010013
- May JF, Baldwin CL. Driver fatigue: the importance of identifying causal factors of fatigue when considering detection and countermeasure technologies. *Transp Res Part F Traffic Psychol Behav*. 2009;12:218-224. doi:10.1016/j.trf.2008.11.005
- Körber M, Cingel A, Zimmermann M, Bengler K. Vigilance decrement and passive fatigue caused by monotony in automated driving. *Procedia Manuf*. 2015;3:2403-2409. doi:10.1016/j.promfg.2015.07.499
- Thiffault P, Bergeron J. Monotony of road environment and driver fatigue: a simulator study. *Accid Anal Prev*. 2003;35:381-391. doi:10.1016/S0001-4575(02)00014-3
- Bougard C, Espié S, Larnaudie B, Moussay S, Davenne D. Effects of time of day and sleep deprivation on motorcycle-driving performance. *PLoS One*. 2012;7:e39735. doi:10.1371/journal.pone.0039735
- Philip P, Sagaspe P, Moore N, et al. Fatigue, sleep restriction and driving performance. *Accid Anal Prev*. 2005;37:473-478. doi:10.1016/j.aap.2004.07.007
- Okkes I, Oskam S, Lamberts H. The probability of specific diagnoses for patients presenting with common symptoms to Dutch family physicians. *J Fam Pract*. 2002;51:31-36.
- Stadje R, Dornieden K, Baum E, et al. The differential diagnosis of tiredness: a systematic review. *BMC Fam Pract*. 2016;147. doi:10.1186/S12875-016-0545-5
- Cathébras P. Abstracts and Reviews: 1. Jews: symptoms and social adjustment in Jewish depressives by R.A. Ball and A.W. Clare. *British Journal of Psychiatry* (1990), 156:379-383. *Transcult Psychiatry*. 1992; 29(3):244-246. doi:10.1177/136346159202900303
- Dawson D, Reid K. Fatigue, alcohol and performance impairment. *Nature*. 1997;388:235. doi:10.1038/40775
- Van Dongen HPA, Maislin G, Mullington JM, Dinges DF. The cumulative cost of additional wakefulness: Dose-response effects on neurobehavioral functions and sleep physiology from chronic sleep restriction and total sleep deprivation. *Sleep*. 2003;26:117-126. doi:10.1093/SLEEP/26.2.117

34. Borbely AA. A two-process model of sleep regulation. *Hum Neurobiol.* 1982;1:195-204.
35. Akerstedt T, Folkard S. Validation of the S and C components of the three-process model of alertness regulation. *Sleep.* 1995;18:1-6. doi:10.1093/sleep/18.1.1
36. Dinges DF. Critical research issues in development of bio-mathematical models of fatigue and performance. *Aviat Sp Environ Med.* 2004;75:A181-A191.
37. Belyavin AJ, Spencer MB. Modeling performance and alertness. The QinetiQ approach. *Aviat Sp Environ Med.* 2004;75:A93-A103.
38. Fox C, Hall V, Schaefer T, Wolford R. 407 EMF identification of emergency medicine fatigue at-risk periods using actigraphy and computer modeling: a pilot study. *Ann Emerg Med.* 2015;66:S146-S147. doi:10.1016/j.annemergmed.2015.07.444
39. Hursh SR, Redmond DP, Johnson ML, et al. Fatigue models for applied research in warfighting. *Aviat Space Environ Med.* 2004;75:A44-A53.
40. Cateni S, Colla V. Fuzzy inference system for data processing in industrial applications. *Fuzzy Inference System: Theory and Applications.* Vol 22. INTECH Open Access Publisher; 2012:61-69. doi:10.5772/35713
41. Devi MS, Bajaj PR. Fuzzy based driver fatigue detection. *Conference Proceedings—IEEE International Conference on Systems, Man and Cybernetics.* 2010; pp. 3139-3144. doi:10.1109/ICSMC.2010.5641788
42. Azim T, Jaffar MA, Mirza AM. Fully automated real time fatigue detection of drivers through fuzzy expert systems. *Appl Soft Comput J.* 2014;18:25-38. doi:10.1016/j.asoc.2014.01.020
43. Fan X, Yin BC, Sun YF. Yawning detection for monitoring driver fatigue. *2007 International Conference on Machine Learning and Cybernetics.* 2007; pp. 664-668. doi:10.1109/ICMLC.2007.4370228
44. Miao J, Yin B, Wang K, Shen L, Chen X. A hierarchical multiscale and multiangle system for human face detection in a complex background using gravity-center template. *Pattern Recognit.* 1999;32:1237-1248. doi:10.1016/S0031-3203(98)00156-3
45. Bunde MM, Banerjee R. An SVM classifier for fatigue-detection using skin conductance for use in the BITS-lifeguard wearable computing system. *2009 2nd International Conference on Emerging Trends in Engineering and Technology, ICETET.* 2009; pp. 934-939. doi:10.1109/ICETET.2009.29
46. Bunde MM. Identification of body parameters for changes in reflexes of a vehicular driver under drowsiness/fatigue/stress conditions. *Proceeding Front.* 2008:123-131.
47. Wang H, Zhou LB, Ying Y. A novel approach for real time eye state detection in fatigue awareness system. *2010 IEEE Conference on Robotics, Automation and Mechatronics.* 2010; pp. 528-532. doi:10.1109/RAMECH.2010.5513139
48. Huang J, Wechsler H. Visual routines for eye location using learning and evolution. *IEEE Trans Evol Comput.* 2000;4:73-82. doi:10.1109/4235.843496
49. Viola P, Jones M. Rapid object detection using a boosted cascade of simple features. *Proceedings of the IEEE Computer Society Conference on Computer Vision and Pattern Recognition.* 2001; pp. I-I. doi:10.1109/cvpr.2001.990517
50. Hu J, Min J. Automated detection of driver fatigue based on EEG signals using Gradient Boosting Decision Tree model. *Cogn Neurodyn.* 2018;12:431-440. doi:10.1007/s11571-018-9485-1
51. Garcés Correa A, Orosco L, Laciari E. Automatic detection of drowsiness in EEG records based on multimodal analysis. *Med Eng Phys.* 2014;36:244-249. doi:10.1016/j.medengphy.2013.07.011
52. Liang C, Li Y, Luo J. Single channel wireless EEG device for real-time fatigue level detection. *2015 International Joint Conference on Neural Networks (IJCNN).* 2015; pp. 1-5. doi:10.1109/IJCNN.2015.7280817
53. Du LH, Liu W, Zheng WL, Lu BL. Detecting driving fatigue with multimodal deep learning. *2017 8th International IEEE/EMBS Conference on Neural Engineering (NER).* 2017; pp. 74-77. doi:10.1109/NER.2017.8008295
54. Balandong RP, Ahmad RF, Mohamad Saad MN, Malik AS. A review on EEG-based automatic sleepiness detection systems for driver. *IEEE Access.* 2018;6:22908-22919. doi:10.1109/ACCESS.2018.2811723
55. Grauman K, Betke M, Gips J, Bradski GR. Communication via eye blinks - Detection and duration analysis in real time. *Proceedings of the IEEE Computer Society Conference on Computer Vision and Pattern Recognition.* 2001; pp. I-I. doi:10.1109/cvpr.2001.990641
56. Bouchner P. A complex analysis of the driver behavior from simulated driving focused on fatigue detection classification. 2005 WSEAS International Conference on Dynamical Systems and Control. 2006; Vol. 5, pp. 84-91. Accessed March 31, 2021. [https://www.researchgate.net/publication/290696281\\_A\\_complex\\_analysis\\_of\\_the\\_driver\\_behavior\\_from\\_simulated\\_driving\\_focused\\_on\\_fatigue\\_detection\\_classification](https://www.researchgate.net/publication/290696281_A_complex_analysis_of_the_driver_behavior_from_simulated_driving_focused_on_fatigue_detection_classification)
57. Sasikala PS, Wahidabanu RSD. Identification of individuals using electrocardiogram. *Int J Comput Sci Network Secur.* 2010;10:147-153.
58. Israel SA, Irvine JM, Cheng A, Wiederhold MD, Wiederhold BK. ECG to identify individuals. *Pattern Recognit.* 2005;38:133-142. doi:10.1016/j.patcog.2004.05.014
59. Ingre M, Akerstedt T, Peters B, Anund A, Kecklund G. Subjective sleepiness, simulated driving performance and blink duration: examining individual differences. *J Sleep Res.* 2006;15:47-53. doi:10.1111/j.1365-2869.2006.00504.x
60. Barr L, Popkin S, Howarth H. *An evaluation of emerging driver fatigue detection measures and technologies final report.* United States. Department of Transportation. Federal Motor Carrier Safety Administration. 2009. Accessed March 31, 2021. <https://rosap.ntl.bts.gov/view/dot/34394>
61. Jacobé de Naurois C, Bourdin C, Stratulat A, Diaz E, Vercher JL. Detection and prediction of driver drowsiness using artificial neural network models. *Accid Anal Prev.* 2019;126:95-104. doi:10.1016/j.aap.2017.11.038
62. Horne JA, Reyner LA. Sleep related vehicle accidents. *BMJ.* 1995;310:565-567. doi:10.1136/bmj.310.6979.565
63. Eskandarian A, Sayed R, Delaigue P, Mortazavi A, Blum J. Advanced driver fatigue research. *The National Academies of Sciences, Engineering, and Medicine.* 2007. Accessed March 31, 2021. <https://trid.trb.org/view/898430>
64. Jiao Y, Peng Y, Lu BL, Chen X, Chen S, Wang C. Recognizing slow eye movement for driver fatigue detection with machine learning approach. *Proc Int Jt Conf Neural Networks.* 2014;13:4035-4041. doi:10.1109/IJCNN.2014.6889615
65. Shi S-Y, Tang W-Z, Wang Y-Y. A review on fatigue driving detection. *The 4th Annual International Conference on Information Technology and Applications (ITA 2017).* 2017; Vol. 12, p. 7. doi:10.1051/itmconf/20171201019
66. Lal SKL, Craig A. A critical review of the psychophysiology of driver fatigue. *Biol Psychol.* 2001;55:173-194. doi:10.1016/S0301-0511(00)00085-5
67. Triyanti V, Iridiastadi H. Challenges in detecting drowsiness based on driver's behavior. *IOP Conf Ser Mater Sci Eng.* 2017;277:012042. doi:10.1088/1757-899X/277/1/012042

**How to cite this article:** Hooda R, Joshi V, Shah M. A comprehensive review of approaches to detect fatigue using machine learning techniques. *Chronic Dis Transl Med.* 2022;8:26-35. doi:10.1016/j.cdtm.2021.07.002