

POSTER PRESENTATION

Open Access

Multiplexed coding through synchronous and asynchronous spiking

Milad Lankarany^{1,2*}, Steven A Prescott^{1,2}

From 24th Annual Computational Neuroscience Meeting: CNS*2015
Prague, Czech Republic. 18-23 July 2015

The prodigious capacity of our brain to process information relies on efficient neural coding strategies. In engineered systems, bandwidth is often increased through multiplexing - multiple signals are simultaneously, yet independently, transmitted through a single communication channel. We have proposed previously that neural systems might implement the same sort of solution [1]. Here, we tested if/how multiplexed coding could be achieved through combined rate and temporal coding. We hypothesized that a set of neurons could independently encode two signals by using asynchronous spike rate to encode one signal and synchronous spike timing to encode the other.

To test our hypothesis, we built a feed-forward neural network comprising Morris-Lecar (ML) model neurons. All neurons received a common input constructed from

two distinct signals, slow and fast, plus uncorrelated fast noise. According to our hypothesis, slow and fast signals are independently encoded by different types of spikes; in other words, differentially correlated output spikes, namely, asynchronous (Async) and synchronous (Sync), enable encoding of slow and fast signals, respectively. To assess the feasibility of the multiplexed coding scheme, recorded spikes were classified into two independent classes based on the peristimulus time histogram (PSTH) calculated from the entire set of neurons. Spikes whose instantaneous rates exceeded a threshold were designated "Sync" and all others were designated "Async". The spike triggered average (STA) was calculated for slow and fast signals using Sync and Async spikes, resulting in four different STAs. The Async-slow and Sync-fast STAs were clearly structured whereas the other two were not (Figure 1A). Using

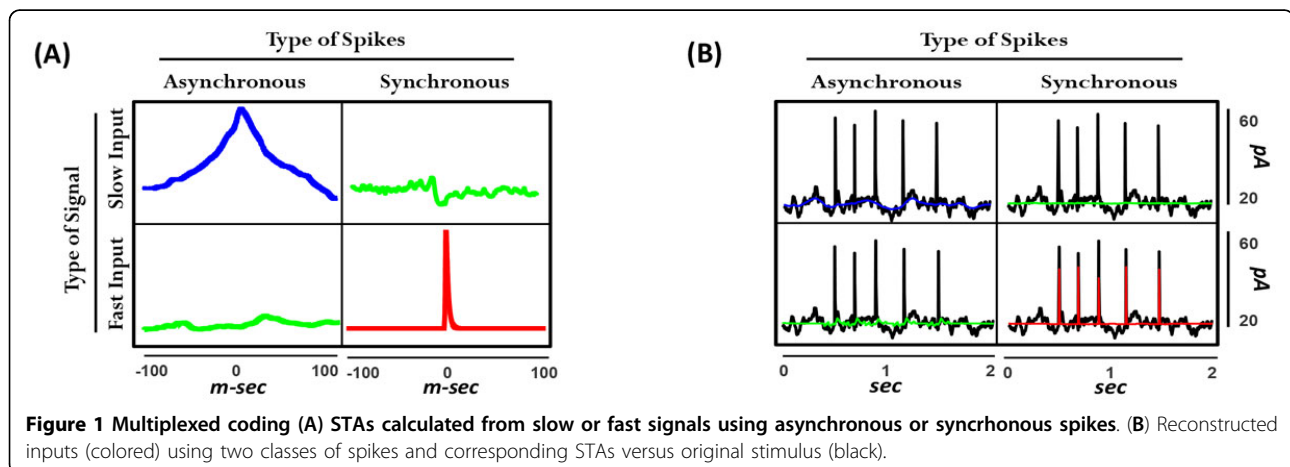


Figure 1 Multiplexed coding (A) STAs calculated from slow or fast signals using asynchronous or synchronous spikes. (B) Reconstructed inputs (colored) using two classes of spikes and corresponding STAs versus original stimulus (black).

* Correspondence: milad.lankarany@sickkids.ca

¹Neurosciences and Mental Health, The Hospital for Sick Children, Toronto, ON, Canada

Full list of author information is available at the end of the article

the two spike types to calculate STAs from the single combined fast-slow input gave two similarly structured STAs (meaning that one does not need *a priori* knowledge of which signal evokes which spikes) whereas treating all spikes as equivalent compromised STA measurement, especially for the fast signal (meaning that one needs to subdivide spikes according to their level of synchrony). Beyond simply measuring STAs, Figure 1B shows that convolving the appropriately measured STA with the synchronous or asynchronous spike train enables excellent reconstruction of the fast and slow signal, respectively.

Our results demonstrate the feasibility of multiplexed coding using synchronous and asynchronous spiking. Decoding the two signals requires that spikes are distinguished by their cross-correlation; this is difficult to do with experimental data in which only a subset of neurons are recorded, but it is straightforward for the brain using downstream neurons that operate as coincidence detectors or integrators that respond preferentially depending on input correlation.

Acknowledgements

This work was supported by the National Sciences and Engineering Research Council of Canada.

Authors' details

¹Neurosciences and Mental Health, The Hospital for Sick Children, Toronto, ON, Canada. ²Department of Physiology and Institute of Biomaterials and Biomedical Engineering, University of Toronto, Toronto, ON, Canada.

Published: 18 December 2015

Reference

1. Ratté S, Hong S, De Schutter E, Prescott SA: **Impact of neuronal properties on network coding: roles of spike initiation dynamics and robust synchrony transfer.** *Neuron* 2013, **78**(5):758-72.

doi:10.1186/1471-2202-16-S1-P198

Cite this article as: Lankarany and Prescott: **Multiplexed coding through synchronous and asynchronous spiking.** *BMC Neuroscience* 2015 **16**(Suppl 1):P198.

**Submit your next manuscript to BioMed Central
and take full advantage of:**

- Convenient online submission
- Thorough peer review
- No space constraints or color figure charges
- Immediate publication on acceptance
- Inclusion in PubMed, CAS, Scopus and Google Scholar
- Research which is freely available for redistribution

Submit your manuscript at
www.biomedcentral.com/submit

