



Article

# Fabrication and Histological Evaluation of Porous Carbonate Apatite Block from Gypsum Block Containing Spherical Phenol Resin as a Porogen

Yuta Sakemi <sup>1,\*</sup>, Koichiro Hayashi <sup>2</sup>, Akira Tsuchiya <sup>2</sup>, Yasuharu Nakashima <sup>1</sup> and Kunio Ishikawa <sup>2</sup>

- Department of Orthopedic Surgery, Graduate School of Medical Sciences, Kyushu University, 3-1-1 Maidashi, Higashi-ku, Fukuoka 812-8582, Japan; yasunaka@ortho.med.kyushu-u.ac.jp
- Department of Biomaterials, Faculty of Dental Science, Kyushu University, 3-1-1 Maidashi, Higashi-ku, Fukuoka 812-8582, Japan; khayashi@dent.kyushu-u.ac.jp (K.H.); tsuchiya@dent.kyushu-u.ac.jp (A.T.); ishikawa@dent.kyushu-u.ac.jp (K.I.)
- \* Correspondence: sakemi@ortho.med.kyushu-u.ac.jp; Tel.: +81-92-642-5487; Fax: +81-92-642-5507

Received: 18 October 2019; Accepted: 28 November 2019; Published: 2 December 2019



**Abstract:** The utility of carbonate apatite ( $CO_3Ap$ ) as a bone substitute has been demonstrated. The feasibility of fabricating macroporous  $CO_3Ap$  was evaluated through a two-step dissolution–precipitation reaction using gypsum as the precursor and spherical phenol resin as the porogen. Porogen-containing gypsum was heated to burn out the porogen and to fabricate macroporous structures. Gypsum transformed into  $CaCO_3$  upon immersion in a sodium carbonate solution, while maintaining its macroporous structure. Next,  $CaCO_3$  transformed into  $CO_3Ap$  upon immersion in a  $Na_2HPO_4$  solution while maintaining its macroporous structure. The utility of the macroporous  $CO_3Ap$  for histologically reconstructing bone defects was evaluated in rabbit femurs. After 4 weeks, a much larger bone was formed inside the macroporous  $CO_3Ap$  than that inside non-macroporous  $CO_3Ap$  and macroporous hydroxyapatite (HAp). A larger amount of bone was observed inside non-macroporous  $CO_3Ap$  than inside macroporous  $CO_3Ap$ . In conclusion, macroporous  $CO_3Ap$  has good potential as an ideal bone substitute.

**Keywords:** carbonate apatite; porous structure; bone regeneration; bone graft; osteoconduction

## 1. Introduction

In orthopedic surgery, bone grafts have been used for the treatment of pseudarthrosis or bone defects due to bone fracture or tumor resection. Autograft is still the gold standard. However, although autografts possess good osteoconduction and osteoinduction and induce osteogenesis without causing an immunological response, more skin incision is required and bone harvest is limited [1–4]. Therefore, artificial bone substitutes are often used to fill bone defects in combination with or without autografts.

Hydroxyapatite (Hap;  $Ca_{10}(PO_4)_6(OH)_2$ ) has been widely used as an artificial bone substitute because it exhibits high tissue compatibility and good osteoconduction. Contrary to autografts, HAp is hardly absorbed at the bone defect and remains there for a long time [5]. It should be noted that the inorganic component of the bone is not pure HAp but AB-type carbonate apatite ( $CO_3Ap$ ;  $Ca_{10-a}(PO_4)_{6-b}(CO)_c$ ), which contains 4–9% carbonate ions ( $CO_3^{2-}$ ) in an apatitic structure [6]. In addition, resorption is known to be quicker with an increase in substitution of  $CO_3^{2-}$  at the A-site or OH site and/or at the B-site or  $PO_4$  site [7]. Furthermore, compared to the crystal structure of HAp, the structure of  $CO_3Ap$  more closely resembles bone apatite [8]. Thus,  $CO_3Ap$  is expected to be an ideal bone substitute.

Recently,  $CO_3Ap$  blocks have been fabricated in aqueous solution through a dissolution–precipitation reaction using precursor blocks such as  $CaCO_3$  [9–16], dicalcium phosphate dihydrate ( $CaHPO_4 \cdot 2H_2O$ ) [17,18],  $\alpha \cdot Ca_3(PO_4)_2$  [19–24], and  $CaSO_4$  [25–28]. The fabrication of  $CO_3Ap$  blocks occurs through a simple process. Upon immersion in an aqueous  $Na_2HPO_4$  solution, the  $CaCO_3$  block dissolves and releases  $Ca^{2+}$  and  $CO_3^{2-}$  into the aqueous solution. No further reaction will occur in the absence of other ions. However, when the solution contains phosphate, it becomes supersaturated with respect to  $CO_3Ap$ . Therefore,  $Ca^{2+}$  and  $CO_3^{2-}$  released from  $CaCO_3$  are precipitated as  $CO_3Ap$  in the phosphate solution. As a consequence of this dissolution–precipitation reaction, the  $CaCO_3$  block becomes a  $CO_3Ap$  block while maintaining its macroscopic structure. The fabricated  $CO_3Ap$  block thus shows properties similar to the properties of the bone. In contrast to sintered HAp, which is not resorbed by osteoclasts,  $CO_3Ap$  blocks are resorbed by osteoclasts and they can serve as a new bone replacement [9,29–31]. Furthermore,  $CO_3Ap$  blocks were found to upregulate osteoblastic differentiation and they showed a much higher osteoconductivity than HAp [32].

The structural properties of bone substitutes including porosity, pore size, interconnectivity, and geometry are important factors that govern their bone regeneration ability [33,34]. Macropores with diameters greater than  $100 \, \mu m$  ensure nutrient supply, cell colonization, and metabolic waste transport [35]. Porous  $CO_3Ap$  blocks are expected to exhibit superior bone regeneration ability compared to current dense  $CO_3Ap$  bone substitutes. Among various precursors for the fabrication of  $CO_3Ap$  blocks, gypsum (CaSO<sub>4</sub>) is unique since it shows self-setting ability, which enables it to be shaped into any structure, and it maintains stability at high temperatures, which are required to burn out polymeric porogens.

The objective of this investigation was to evaluate the feasibility of fabricating porous  $CO_3Ap$  blocks using gypsum and polymeric porogens and to explore their utility with respect to physical and histological properties.

#### 2. Materials and Methods

## 2.1. Fabrication of Cylindrical CO<sub>3</sub>Ap and HAp Blocks

Cylindrical porous  $CO_3Ap$  blocks (6 mm in diameter and 3 mm in thickness) were fabricated using calcium sulfate hemihydrate ( $CaSO_4\cdot 1/2H_2O$ , Wako Pure Chemical Industries Ltd., Osaka, Japan) and spherical phenol resin (LPS-C100; Lygnyte Inc., Osaka, Japan), with an average diameter of 100  $\mu$ m by compositional transformation through dissolution–precipitation reactions, which converted  $CaSO_4$  to  $CaCO_3$  and  $CaCO_3$  to  $CO_3Ap$ .

 $\text{CaSO}_4\cdot 1/2\text{H}_2\text{O}$  powder and spherical phenol resin were mixed so that the proportion of spherical phenol resin was 30% and 40% by mass. The mixture or  $\text{CaSO}_4\cdot 1/2\text{H}_2\text{O}$  powder alone was further mixed with distilled water at a water-to-powder ratio of 0.23. The paste thus prepared was packed into a split plastic mold (6 mm in diameter and 3 mm in height), and both sides were covered with glass plates and kept at room temperature for 3 h for hardening. The hardened sample was heated to 700 °C at a rate of 0.13 °C/min and maintained at 700 °C for 3 h to burn out the spherical phenol resin.

The CaSO<sub>4</sub> blocks were then immersed in a solution of 2 mol/L sodium carbonate (Na<sub>2</sub>CO<sub>3</sub>) and 2 mol/L sodium hydrogen carbonate (NaHCO<sub>3</sub>) adjusted to pH 9 at 90 °C for 24 h to fabricate CaCO<sub>3</sub> blocks through the dissolution–precipitation reaction using CaSO<sub>4</sub> blocks as the precursor. The solution is denoted as Na–H–CO<sub>3</sub> in the remainder of the text.

Next,  $CaCO_3$  blocks were immersed in 1 mol/L disodium hydrogen phosphate ( $Na_2HPO_4$ ) at 80 °C for three weeks to fabricate  $CO_3Ap$  blocks through the dissolution–precipitation reaction using  $CaCO_3$  blocks as a precursor.

Cylindrical porous HAp blocks (6 mm in diameter and 3 mm in height) were fabricated as a control. HAp powder (HAP-200; Taihei Chemicals, Saitama, Japan) was mixed with spherical phenol resin porogens so that the mass proportion of the porogens was 40%. The mixture was pressed at 20 MPa with a stainless-steel mold using an oil pressure press machine (MT-50HD; NPa System,

Materials **2019**, 12, 3997 3 of 16

Saitama, Japan). The compacts were heated at  $0.13\,^{\circ}\text{C/min}$  to  $1000\,^{\circ}\text{C}$  and maintained at  $1000\,^{\circ}\text{C}$  for 3 h in an electronic furnace (SBV-1515D; Motoyama, Osaka, Japan) to burn out the porogens and to sinter the HAp powder. The mass content of spherical phenol resin in the original precursor is stated in parentheses. For example, CO<sub>3</sub>Ap (30%) indicates that the CO<sub>3</sub>Ap block was made using 30% spherical phenol resin by mass in the raw material, i.e., CaSO<sub>4</sub>·1/2H<sub>2</sub>O.

#### 2.2. Characterization of Samples

The composition of the samples was analyzed by X-ray diffraction (XRD), Fourier transform infrared (FT-IR) spectroscopy, and elemental analysis. XRD patterns were recorded using a powder X-ray diffractometer (D8 Advance A25; Bruker AXS GmbH, Karlsruhe, Germany) with CuK $\alpha$  radiation operated at a tube voltage of 40 kV and a tube current of 40 mA during continuous scanning at 2 $\theta$ , ranging from 10 $^{\circ}$  to 40 $^{\circ}$  at a scanning rate of 2 $^{\circ}$ /min. FT-IR spectra were measured by a KBr disc method using a spectrometer (SPECTRUM 2000LX; Perkin Elmer Co. Ltd., Kanagawa, Japan).

The surface morphologies of the CO<sub>3</sub>Ap and HAp blocks were observed using a scanning electron microscope (SEM) (S-3400N; Hitachi High-Technologies, Tokyo, Japan) at an accelerating voltage of 15 kV after applying a gold–palladium coating with a magnetron sputtering machine (MSP-1S; Vacuum Device Co., Ibaraki, Japan).

The distribution of the interconnected pore size was evaluated through the penetration of Hg vapor using porosimetry.

The overall porosity was calculated by dividing the apparent density of the sample  $(d_{samp})$  by the theoretical density of HAp  $(d_{HAp})$ , as shown below in Equation (1).

Porosity (%) = 
$$100 - 100 (d_{samp}/d_{HAp})$$
 (1)

The mechanical strength of the samples was evaluated in terms of diametral tensile strength (DTS). The diameter and height of each sample were measured using a micrometer (MDC-25M; Mitutoyo Co. Ltd., Kanagawa, Japan). A load was applied to crush each sample in a universal testing machine (AGS-J; Shimadzu Corp., Kyoto, Japan) at a crosshead speed of 1 mm/min. Each DTS value represents the mean of at least eight samples.

## 2.3. Surgical Procedure

Sixteen 18-week-old white, male Japanese rabbits with an average weight of 3.1 kg (Japan SLC Inc., Hamamatsu, Japan) were subjected to animal studies. The experiments were conducted according to the Guide for the Care and Use of Laboratory Animals, National Research Council, USA; the protocols were approved by the Animal Care and Use Committee of Kyushu University (approval number A-28-144-1). The  $\rm CO_3Ap$  and  $\rm HAp$  blocks were sterilized by heating at 170 °C for 3 h.

The rabbits were anesthetized by intramuscular injection of ketamine-xylazine (35–10 mg/kg). A medial longitudinal skin incision was made at the distal femur of both legs, and the medial epicondyle of the femur was exposed. A 5.8 mm hole was drilled into the epiphysis of the distal femur and extended to 6 mm. After the  $CO_3Ap$  and HAp blocks were inserted, the periosteum, fascia, and skin were closed by suturing. All animals were allowed unrestrained movement after recovery from anesthesia.

## 2.4. Image Analysis

Four and twelve weeks after implantation, the rabbits were euthanized and the distal femurs were harvested (n = 4 in each group) while removing the surrounding soft tissue. The distal femur including the  $CO_3Ap$  and HAp blocks were scanned using micro-computed tomography ( $\mu$ -CT) (Skyscan 1075 KHS; Skyscan, Kontich, Belgium) at a source voltage of 60 kV and a source current of 170  $\mu$ A with a 0.5 mm aluminum filter. Slices obtained from  $\mu$ -CT measurements were used to reconstruct 2D and 3D images using analysis software. The volume of the remaining blocks was

Materials **2019**, 12, 3997 4 of 16

calculated by quantitative 3D evaluation. Before implantation, the volume of each block was calculated using its diameter and thickness. The residual rate (%) was calculated using Equation (2).

Residual rate (%) = (volume of remaining block/volume of block before implantation) 
$$\times$$
 100 (2)

The trabecular thickness (Tb, Th) and trabecular number (Tb, N) were analyzed using software provided with the  $\mu$ -CT scanner. The trabecular thickness and trabecular number were calculated using Equations (3) and (4), respectively.

Tb, Th = 
$$2 \times \text{bone volume (BV)/bone surface (BS)}$$
 (3)

Tb, 
$$N = BV/(total\ tissue\ volume \times Tb$$
, Th) (4)

## 2.5. Histological Procedures

The obtained samples were fixed with a solution containing 4% paraformal dehyde and 5% glutaraldehyde in 0.1 mol/L phosphate-buffered saline at pH 7.4 for one week. After decal cification with Plank–Rychlo (FUJIFILM Wako Pure Chemical Corporation, Osaka, Japan) solution for 24 h, the samples were dehydrated by a graded series of ethanol and N-butyl glycidyl ether followed by embedding in an epoxy resin (Quetol 651; Nisshin EM, Tokyo, Japan). The samples were sectioned at a thickness of 1  $\mu$ m using an ultramic rotome (ULTRACUT S; Reichert-Nissei, Tokyo Japan), followed by staining with hematoxylin and eosin (H&E). Next, the specimens were examined under a microscope (BZ-X710; KEYENCE, Osaka, Japan) to detect grafted material and new bone formation. The amount of new bone was estimated as a percentage of the sample insertion area using a BZX analyzer attached to the microscope.

#### 2.6. Statistical Analysis

The Mann–Whitney U test was performed to assess the difference in the residual rate, new bone formation, trabecular thickness, and trabecular number. Significant difference was defined as p < 0.05. Statistical analyses were performed using the JMP software (Version 12.0; SAS Institute, Cary, NC, USA).

#### 3. Results


Figure 1 shows the SEM images of  $CaSO_4$  blocks before (Figure 1a–c) and after immersion in Na–H–CO $_3$  (Figure 1d–f) and Na $_2$ HPO $_4$  solution (Figure 1g–i). The macrostructure of the samples was the same before and after immersion in Na–H–CO $_3$  and Na $_2$ HPO $_4$  solutions, whereas the microstructure was different. Needle-like crystals typical of  $CaSO_4$  were observed before immersion. When the  $CaSO_4$  blocks were immersed in Na–H–CO $_3$  solution, rhombohedral and hexagonal crystals were observed. When the samples were further immersed in Na $_2$ HPO $_4$  solution, fine aggregated crystals were observed.

Figure 2 summarizes the pore size distribution measured by mercury intrusion porosimetry. In the case of CO<sub>3</sub>Ap (30%) and CO<sub>3</sub>Ap (40%), interconnected pores with diameters of 5–30  $\mu$ m were fabricated in addition to pores that were 0.2–2  $\mu$ m in diameter, which were observed also in CO<sub>3</sub>Ap (0%).

Figure 3 summarizes the XRD patterns of CaSO<sub>4</sub> blocks before (Figure 3a) and after immersion in Na–H–CO<sub>3</sub> (Figure 3b) and Na<sub>2</sub>HPO<sub>4</sub> solution (Figure 3c) and those of sintered HAp blocks (Figure 3d). The XRD patterns of standard CaSO<sub>4</sub> (Figure 3e) and CaCO<sub>3</sub> (Figure 3f) are also presented for comparison. As shown in this Figure, CaCO<sub>3</sub> blocks were fabricated through the dissolution–precipitation reaction when CaSO<sub>4</sub> blocks were immersed in Na–H–CO<sub>3</sub> solution. Next,

Materials **2019**, 12, 3997 5 of 16

apatite blocks were fabricated through the dissolution–precipitation reaction when  $CaCO_3$  blocks were immersed in  $Na_2HPO_4$  solution (data not shown).

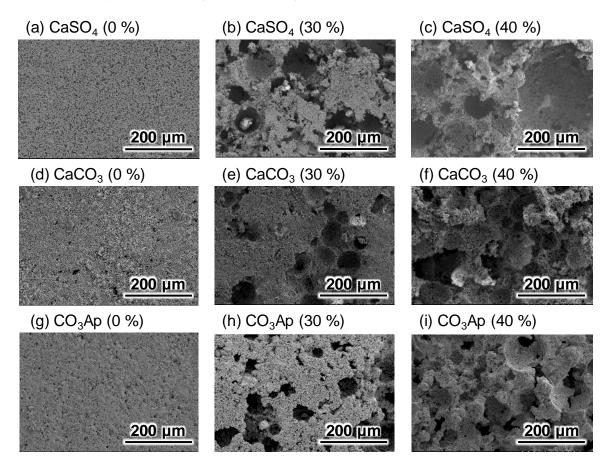

**Figure 1.** SEM images of gypsum (CaSO<sub>4</sub>) blocks ( $\mathbf{a}$ - $\mathbf{c}$ ), CaCO<sub>3</sub> blocks ( $\mathbf{d}$ - $\mathbf{f}$ ), and carbonate apatite (CO<sub>3</sub>Ap) blocks ( $\mathbf{g}$ - $\mathbf{i}$ ).


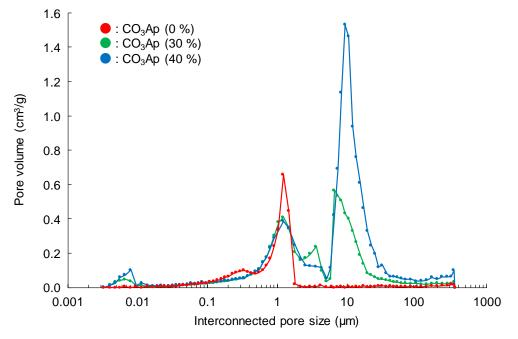


Figure 2. Pore size distribution of CO<sub>3</sub>Ap blocks measured by mercury intrusion porosimetry.

Materials **2019**, 12, 3997 6 of 16

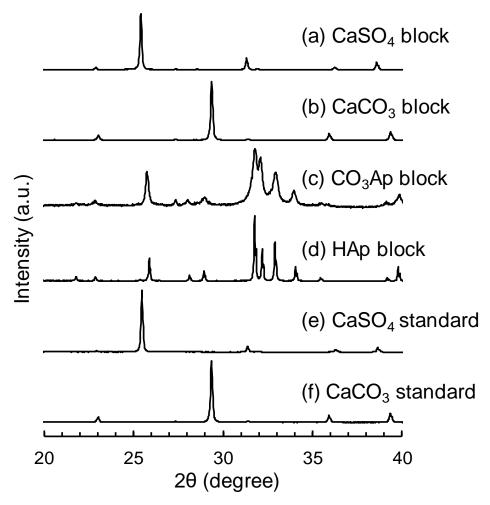


**Figure 3.** XRD patterns of (**a**) CaSO<sub>4</sub> block, (**b**) CaCO<sub>3</sub> block, (**c**) CO<sub>3</sub>Ap block, and (**d**) hydroxyapatite (HAp) block compared to XRD patterns of (**e**) CO<sub>3</sub>Ap powder and (**f**) CaCO<sub>3</sub> block.

Apatite blocks fabricated in  $Na_2HPO_4$  solution using  $CaCO_3$  blocks as a precursor exhibited broader peaks compared with the peaks for sintered HAp, indicating that the crystallinity of apatite formed in the  $Na_2HPO_4$  solution was lower or closer to that of bone apatite. The XRD patterns were the same regardless of the amount of added spherical phenol resin.

Figure 4 summarizes the FT-IR spectra of CaSO<sub>4</sub> blocks before (Figure 4a) and after immersion in Na–H–CO<sub>3</sub> (Figure 4b) and Na<sub>2</sub>HPO<sub>4</sub> solution (Figure 4c) and those of sintered HAp blocks (Figure 4d). The FT-IR spectra of standard CaSO<sub>4</sub> (Figure 4e) and CaCO<sub>3</sub> (Figure 4f) are also presented for comparison. When CaCO<sub>3</sub> blocks were immersed in Na<sub>2</sub>HPO<sub>4</sub> solution, the appearance of CO<sub>3</sub> peaks that were attributed to AB-type CO<sub>3</sub>Ap ( $\blacktriangle$ ) [36,37] indicated that AB-type CO<sub>3</sub>Ap was formed. No absorption peak due to apatitic OH was found. In contrast, sintered HAp exhibited absorption peaks attributed to OH ( $\vartriangle$ ), but no peaks attributed to apatitic CO<sub>3</sub> were observed.

The porosity and DTS values of  $CaSO_4$ ,  $CaCO_3$ ,  $CO_3Ap$ , and HAp blocks are summarized in Table 1. The porosity of these blocks decreased with increase in the amount of spherical phenol resin added. The porosity of  $CaCO_3$  blocks was higher compared to those of  $CaSO_4$  and  $CO_3Ap$  blocks regardless of the amount of spherical phenol resin added because of the presence of micropores in addition to macropores. The DTS value decreased with increasing porosity. The DTS value of the  $CaCO_3$  blocks was lower than that of the  $CaSO_4$  blocks, while that of the  $CoSO_4$  blocks was higher than that of the  $CaCO_3$  blocks.

Materials **2019**, 12, 3997 7 of 16

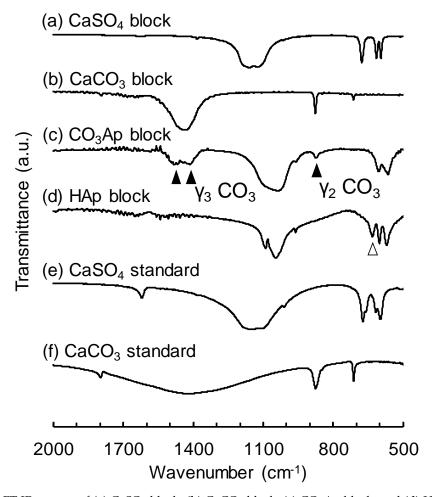

**Figure 4.** FT-IR spectra of (a) CaSO<sub>4</sub> block, (b) CaCO<sub>3</sub> block, (c) CO<sub>3</sub>Ap block, and (d) HAp block compared to X-ray diffraction (XRD) patterns of (e) CO<sub>3</sub>Ap powder and (f) CaCO<sub>3</sub>.

**Table 1.** Porosity and diametral tensile strength (DTS) of  $CO_3Ap$  and HAp blocks used in this study. LPS: spherical phenol resin.

LPS (Mass %)	Porosity (%)				DTS (MPa)			
	CaSO <sub>4</sub>	CaCO <sub>3</sub>	$CO_3Ap$	HAp	$CaSO_4$	CaCO <sub>3</sub>	$CO_3Ap$	HAp
0	$37.1 \pm 2.4$	$49.0 \pm 1.0$	$48.8 \pm 4.5$	-	$3.4 \pm 0.5$	$2.3 \pm 0.4$	$3.5 \pm 0.3$	-
30	$66.7 \pm 1.8$	$71.4 \pm 1.3$	$67.5 \pm 0.7$	-	$0.8 \pm 0.2$	$0.3 \pm 0.1$	$1.4 \pm 0.2$	-
40	$73.2 \pm 0.8$	$79.1 \pm 1.0$	$75.8 \pm 0.9$	$64.2 \pm 1.0$	$0.5 \pm 0.1$	$0.2 \pm 0.1$	$0.7 \pm 0.1$	$1.8 \pm 0.3$

Figures 5 and 6 summarize the  $\mu$ -CT observations for CO<sub>3</sub>Ap (5a–c, 5e–g, 6a–c, 6e–g) and HAp blocks (5d, 5h, 6d, 6h) in the sagittal (5a–d, 6a–d) and coronal planes (5e–h, 6e–h) at 4 and 12 weeks, respectively. The edges of CO<sub>3</sub>Ap (30%) and CO<sub>3</sub>Ap (40%) were rounded at 4 weeks after implantation, whereas the CO<sub>3</sub>Ap (0%) and HAp (40%) blocks had a rectangular shape even at 12 weeks in the coronal plane. At 12 weeks, both CO<sub>3</sub>Ap (30%) and CO<sub>3</sub>Ap (40%) were resorbed almost completely and replaced with new bone. Spotty high-density regions were observed in CO<sub>3</sub>Ap (30%) and CO<sub>3</sub>Ap (40%) at 4 weeks and in CO<sub>3</sub>Ap (0%) at 12 weeks, particularly on the cancellous bone side. This suggested that osteointegration occurred earlier in CO<sub>3</sub>Ap (30%) and CO<sub>3</sub>Ap (40%) compared to that in the CO<sub>3</sub>Ap (0%) and HAp blocks (40%). Additionally, a greater amount of spotty high-density regions was found on the cancellous bone side than at the cortex. In contrast, spotty low-density regions were formed in the HAp blocks at 12 weeks after implantation.

Materials **2019**, 12, 3997 8 of 16

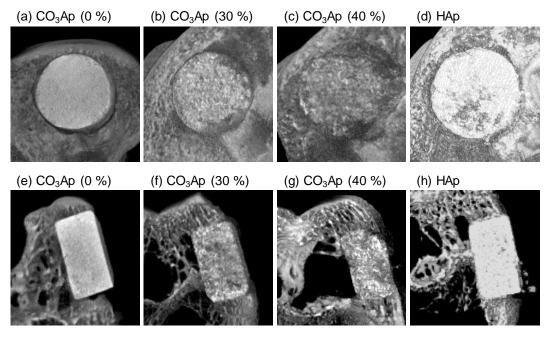


Figure 5. Micro-computed tomography ( $\mu$ -CT) images of ( $\mathbf{a}$ - $\mathbf{c}$ , $\mathbf{e}$ - $\mathbf{g}$ ) CO<sub>3</sub>Ap blocks and ( $\mathbf{d}$ , $\mathbf{h}$ ) HAp blocks at 4 weeks after implantation in the ( $\mathbf{a}$ - $\mathbf{d}$ ) sagittal plane and ( $\mathbf{e}$ - $\mathbf{h}$ ) coronal plane of the rabbits' distal femurs.


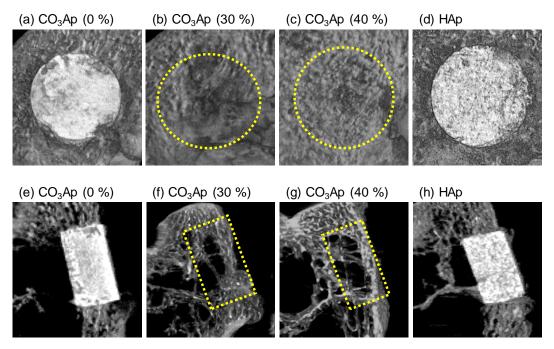


Figure 6.  $\mu$ -CT images of ( $\mathbf{a}-\mathbf{c},\mathbf{e}-\mathbf{g}$ ) CO<sub>3</sub>Ap blocks and ( $\mathbf{d},\mathbf{h}$ ) HAp blocks at 12 weeks after implantation in the ( $\mathbf{a}-\mathbf{d}$ ) sagittal plane and ( $\mathbf{e}-\mathbf{h}$ ) coronal plane of the rabbits' distal femurs: Yellow dotted lines indicate the implant insertion portions.


Figure 7 shows the amount of residual materials in the  $CO_3$ Ap and HAp blocks. The amounts of residual  $CO_3$ Ap (30%) and  $CO_3$ Ap (40%) were statistically lower (p < 0.05) than those of  $CO_3$ Ap (0%) and HAp (40%). In addition, the amount of remaining  $CO_3$ Ap (0%) was statistically lower (p < 0.05) than that of HAp (40%).  $CO_3$ Ap (30%) and  $CO_3$ Ap (40%) blocks were almost completely resorbed at 12 weeks after implantation.

Materials **2019**, 12, 3997 9 of 16

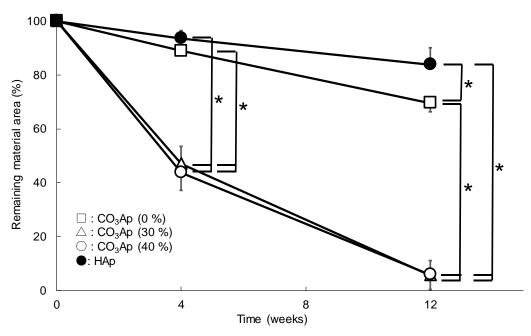


**Figure 7.** Remaining material area (%) in the defect at 4, 8, and 12 weeks after implantation of  $CO_3Ap$  and HAp blocks (\*p < 0.05).

Figures 8 and 9 summarize the H&E-stained histological images of the distal femurs 4 and 12 weeks after implantation. At 4 weeks, new bone was found on the surface of all  $CO_3Ap$  samples, demonstrating the good osteoconductivity of  $CO_3Ap$ . A small amount of new bone was also found on the surface of HAp (40%), indicating that HAp also exhibited osteoconductivity, even though the degree of osteoconductivity was limited for HAp compared with that for  $CO_3Ap$ .

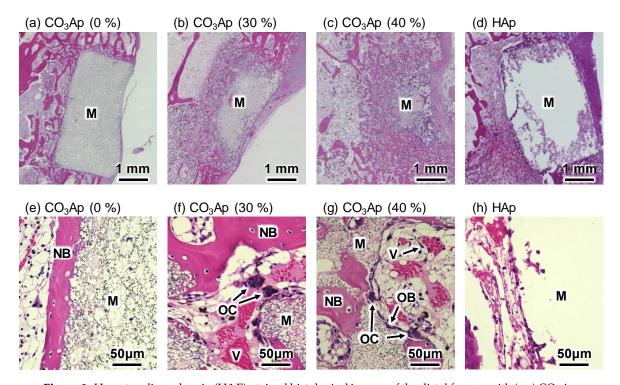

**Figure 8.** Hematoxylin and eosin (H&E)-stained histological images of the distal femurs with (**a**,**e**) CO<sub>3</sub>Ap (0%), (**b**,**f**) CO<sub>3</sub>Ap (30%), (**c**,**g**) CO<sub>3</sub>Ap (40%), and (**d**,**h**) HAp blocks at 4 weeks after implantation. M: material; NB: new bone; OB: osteoblast; OC: osteoclast; V: vessel-like tissue.

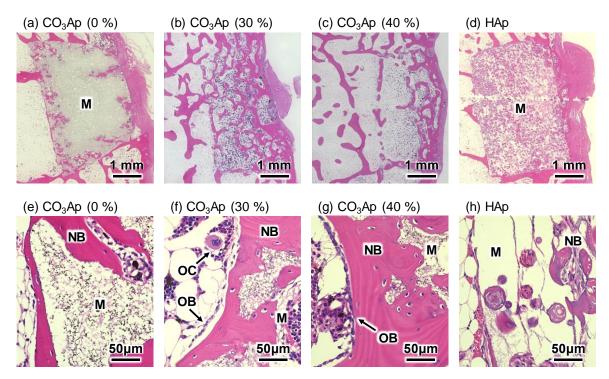

**Figure 9.** H&E stained histological images of the distal femurs including (**a**,**e**) CO<sub>3</sub>Ap blocks (0%), (**b**,**f**) (30%), (**c**,**g**) (40%), and (**d**,**h**) HAp blocks at 12 weeks after implantation. M: material, NB; new bone, OB; osteoblast, OC; osteoclast.


For macroporous  $CO_3Ap$  or  $CO_3Ap$  (30%) and  $CO_3Ap$  (40%), tissues including new bone were formed inside the  $CO_3Ap$  block. A much greater amount of tissues and cells including new bone, vessels, and red blood cells were found inside the  $CO_3Ap$  (40%) block compared to those found in the  $CO_3Ap$  (30%) block. In the case of  $CO_3Ap$  (0%), no tissue penetration was observed at this stage. In the case of HAp (40%), fibrous tissue penetration was observed, whereas no bone tissue was seen inside the block.

Osteoclasts were also found inside the CO<sub>3</sub>Ap (30%) and CO<sub>3</sub>Ap (40%) blocks, and resorption occurred well from the trabecular bone side.


At 12 weeks, almost all the  $CO_3Ap$  (30%) and  $CO_3Ap$  (40%) blocks were resorbed. Moreover, the original trabecular structure was reconstructed, indicating that remodeling was completed within 12 weeks. New bone was also found inside the  $CO_3Ap$  (0%) and HAp (40%) blocks. As can be seen in Figure 9h, new bone was spherical and stained more strongly by hematoxylin in the case of HAp (40%).

Figure 10 illustrates the amount of new bone as a function of implantation period. The largest bone was formed in the case of  $CO_3Ap$  (40%), followed by  $CO_3Ap$  (30%) at 4 weeks. At 12 weeks after implantation, the amount of new bone inside the sample was increased compared with that at 4 weeks, except for that in  $CO_3Ap$  (40%).

Figure 11 shows the trabecular thickness (Tb, Th) and trabecular number (Tb, N) calculated in the implant insertion portions at 12 weeks to estimate the remodeling of new bone. At the trabecular bone of the femur epicondyle, femur Tb, Th and Tb, N were calculated as a control (Figure 8). There was no significant difference between Tb, Th and Tb, N in the implant insertion portion and that in the lateral side. This indicated that remodeling was almost complete within 12 weeks in the cases of  $CO_3Ap$  (30%) and  $CO_3Ap$  (40%) blocks.

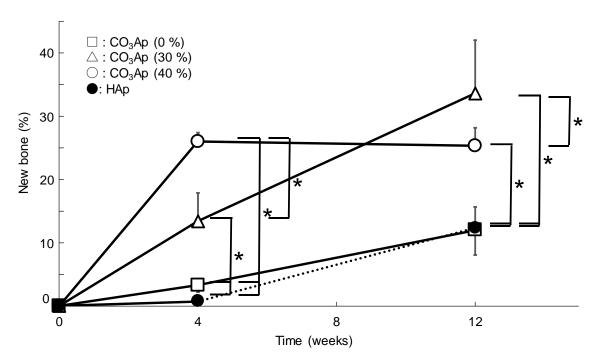

**Figure 10.** New bone area (%) in the defect at 4, 8, and 12 weeks after implantation of  $CO_3Ap$  and HAp blocks (\*p < 0.05).

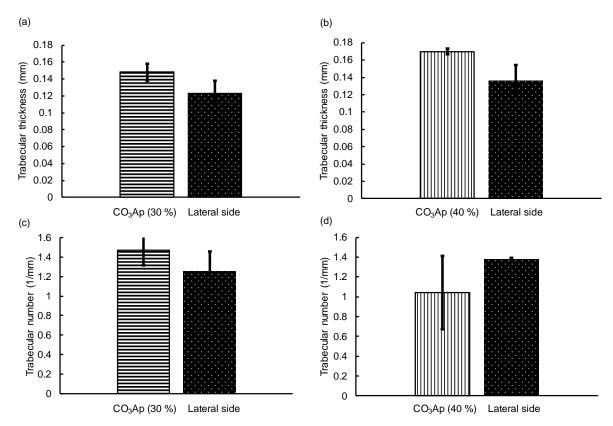

**Figure 11.** (**a**,**b**) Trabecular thickness and (**c**,**d**) trabecular number of the inserted portions of (**a**,**c**)  $CO_3Ap$  (30%) and (**b**,**d**)  $CO_3Ap$  (40%) blocks and the lateral side of the distal femurs.

## 4. Discussion

The results obtained in this study clearly demonstrated that porous  $CaSO_4$  blocks can be fabricated by heating the set  $CaSO_4 \cdot 2H_2O$  containing spherical porogens since  $CaSO_4$  blocks are stable

even at 700 °C. Porous  $CO_3Ap$  blocks were fabricated through dissolution–precipitation reactions using  $CaSO_4$  blocks while maintaining the latter's macroscopic structure. First, the  $CaSO_4$  block transformed into  $CaCO_3$  while maintaining its macroscopic structure when immersed in Na–H– $CO_3$  solution (Figures 1, 3 and 4). Next, the  $CaCO_3$  block transformed into  $CO_3Ap$  while maintaining its macroscopic structure when immersed in  $Na_2HPO_4$  solution. The  $CO_3Ap$  fabricated in this study was AB-type  $CO_3Ap$  or  $CO_3Ap$  found in the human bone. Notably, compared to HAp, this  $CO_3Ap$  is more similar to bone apatite not only with respect to composition but also with respect to crystallinity. Both types of  $CO_3Ap$ , i.e., bone apatite and  $CO_3Ap$ , fabricated in this study are formed in an aqueous solution, whereas HAp is fabricated in an electronic furnace by sintering at high temperature. Therefore, the crystallinity of  $CO_3Ap$  is close to that of bone apatite whereas that of HAp is extremely high, as shown in Figure 3. The dissolution–precipitation procedure is simple and enables the fabrication of artificial bone substitutes that are similar to bone in terms of composition and crystallinity.

The porosity and DTS were controllable by adjusting the amount of spherical phenol resin added. The DTS values of  $CO_3Ap$  (0%),  $CO_3Ap$  (30%), and the HAp block were 3.5  $\pm$  0.3 MPa, 1.4  $\pm$  0.2 MPa, and 1.8  $\pm$  0.3 MPa, respectively. Kopperdahl and Keaveny reported that the DTS of the human trabecular bone lies between 1.3–3.5 MPa [38]. Thus, the DTS values of  $CO_3Ap$  (0%),  $CO_3Ap$  (30%), and the HAp block are nearly equal to that of human trabecular bone.

In addition, the histological results obtained in this study demonstrated the utility of microporous structures. Although CO<sub>3</sub>Ap (0%) was gradually replaced by new bone (Figure 10), the process took time. As shown in Figure 2, only micropores smaller than 2 μm were observed in the case of CO<sub>3</sub>Ap (0%). These micropores may be useful in facilitating osteoclastic resorption by decreasing the density of CO<sub>3</sub>Ap. However, they are too small for cells to penetrate the interior of the sample. Thus, osteoclasts need to resorb CO<sub>3</sub>Ap from the surface of the block, followed by new bone formation by osteoblasts. In contrast, macropores that are 5– $100 \, \mu m$  in diameter are present in addition to micropores (smaller than 2 µm) in CO<sub>3</sub>Ap (30%) and CO<sub>3</sub>Ap (40%) blocks. The macropores allow cells and tissues to penetrate the interior of the sample. Although both CO<sub>3</sub>Ap (30%) and CO<sub>3</sub>Ap (40%) have macropores, more tissues penetrated CO<sub>3</sub>Ap (40%). As shown in Figure 8, tissues penetrated from the trabecular bone but not from the periosteum side. Due to cell and tissue penetration, replacement of CO<sub>3</sub>Ap by new bone, similar to remodeling, was remarkable for CO<sub>3</sub>Ap (30%) and CO<sub>3</sub>Ap (40%). At 4 weeks, the remaining CO<sub>3</sub>Ap (30%) and CO<sub>3</sub>Ap (40%) was approximately one fifth of that of CO<sub>3</sub>Ap (0%). The amount of new bone was much greater in CO<sub>3</sub>Ap (40%) compared to that in CO<sub>3</sub>Ap (30%), as shown in Figure 10. Additionally, the amount of new bone was much greater in CO<sub>3</sub>Ap (30%) compared to that in  $CO_3Ap$  (0%). It should be noted that the amount of new bone formed in  $CO_3Ap$  (0%) was greater compared to that in HAp (40%). This difference confirmed that the osteoconductivity of CO<sub>3</sub>Ap was much higher than that of HAp. Although the detailed mechanism of the higher osteoconductivity of CO<sub>3</sub>Ap has not yet been elucidated, one of the reasons behind this phenomenon could be the upregulation of differentiation from bone marrow to osteoblasts in the case of CO<sub>3</sub>Ap [32].

At 12 weeks after implantation,  $CO_3Ap$  (30%) and  $CO_3Ap$  (40%) were completely resorbed, as shown in Figures 7 and 9. If  $CO_3Ap$  (30%) and  $CO_3Ap$  (40%) were resorbed linearly with time, similar to the resorption of  $CO_3Ap$  (0%) and HAp (40%), complete resorption may have been achieved at approximately 8 weeks. This resorption rate seems sufficient for clinical purposes. Approximately 30% of  $CO_3Ap$  (0%) was resorbed at 12 weeks. Although this value is much smaller than that for  $CO_3Ap$  (30%) and  $CO_3Ap$  (40%), the rate is twice that for HAp (40%) and acceptable for clinical applications. As a result of complete resorption and new bone formation, the bone defect area was reconstructed completely. Figure 11 summarizes the comparison of trabecular thickness and trabecular number between the reconstructed side and the lateral side used as a control. There was no statistically significant difference between them, indicating the complete reconstruction of the bone defect using  $CO_3Ap$  (30%) and  $CO_3Ap$  (40%).

In this study, spherical phenol resin with a diameter of 100  $\mu$ m was used as a porogen. No optimization of the macropore size was carried out even though osteoconduction is known to be governed by pore size. Several researchers suggested that 0.3–0.5 mm is the optimal size range for osteoconduction [39,40]. At the same time, some studies proposed that pore sizes greater than 0.4 mm are less conducive to new bone formation, as evidenced by the accumulation of adipocytes and bone marrow [41] and reduced mechanical properties [39]. In general, 80–100  $\mu$ m is the minimal pore size required for osteoconduction [42–44]. Further studies are needed to optimize the 3D interconnected porous CO<sub>3</sub>Ap based on the results of this investigation.

The total porosity of the HAp (40%) blocks fabricated was  $64.2 \pm 1.0\%$ , which was close to that of the CO<sub>3</sub>Ap block (30%) at  $67.5 \pm 0.7\%$ . The DTSs of HAp (40%) and CO<sub>3</sub>Ap (30%) were  $1.8 \pm 0.3$  MPa and  $1.4 \pm 0.2$  MPa, respectively, with no statistically significant difference. On the other hand, the resorption rate of CO<sub>3</sub>Ap (30%) was approximately eight times greater than that of HAp (40%) at 4 weeks and approximately six times greater at 12 weeks. This difference in resorption rate was probably due to the osteoclasts and not to chemical dissolution because, among calcium phosphates, apatite (including CO<sub>3</sub>Ap) is the most thermodynamically stable phase [9].

From the histological images, implant resorption, vascularization, and new bone formation were observed inside the  $CO_3Ap$  (30%) blocks at 4 weeks and normal trabecular bone structure was seen at 12 weeks. Implant resorption occurred well from the trabecular side. This indicated that the resorption of the  $CO_3Ap$  block was due to osteoclasts because, in the natural bone, remodeling occurs more actively in the trabecular bone than in the cortical bone. In the HAp (40%) block, cell infiltration occurred at 4 weeks and even bone formation was observed in the macropores at the center of the samples at 12 weeks; however, new bone appeared to be immature. However, when the  $CO_3Ap$  (0%) block was inserted, new bone was formed only around the samples at 4 weeks. In general, 3D macroporous scaffolds provide greater advantages in the repair of bone defects because the interconnected macroporous structures facilitate nutrient delivery, cell migration, and eventually vascularization and bone ingrowth [45–47].

Porous blocks with organized macropores have been fabricated by 3D printing [48–51]. Currently, this method cannot produce macropores smaller than ~350  $\mu$ m [48–51]. In contrast, the method proposed in this study can control the macropore size of porous blocks, within the range of a few micrometers to several hundred micrometers, by using spherical phenol resin with the desired diameter. Wang et al. reported that the trabecular thickness was 0.083 mm when the porous block fabricated by 3D printing was implanted [51]. In this study, when CO<sub>3</sub>Ap (30%) and CO<sub>3</sub>Ap (40%) blocks were implanted, the trabecular thicknesses were 0.15 and 0.17 mm, respectively. These findings demonstrate that CO<sub>3</sub>Ap blocks have a higher osteogenic ability than porous blocks fabricated by 3D printing.

### 5. Conclusions

Macroporous  $CO_3$ Ap blocks were fabricated through a two-step dissolution–precipitation reaction using gypsum as a precursor and spherical phenol resin as a porogen. Material resorption and new bone formation were quicker in the case of  $CO_3$ Ap (30%) and  $CO_3$ Ap (40%) compared to those in  $CO_3$ Ap (0%) and HAp (40%). Treatment of the bone defect was completed within 12 weeks through reconstruction using  $CO_3$ Ap (30%) and  $CO_3$ Ap (40%). Macropores are useful for the acceleration of this process, which is similar to bone remodeling.

Author Contributions: Funding acquisition, K.I.; Investigation, Y.S. and A.T.; Supervision, K.H. and Y.N.

Funding: This study was supported, in part, by AMED under Grant Number JP19im0502004.

Conflicts of Interest: The authors declare that they have no competing interest.

#### References

1. Moore, W.R.; Graves, S.E.; Bain, G.I. Synthetic bone graft substitutes. *ANZ J. Surg.* **2001**, 71, 354–361. [CrossRef] [PubMed]

2. Brekke, J.H.; Toth, J.M. Principles of tissue engineering applied to programmable osteogenesis. *J. Biomed. Mater. Res.* **1998**, 43, 380–398. [CrossRef]

- 3. Nasr, H.F.; Aichelmann-Reidy, M.E.; Yukna, R.A. Bone and bone substitutes. *Periodontol.* 2000 **1999**, 19, 74–86. [CrossRef] [PubMed]
- 4. Kurz, L.T.; Garfin, S.R.; Booth, R.E.J. Harvesting autogenous iliac bone grafts: A review of complications and techniques. *Spine* **1989**, *14*, 1324. [CrossRef]
- 5. Uchida, A.; Araki, N.; Shinto, Y.; Yoshikawa, H.; Kurisaki, E.; Ono, K. The use of calcium hydroxyapatite ceramic in bone tumour surgery. *J. Bone Joint Surg.* **1990**, 72, 298–302. [CrossRef]
- 6. Termine, J.D.; Eanes, E.D.; Greenfield, D.J.; Nylen, M.U.; Harper, R.A. Hydrazine-deproteinated bone mineral. *Phys. Chem. Prop. Calcif. Tissue Res.* **1973**, 12, 73–90. [CrossRef]
- 7. Doi, Y.; Shibutani, T.; Moriwaki, Y.; Kajimoto, T.; Iwayama, Y. Sintered carbonate apatites as bioresorbable bone substitutes. *J. Biomed. Mater. Res.* **1998**, *39*, 603–610. [CrossRef]
- 8. Legeros, R.Z.; Trautz, O.R.; Legeros, J.P.; Klein, E.; Shirra, W.P. Apatite crystallites: Effects of carbonate on morphology. *Science* **1967**, *155*, 1409–1411. [CrossRef]
- 9. Ishikawa, K. Bone substitute fabrication based on dissolution-precipitation reaction. *Materials* **2010**, *3*, 1138–1155. [CrossRef]
- 10. Ishikawa, K.; Matsuya, S.; Lin, X.; Zhang, L.; Yuasa, T.; Miyamoto, Y. Fabrication of low crystalline B-type carbonate apatite block from low crystalline calcite block. *J. Ceram. Soc. Jpn.* **2010**, *118*, 341–344. [CrossRef]
- 11. Lee, Y.; Hahm, Y.M.; Matsuya, S.; Nakagawa, M.; Ishikawa, K. Characterization of macroporous carbonate-substituted hydroxyapatite bodies prepared in different phosphate solutions. *J. Mater. Sci.* **2007**, 42, 7843–7849. [CrossRef]
- 12. Zaman, C.T.; Takeuchi, A.; Matsuya, S.; Zaman, Q.H.; Ishikawa, K. Fabrication of B-type carbonate apatite blocks by the phosphorylation of free-molding gypsum-calcite composite. *Dent Mater. J.* **2008**, 27, 710–715. [CrossRef] [PubMed]
- 13. Daitou, F.; Maruta, M.; Kawachi, G.; Tsuru, K.; Matsuya, S.; Terada, Y.; Ishikawa, K. Fabrication of carbonate apatite block based on internal dissolution-precipitation reaction of dicalcium phosphate and calcium carbonate. *Dent Mater. J.* **2010**, *29*, 303–308. [CrossRef] [PubMed]
- 14. Maruta, M.; Matsuya, S.; Nakamura, S.; Ishikawa, K. Fabrication of low-crystalline carbonate apatite foam bone replacement based on phase transformation of calcite foam. *Dent Mater. J.* **2011**, *30*, 14–20. [CrossRef]
- 15. Sunouchi, K.; Tsuru, K.; Maruta, M.; Kawachi, G.; Matsuya, S.; Terada, Y.; Ishikawa, K. Fabrication of solid and hollow carbonate apatite microspheres as bone substitutes using calcite microspheres as a precursor. *Dent. Mater. J.* **2012**, *31*, 549–557. [CrossRef]
- 16. Ishikawa, K.; Munar, M.L.; Tsuru, K.; Miyamoto, Y. Fabrication of carbonate apatite honeycomb and its tissue response. *J. Biomed. Mater. Res. Part. A* **2019**, *107A*, 1014–1020. [CrossRef]
- 17. Tsuru, K.; Kanazawa, M.; Yoshimoto, A.; Nakashima, Y.; Ishikawa, K. Fabrication of carbonate apatite block through a dissolution–precipitation reaction using calcium hydrogen phosphate dihydrate block as a precursor. *Materials* **2017**, *10*, 374. [CrossRef]
- 18. Kanazawa, M.; Tsuru, K.; Fukuda, N.; Sakemi, Y.; Nakashima, Y.; Ishikawa, K. Evaluation of carbonate apatite blocks fabricated from dicalcium phosphate dihydrate blocks for reconstruction of rabbit femoral and tibial defects. *J. Mater. Sci. Mater. Med.* **2017**, *28*, 85–96. [CrossRef]
- 19. Wakae, H.; Takeuchi, A.; Udoh, K.; Matsuya, S.; Munar, M.; LeGeros, R.Z.; Nakasima, A.; Ishikawa, K. Fabrication of macroporous carbonate apatite foam by hydrothermal conversion of α-tricalcium phosphate in carbonate solutions. *J. Biomed. Mater. Res. A.* **2008**, *87*, 957–963. [CrossRef]
- 20. Takeuchi, A.; Munar, M.L.; Wakae, H.; Maruta, M.; Matsuya, S.; Tsuru, K.; Ishikawa, K. Effect of temperature on crystallinity of carbonate apatite foam prepared from alpha-tricalcium phosphate by hydrothermal treatment. *Bio-Med. Mater. Eng.* **2009**, *19*, 205–211.
- 21. Karashima, S.; Takeuchi, A.; Matsuya, S.; Udoh, K.; Koyano, K.; Ishikawa, K. Fabrication of low-crystallinity hydroxyapatite foam based on the setting reaction of alpha-tricalcium phosphate foam. *J. Biomed. Mater. Res. A* **2009**, *88*, 628–633. [CrossRef] [PubMed]
- 22. Sugiura, Y.; Tsuru, K.; Ishikawa, K. Fabrication of carbonate apatite foam based on the setting reaction of α-tricalcium phosphate foam granules. *Ceram. Int.* **2016**, *42*, 204–210. [CrossRef]

23. Arifta, T.I.; Munar, M.L.; Tsuru, K.; Ishikawa, K. Fabrication of interconnected porous calcium-deficient hydroxyapatite using the setting reaction of  $\alpha$  tricalcium phosphate spherical granules. *Cerams Int.* **2017**, 43, 11149–11155. [CrossRef]

- 24. Ishikawa, K.; Arifta, T.A.; Hayashi, K.; Tsuru, K. Fabrication and evaluation of interconnected porous carbonate apatite from alpha tricalcium phosphate spheres. *J. Biomed. Mater. Res. Part. B Appl. Biomater.* **2019**, *107*, 269–277. [CrossRef]
- 25. Lowmunkong, R.; Sohmura, T.; Takahashi, J.; Suzuki, Y.; Matsuya, S.; Ishikawa, K. Transformation of 3DP gypsum model to HA by treating in ammonium phosphate solution. *J. Biomed. Mater. Res. Part B App. Biomater.* **2007**, *80B*, 386–393. [CrossRef]
- 26. Lowmunkong, R.; Sohmura, T.; Suzuki, Y.; Matsuya, S.; Ishikawa, K. Fabrication of freeform bone-filling calcium phosphate ceramics by gypsum 3D printing method. *J. Biomed. Mater. Res. B Appl. Biomater.* **2009**, 90, 531–539. [CrossRef]
- 27. Nomura, S.; Tsuru, K.; Matsuya, S.; Takahashi, I.; Ishikawa, K. Fabrication of carbonate apatite block from set gypsum based on dissolution-precipitation reaction in phosphate-carbonate mixed solution. *Dent. Mater. J.* **2014**, 33, 166–172. [CrossRef]
- 28. Ayukawa, Y.; Suzuki, Y.; Koyano, K.; Ishikawa, K.; Tsuru, K. Histological comparison in rats between carbonate apatite fabricated from gypsum and sintered hydroxyapatite on bone remodeling. *BioMed Res. Int.* **2015**, *2015*, *579541*. [CrossRef]
- 29. Ishikawa, K. Carbonate apatite bone replacement. In *Handbook of Bioceeramics and Biocomposite*; Antoniac, I., Ed.; Springer: Berlin, Germany, 2018; pp. 213–232.
- 30. Ishikawa, K. Carbonate apatite scaffold for regenerative medicine. In *Handbook of Intelligent Scaffold for Tissue Engineering and Regenerative Medicine*, 2nd ed.; Khang, G., Ed.; Pan Stanford Publishing: Temasek Avenue, Singapore, 2017; pp. 141–160.
- 31. Ishikawa, K. Carbonate apatite bone replacement: Learn from the bone. *J. Ceramic Soc. Jpn.* in press. [CrossRef]
- 32. Nagai, H.; Fujioka-Kobayashi, M.; Fujisawa, K.; Ohe, G.; Takamaru, N.; Hara, K.; Uchida, D.; Tamatani, T.; Ishikawa, K. Miyamoto Y: Effects of low crystalline carbonate apatite on proliferation and osteoblastic differentiation of human bone marrow cells. *J. Mater. Sci. Mater. Med.* **2015**, *26*, 99–107. [CrossRef]
- 33. You, C.; Lee, M.H.; Lee, H.J.; Han, M.H.; Kwon, T.Y.; Kim, K.H.; Oh, D.S. The effect of macro/micro combination pore structure of biphasic calcium phosphate scaffold on bioactivity. *Ceram. Int.* **2016**, *43*, 3540–3546. [CrossRef]
- 34. Huang, H.B.; Yang, Y.; Chen, L.H.; Wang, Y.; Huang, S.Z.; Tao, J.W.; Ma, X.T.; Hasan, T.; Li, Y.; Xu, Y. Hierarchical TiO/C nanocomposite monoliths with a robust scaffolding architecture, mesopore-macropore network and TiO-C heterostructure for high-performance lithium ion batteries. *Nanoscale* **2016**, *8*, 10928–10937. [CrossRef] [PubMed]
- 35. Rossi, E.; Gerges, I.; Tocchio, A.; Tamplenizza, M.; Aprile, P.; Recordati, C.; Martello, F.; Martin, I.; Milani, P.; Lenardi, C. Biologically and mechanically driven design of an RGD-mimetic macroporous foam for adipose tissue engineering applications. *Biomaterials* **2016**, *104*, 65–77. [CrossRef] [PubMed]
- 36. Rey, C.; Collins, B.; Goehl, T.; Dickson, I.R.; Glimcher, M.J. The carbonate environment in bone mineral: A resolution-enhanced Fourier transform infrared spectroscopy study. *Calcif. Tissue Int.* **1989**, 45, 157–164. [CrossRef]
- 37. Elliott, J.C.; Hobomb, D.W.; Young, R.A. Infrared determination of the degree of substitution of hydroxyl bicarbonate ions in human dental enamel. *Calcif. Tissue Int.* **1985**, 37, 372–375. [CrossRef]
- 38. Kopperdahl, D.L.; Keaveny, T.M. Yield strain behavior of trabecular bone. *J. Biomech.* **1998**, 31, 601–608. [CrossRef]
- 39. Kuboki, Y.; Jin, Q.; Takita, H. Geometry of carriers controlling phenotypic expression in bmp-induced osteogenesis and chondrogenesis. *J. Bone Joint Surg. Am.* **2001**, *83*, S05–S115. [CrossRef]
- 40. LeGeros, R.Z. Properties of osteoconductive biomaterials: Calcium phosphates. *Clin. Orthop. Relat. Res.* **2002**, 395, 81–98. [CrossRef]
- 41. Tsuruga, E.; Takita, H.; Itoh, H.; Wakisaka, Y.; Kuboki, Y. Pore size of porous hydroxyapatite as the cell-substratum controls bmp-induced osteogenesis. *J. Biochem.* **1997**, *121*, 317–324. [CrossRef]
- 42. Daculsi, G.; Passuti, N. Effect of the macroporosity for osseous substitution of calcium phosphate ceramics. *Biomaterials* **1990**, *11*, 86–87.

43. Shimazaki, K.; Mooney, V. Comparative study of porous hydroxyapatite and tricalcium phosphate as bone substitute. *J. Orthop. Res.* **1985**, *3*, 301–310. [CrossRef] [PubMed]

- 44. Uchida, A.; Nade, S.; McCartney, E.; Ching, W. Bone ingrowth into three different porous ceramics implanted into the tibia of rats and rabbits. *J. Orthop. Res.* 1985, 3, 65–77. [CrossRef] [PubMed]
- 45. Zhu, M.; Li, K.; Zhu, Y.F.; Zhang, J.; Ye, X. 3D-printed hierarchical scaffold for localized isoniazid/rifampin drug delivery and osteoarticular tuberculosis therapy. *Acta Biomater.* **2015**, *16*, 145–155. [CrossRef] [PubMed]
- 46. Stevens, M.M. Biomaterials for bone tissue engineering. Mater. Today 2008, 11, 18–25. [CrossRef]
- 47. Zhang, J.; Zhao, S.; Zhu, Y.; Huang, Y.; Zhu, M.; Tao, C.; Zhang, C. Three-dimensional printing of strontium-containing mesoporous bioactive glass scaffolds for bone regeneration. *Acta Biomater.* **2014**, *10*, 2269–2281. [CrossRef]
- 48. Domingos, M.; Gloria, A.; Coelho, J.; Bartolo, P.; Ciurana, J. Three-dimensional printed bone scaffolds: The role of nano/micro-hydroxyapatite particles on the adhesion and differentiation of human mesenchymal stem cells. *Proc. Inst. Mech. Eng. Part. H J. Eng. Med.* **2017**, 231, 555–564. [CrossRef]
- 49. Lindner, M.; Bergmann, C.; Telle, R.; Fischer, H. Calcium phosphate scaffolds mimicking the gradient architecture of native long bones. *J. Biomed. Mater. Res. Part. A* **2014**, *102A*, 3677–3684. [CrossRef]
- 50. Adel-Khattab, D.; Giacomini, F.; Gildenhaar, R.; Berger, G.; Gomes, C.; Linow, U.; Hardt, M.; Peleska, B.; Günster, J.; Stiller, M.; et al. Development of a synthetic tissue engineered threedimensional printed bioceramic-based bone graft with homogenously distributed osteoblasts and mineralizing bone matrix in vitro. *J. Tissue Eng. Regen. Med.* 2018, 12, 44–58. [CrossRef]
- 51. Wang, H.; Wu, G.; Zhang, J.; Zhou, K.; Yin, B.; Su, X.; Qiu, G.; Yang, G.; Zhang, X.; Zhou, G.; et al. Osteogenic effect of controlled released rhBMP-2 in 3D printed poroushydroxyapatite scaffold. *Colloids Surf. B Biointerfaces* **2016**, *141*, 491–498. [CrossRef]



© 2019 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (http://creativecommons.org/licenses/by/4.0/).