
## BY-NC

## **RSC Advances**



## **PAPER**



Cite this: RSC Adv., 2018, 8, 1979

# Insight into the synergism between $MnO_2$ and acid sites over $Mn-SiO_2@TiO_2$ nano-cups for low-temperature selective catalytic reduction of NO with $NH_3\dagger$

Siyi Zheng,<sup>a</sup> Lei Song,<sup>a</sup> Siyang Tang, <sup>Da</sup> Changjun Liu,<sup>ab</sup> Hairong Yue <sup>Chang</sup> and Bin Liang<sup>ab</sup>

The rational synthesis of low-temperature catalysts with high catalytic activity and stability is highly desirable for the selective catalytic reduction of NO with NH<sub>3</sub>. Here we synthesized a Mn–SiO<sub>2</sub>/TiO<sub>2</sub> nano-cup catalyst *via* the coating of the mesoporous TiO<sub>2</sub> layers on SiO<sub>2</sub> spheres and subsequent inlay of MnO<sub>2</sub> nanoparticles in the narrow annulus. This catalyst exhibited superior catalytic SCR activities and stability for low-temperature selective catalytic reduction of NO with NH<sub>3</sub>, with NO conversion of ~100%, N<sub>2</sub> selectivity above 90% at a temperature ~140 °C. The characterization results, such as BET, XRD, H<sub>2</sub>-TPR, O<sub>2</sub>/NH<sub>3</sub>-TPD and XPS, indicated that this nano-cup structure catalyst possesses high concentration and dispersion of Mn<sup>4+</sup> active species, strong chemisorbed O<sup>-</sup> or O<sub>2</sub><sup>2-</sup> species and highly stable MnO<sub>X</sub> active components over the annular structures of the TiO<sub>2</sub> shell and SiO<sub>2</sub> sphere, and thus enhanced the low-temperature SCR performance.

Received 27th October 2017 Accepted 23rd December 2017

DOI: 10.1039/c7ra11868f

rsc.li/rsc-advances

#### 1. Introduction

The combustion of fossil fuels, *i.e.*, coal, petroleum and natural gas in stationary and mobile sources generates massive NO<sub>X</sub> emissions in the world, which gives rise to serious environmental problems such as the formation of acid rain, haze, photochemical smog and the depletion of ozone. 1-6 The selective catalytic reduction (SCR) of NO<sub>X</sub> with NH<sub>3</sub> is a crucial methodology for the reduction of NO<sub>X</sub> emissions from stationary sources, such as coal-fired power plants, because of its low cost and high efficiency. The current technologies for the industrial SCR processes primarily employ commercial V-based catalysts and operate at temperatures of 300-400 °C.7-9 There are some key issues for the high-temperature SCR process, such as obligatory placement of the catalysts in the upstream of the electrostatic precipitator and desulfurizer, catalytic deactivation by SO<sub>2</sub> or fly ash, and the generation of N<sub>2</sub>O at high temperature.10-13 In addition, the toxicity of V-based catalysts is detrimental to the environment and human-beings. Therefore, the rational design and development of excellent and green catalysts at low temperature is vital for the SCR of  $NO_X$  with  $NH_3$ .

CuO and  $\rm MnO_X$  have been extensively investigated for the SCR reaction at the temperature below 300 °C. <sup>8,14-16</sup> The  $\rm MnO_X$  based catalysts possess excellent low-temperature activity and environmentally benign property, and were regarded as excellent candidates for the industrial application in SCR reaction. <sup>17-23</sup> The strong redox property of  $\rm Mn^{4+}$  as the dominant valence species and the low crystallinity of  $\rm MnO_X$  nanopartilees in  $\rm MnO_2$  catalysts is crucial to promote the oxidation of NO to  $\rm NO_2$  and lead to an excellent low-temperature  $\rm NH_3$ -SCR activity. <sup>24-27</sup> Pena et al. found that the  $\rm MnO_X$  catalysts with different valence states and labile oxygen contributed to the excellent SCR performance in a low temperature of 120 °C. The presence of chemisorbed oxygen, which is more active than the lattice oxygen, could also facilitate the oxidation of NO for the formation of nitrates and result in a high NO conversion. <sup>28-31</sup>

The transitional mental oxides, including FeO<sub>x</sub>, CeO<sub>2</sub>, NiO,

In addition, the catalyst support with Brønsted and/or Lewis acid sites was verified to enhance the adsorption of  $\mathrm{NH_3}$  through three hydrogen bonds, and thus facilitate the low-temperature  $\mathrm{NH_3}\text{-SCR}$  reaction. Recently, Boningari *et al.* reported the  $\mathrm{NH_3}\text{-SCR}$  reaction mechanism over Mn-based catalysts *via* the correlation of activity with the acidity, manganese oxide valence state and morphology.<sup>32</sup> The results indicated that the high dispersion of  $\mathrm{MnO}_X$  and appropriate surface acidity play a synergistic effect on the SCR reaction.  $\mathrm{TiO}_2$  is a widely used catalyst support for its stable chemical properties and environmental friendliness, especially the excellent resistance of  $\mathrm{SO}_2$  for the SCR reaction in the industrial flue gas.<sup>12,16,33,34</sup> The

<sup>†</sup> Electronic supplementary information (ESI) available. See DOI: 10.1039/c7ra11868f



<sup>&</sup>quot;Multi-phases Mass Transfer and Reaction Engineering Laboratory, School of Chemical Engineering, Sichuan University, Chengdu 610065, China. E-mail: hryue@scu.edu.cn; Fax: +86 22 85997677; Tel: +86 22 85997677

<sup>&</sup>lt;sup>b</sup>Institute of New Energy and Low-Carbon Technology, Sichuan University, Chengdu 610207, China

nature of  $TiO_2$ , such as facet, shape and acid sites, also plays an essential role in the catalytic activities and long-term stability.  $^{35,36}$  Deng *et al.* reported that  $MnO_X/TiO_2$  catalyst with a preferentially anatase  $TiO_2$  facet facilitated high NO conversion and low  $N_2O$  selectivity at  $80-280\,^{\circ}C.^{37}$  Zhang *et al.* reported that the fabrication of core–shell nanomaterials could stabilize the active species and enhance stability.  $^{38}$  Therefore, the rational synthesis of  $TiO_2$  supported Mn catalysts with unique morphologies and surface chemistry for the high efficiency and stability is vital for the catalytic SCR reaction.  $^{24,39-41}$ 

Herein, a novel Mn–SiO<sub>2</sub>@TiO<sub>2</sub> nano-cup catalyst was synthesized via the coating of the mesoporous structured anatase TiO<sub>2</sub> layers on the SiO<sub>2</sub> spheres and subsequent inlay of MnO<sub>2</sub> nanoparticles (NPs) in the narrow annulus. The chemical etching method was introduced to tune the structures of TiO<sub>2</sub> layers and the size of SiO<sub>2</sub> nano-spheres, aiming at the fabrication of highly dispersed MnO<sub>2</sub> NPs and appropriate acid sites for SCR reaction. The catalysts were systematically investigated to understand surface chemistry as well as the evolution of structures and active sites. The synergic mechanism between MnO<sub>2</sub> and acid sites over the TiO<sub>2</sub>@SiO<sub>2</sub> support for low-temperature SCR reaction was also proposed on the basis of the experimental results.

## 2. Experimental section

#### 2.1 Catalysis preparation

Preparation of SiO<sub>2</sub>/TiO<sub>2</sub> nanocups. The formation process of SiO<sub>2</sub>/TiO<sub>2</sub> nano-cup was illustrated in Fig. 1. All reagents, purchased from the Sinopharm Chemical Reagent Co., Ltd (China), were of analytical standard and used without any further purification. Firstly the mixture of tetraethyl orthosilicate (TEOS, 28%, 3.84 mL), deionized water (17.2 mL), dehydrated ethanol (99.8%, 92 mL) and ammonia solution (26%, 2.48 mL) was stirred for 4 h at room temperature. The spherical SiO<sub>2</sub> templates were separated from the mixture by centrifugation and washed with ethanol for 3 times. Then the spherical SiO<sub>2</sub> were dispersed in a mixture of hydroxypropyl cellulose (HPC, 0.4 g), ethanol (80 mL), and deionized water (0.4 mL). After stirring for 40 min, titanium tert-butoxide (TBOT, 98%, 4 mL) in 20 mL ethanol was added dropwise into the mixture with stirring under reflux conditions for 100 min until the suspension was heated to 85 °C. The final product was isolated using centrifugation and calcinated in air at 500 °C for 2 h (heating rate of 2 °C min<sup>-1</sup>). The obtained SiO<sub>2</sub>@TiO<sub>2</sub> samples in 40 mL water were added with 8 mL NaOH (1.25 M) and treated for




Fig. 1 The formation process of SiO<sub>2</sub>@TiO<sub>2</sub> and TiO<sub>2</sub> nano-cups.

several hours (*i.e.*, 1.5, 2.5 and 3 h) to tune the size of  $SiO_2$  and the  $TiO_2$  layers. Then the samples were washed by ethanol for several times and dried at 80 °C for 6 h. The obtained samples were denoted as the  $SiO_2@TiO_2$ ,  $SiO_2@TiO_2$ -1.5,  $SiO_2@TiO_2$ -2.5 and  $SiO_2@TiO_2$ -3.

**Preparation of Mn–SiO**<sub>2</sub>/TiO<sub>2</sub> nano-cup catalysts. The catalysts were prepared by ultrasonic impregnation method using manganese nitrate as the precursor. Firstly, the SiO<sub>2</sub> and SiO<sub>2</sub>@TiO<sub>2</sub> spheres, and SiO<sub>2</sub>@TiO<sub>2</sub> nanocups were dispersed in water with precursor added and stirring for 0.5 h, and then under ultrasonic treatment (25 kHz and 400 W) for 2 h. The mixture was first dried at 110 °C for 12 h and calcined at 250 °C for 3 h, respectively. The amount of Mn loaded on all the catalysts was 15 wt%. The obtained catalysts were denoted as the Mn/SiO<sub>2</sub>, Mn–SiO<sub>2</sub>@TiO<sub>2</sub>, Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-1.5, Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 and Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-3.

#### 2.2 Characterizations

To observe the morphologies and the structures of the samples, the field emission scanning electron microscopy (SEM, JEM-7500F, Japan JEOL) was introduced to obtain the microstructure of the catalysts. The N<sub>2</sub> adsorption isotherm of the catalysts was obtained on ASAP 2460 (Micromeritics, USA) at -197 °C. The specific surface area was calculated based on the standard Brunauer-Emmett-Teller (BET) theory, while the pore volume and pore-size distribution using the Barrett-Joyner-Halenda (BJH) method. The powder X-ray diffraction (XRD) pattern was recorded on a Bruker D8 Advance diffractometer with CuKα radiation to investigate the crystallographic phase of the samples with a  $2\theta$  range of  $10-80^{\circ}$  and a step size of  $0.026^{\circ}$ . Inductively coupled plasma (ICP) method was used to determine the chemical composition of catalysts on a Varian Vista Axial instrument. To obtain the chemical states of catalysts elements on their surface, X-ray photoelectron spectroscopy (XPS) measurement was applied on the Thermo Fisher Scientific K-Alpha instrument with monochromatic Al  $K\alpha$  radiation.

The surface acidity of the catalysts was detected using the temperature-programmed desorption of ammonia (NH<sub>3</sub>-TPD) on a Quantachrome Autosorb-IQ-C chemisorption analyser. The sample powders were firstly pre-treated in pure He at 300 °C for 1 h and then cooled down to 80 °C. The catalysts were constantly saturated in anhydrous NH<sub>3</sub> (10% in He) at a flow rate of 30 mL min<sup>-1</sup> for 30 min and the physical adsorption of NH<sub>3</sub> was removed by He for 30 min. Finally, the desorption was carried out by heating the samples from 80 to 650 °C at a heat rate of 10 °C min<sup>-1</sup>. The oxygen temperature-programmed desorption  $(O_2$ -TPD) and  $H_2$  temperature-programmed reduction  $(H_2$ -TPR) were also performed on the Quantachrome Autosorb-IQ-C chemisorption analyser. For the O2-TPD experiment, 0.1 g sample was firstly pre-treated in pure He at 250 °C for 30 min and then cooled down to 50 °C. Then the samples were treated under pure oxygen for 1 h and the oxygen desorption was carried out by heating the sample from 50 °C to 750 °C. For H<sub>2</sub>-TPR experiment, 0.05 g of catalyst sample was pre-treated at 200 °C in pure Ar for 1 h and then cooled down to room temperature. Then the tests were conducted under 10% H<sub>2</sub>/Ar at Paper RSC Advances

a heat rate of 10  $^{\circ}$ C min $^{-1}$  from room temperature to 800  $^{\circ}$ C. The signal of H<sub>2</sub>, O<sub>2</sub> and NH<sub>3</sub> was recorded by the thermal conductivity detector (TCD).

#### 2.3 Activity test

The catalytic activity was tested in a fixed-bed stainless steel flow reactor (i.d. = 8 mm) at atmospheric pressure. The reaction conditions were set as follows: 0.21 g of catalyst, 1000 ppm NH<sub>3</sub>, 1000 ppm NO, 5 vol%  $O_2$ ,  $N_2$  as the balance, and the total gas flow rate was 200 mL min<sup>-1</sup>, and the gas hourly space velocity (GHSV) was 30 000 h<sup>-1</sup>. The concentrations of NO and NO<sub>2</sub> were measured by a Laoying 3022 Flue Gas Analyser, and the N<sub>2</sub>O was monitored by a ThermoStar Mass Spectroscope Analyser.

All activity data was recorded after 60 min when the reaction condition was steady. The  $NO_X$  conversion and  $N_2$  selectivity were calculated by:<sup>42</sup>

NO<sub>X</sub> conversion (%) = 
$$\frac{[\text{NO}_X]_{\text{in}} - [\text{NO}_X]_{\text{out}}}{[\text{NO}_X]_{\text{in}}} \times 100\%$$
 (1)

$$N_2 \text{ selectivity } (\%) = \left(1 - \frac{[N_2 O]_{out}}{[N O_X]_{in} - [N O_X]_{out}}\right) \times 100\%$$
 (2)

#### 3. Results and discussion

#### 3.1 The formation and the morphologies of the catalysts

The formation of Mn– $SiO_2$ @ $TiO_2$  nano-cup catalysts involved the preparation of the  $TiO_2$  or  $SiO_2$ @ $TiO_2$  nano-cups and subsequent inlay of  $MnO_2$  NPs in the narrow annulus using ultrasonic impregnation. As shown in Fig. 1, the spherical  $SiO_2$  template was first synthesized via the hydrolysis of TEOS, and the  $TiO_2$  shell on the  $SiO_2$  spheres was formed by the hydrolysis of tetrabutyl titanate. The amorphous  $TiO_2$  shell was transformed into the anatase phase in the calcination process at 500 °C. Then the  $SiO_2$ @ $TiO_2$  nano-spheres were put into the NaOH solution for different time to partly remove the  $SiO_2$  core and  $TiO_2$  layer. The corresponding SEM images in Fig. 2 showed that the surface of  $SiO_2$  spheres is pretty smooth, while the

surface of SiO<sub>2</sub>@TiO<sub>2</sub> is rather rough, indicating the TiO<sub>2</sub> was perfectly clad around the SiO<sub>2</sub> spheres. After 1.5 h etching treatment with NaOH, the SiO2@TiO2 samples showed small opening holes on the TiO2 outer layer encapsulated with SiO2 spheres. The increase of etching time enlarged the opening holes and reduced the inside SiO<sub>2</sub> core as nano-cup structures at 2.5 h. Further increase of the etching time will lead to disappear of inner SiO<sub>2</sub> core at about 3 h. The formed welldefined nanocups are with uniform diameter size of about 300  $\pm$  10 nm. The etched samples possess larger specific surfaces (93.16 m<sup>2</sup> g<sup>-1</sup> at 2.5 h) compared with the no etching  $SiO_2$  (aTiO<sub>2</sub> samples (40.25 m<sup>2</sup> g<sup>-1</sup>). The large pores and specific surface of the nano-cups could ensure the MnO2 active species loaded on the support with a high dispersion, and facilitate the adsorption of NH<sub>3</sub> on the surface for the SCR reaction. Therefore, the MnO<sub>2</sub> species were uniformly and well deposited on the surface of the SiO<sub>2</sub>@TiO<sub>2</sub> and TiO<sub>2</sub> nano-cups, and no obvious agglomerates was observed from the SEM images of the MnO<sub>2</sub> loaded samples in Fig. 2.

The physical properties of Mn-based catalysts were listed in Table 1. The results showed a much small surface area for the Mn/SiO $_2$  (20.3 m² g $^{-1}$ ) and Mn–SiO $_2$ @TiO $_2$  (35.9 m² g $^{-1}$ ) samples, and small pore volume of Mn/SiO $_2$  catalyst (0.072 cm³ g $^{-1}$ ). But the Mn–SiO $_2$ @TiO $_2$  nano-cup catalysts possessed large BET surface areas, with the largest BET surface of 89.98 m² g $^{-1}$  and pore volume of 0.22 cm³ g $^{-1}$  for the Mn–SiO $_2$ @TiO $_2$ -2.5 catalyst. The further extension of the etching time led to a decrease of specific surface area. The average pore diameter of all the catalysts is about 10–14 nm. It was suggested that larger surface area and appropriate pore diameter (e.g., >3 nm) were beneficial to the NH $_3$  adsorption and the SCR performance. $^{43}$ 

The XRD patterns of the catalysts were shown in Fig. 3. The diffraction peak of the anatase TiO<sub>2</sub> was detected in all the samples. The increase of the etching time weaken the peaks of anatase TiO<sub>2</sub>, suggesting that the etching treatment could result in a lower crystallinity of TiO<sub>2</sub> layer. In addition, the strong peaks of MnO<sub>2</sub> and Mn<sub>2</sub>O<sub>3</sub> were detected in the Mn–SiO<sub>2</sub>, Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-1.5 catalysts. While in the Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 and Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-3 catalysts, the intensities

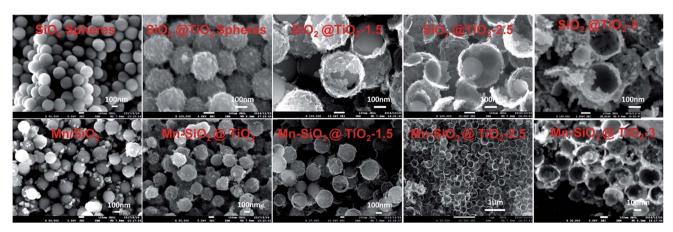


Fig. 2 The SEM images of nano-sphere/nano-cup supports and MnO<sub>2</sub>-based catalysts.

Table 1 The physical properties of the Mn-based nano-cup catalysts

Samples	$SSA^a (m^2 g^{-1})$	Pore volume <sup><math>a</math></sup> (cm <sup><math>a</math></sup> g <sup><math>-1</math></sup> )	Pore diameter <sup>a</sup> (nm)	$\mathrm{Mn}^b \left( \mathrm{wt\%} \right)$	Rate constant <sup>c</sup>
Mn/SiO <sub>2</sub>	20.34	0.072	14.17	13.45%	$3.00  imes 10^2$
Mn-SiO <sub>2</sub> @TiO <sub>2</sub>	35.91	0.118	13.18	12.67%	$9.83 \times 10^{2}$
Mn-SiO <sub>2</sub> @TiO <sub>2</sub> -1.5	69.86	0.190	11.43	13.85%	$5.24  imes 10^2$
Mn-SiO <sub>2</sub> @TiO <sub>2</sub> -2.5	89.98	0.223	10.18	14.76%	$1.90\times10^3$
Mn-SiO <sub>2</sub> @TiO <sub>2</sub> -3	77.05	0.214	11.22	14.22%	$1.48 \times 10^3$

<sup>&</sup>lt;sup>a</sup> Specific surface area (SSA) and pore volume by N<sub>2</sub>-adsorption method. <sup>b</sup> Mn content of the catalysts quantified by ICP-OES. <sup>c</sup> Pseudo-first order rate constant at 140 °C.




Fig. 3 XRD patterns of the Mn-based nano-cup catalysts.

of  $MnO_2$  were much lower, indicating the highly dispersed  $MnO_X$  species as amorphous phase over the two catalysts. The high concentration and high dispersion of Mn active species with amorphous phase on the surface were also verified for a superior SCR activity.<sup>44–46</sup>

The surface chemical states of the catalysts were also examined and the results were listed in Table 2 and Fig. 4. The results showed that the surface concentrations of Mn species decreased with the increase of the chemical etching time. This could be attributed to the enhanced surface permeability of the support *via* chemical etching, which enabled more Mn species into the inside of the spherical structures.

The XPS spectra of Mn  $2p_{3/2}$  in Fig. 4(a) clearly showed the Mn  $2p_{3/2}$  peaks at about 642.0 eV.<sup>25</sup> The peak could be separated into three overlapped peaks of Mn<sup>2+</sup>, Mn<sup>3+</sup> and Mn<sup>4+</sup>, respectively. The relative ratio of Mn<sup>4+</sup> *via* deconvolution over the catalysts was summarized in Table 2. The Mn<sup>4+</sup> content over Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 catalyst is the highest among the other catalysts, which could be attributed to the high dispersion of

Mn species on the catalyst. According to previous report, the redox process of Mn<sup>4+</sup> species was of utter importance in low-temperature SCR with NH<sub>3</sub>.<sup>26</sup> High Mn<sup>4+</sup> content could promote the oxidation process of NO to NO<sub>2</sub> and facilitate the "fast SCR" reaction, and thus enhance the low-temperature catalyst activity.<sup>47</sup> The surface contents of Mn<sup>4+</sup> species on Mn/SiO<sub>2</sub> and Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-1.5 catalyst are 39.96% and 26.22%, respectively, which is much lower than the other catalysts.

The O 1s XPS spectra of the catalysts were presented in Fig. 4(b), which could be separated into two peaks after a peakfitting deconvolution. The peak at lower binding energy of 530.0 eV could be attributed to the lattice oxygen species  $O_{\alpha}$  (Ti-O), while the peak at higher binding energy of 533-533.5 eV could be assigned to Si-O and chemisorbed oxygen O<sub>B</sub> (mainly O or O<sub>2</sub><sup>2-</sup> belonging to defect-oxide or hydroxyl-like group).<sup>48-50</sup> Because of the high mobility, it is evident that the chemisorbed oxygen species are more active than the lattice oxygen species, suggesting the high amount of chemisorbed oxygen species is in favour of the oxidation of NO to NO<sub>2</sub> and the subsequent "fast SCR" reaction.<sup>51</sup> However, Fig. 4(b) also showed the peak of O<sub>β</sub> overlapped with the peak of Si-O bond in Mn/SiO2, Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-1.5 and Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 samples. Although the trend of change in chemisorbed oxygen species could be observed in the XPS spectra, the XPS analysis results are still not adequate to determine the quantitative analysis of the chemisorbed oxygen species, further O2-TPD analysis was needed to confirm the concentration of  $O_{\beta}$  over the catalysts.

#### 3.2 $O_2$ -TPD of the catalysts

 $O_2$ -TPD is an effective way to analyse the mobility and quantity of oxygen species, and the results of the oxygen desorption behaviour of the catalysts were shown in Fig. 5. At desorption temperature below 200  $^{\circ}$ C, the oxygen adsorption peaks could

Table 2 Chemical states of the Mn-based nano-cup catalysts

Samples	Mn (%)	O (%)	Mn <sup>4+</sup> (%)	$Si\text{-}O + O_\beta/\big(O_\alpha + O_\beta\big)  \big(\%\big)$	Mn <sup>4+</sup> (%)
Mn/SiO <sub>2</sub>	5.03	66.77	39.96	87.32	2.00
Mn-SiO <sub>2</sub> @TiO <sub>2</sub>	10.8	65.58	51.57	39.26	5.56
Mn-SiO <sub>2</sub> @TiO <sub>2</sub> -1.5	6.85	66.88	26.22	54.97	1.80
Mn-SiO <sub>2</sub> @TiO <sub>2</sub> -2.5	6.52	65.85	60.64	61.38	3.97
Mn-SiO <sub>2</sub> @TiO <sub>2</sub> -3	5.46	66.91	50.90	51.43	2.78

Paper RSC Advances




Fig. 4 (a) Mn  $2p_{3/2}$  and (b) O 1s XPS spectra of the Mn-based nanocup catalysts.

be observed on the Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-1.5, Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 and Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-3 samples, while no significant desorption peaks on the Mn/SiO2 and Mn-SiO2@TiO2 catalysts. This lowtemperature desorption peaks may correspond to the physically adsorbed oxygen or weakly chemically adsorbed oxygen species.52 With the increase of desorption temperature, all samples showed oxygen desorption. The strong peak centred at around 500 °C was observed on all the samples, which could be assigned to strongly chemically absorbed  ${\rm O_2}^{2-}$  or  ${\rm O}^-$  species. These oxygen species are derived from the interaction of MnO<sub>X</sub> and O<sub>2</sub>. For the Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 sample, an extra strong peak at around 590 °C suggested the strong interaction between the Mn and Ti species. Moreover, the strongly chemically absorbed oxygen peak at 500 °C of the Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 sample was much higher and sharp than other catalysts, indicating the excellent oxygen adsorption capacity, which may lead to a favourable catalytic SCR reaction.53

#### 3.3 H<sub>2</sub>-TPR of the catalysts

In order to analyse the redox behaviour of the catalysts,  $H_2$ -TPR was conducted and the results were presented in Fig. 6. For the Mn/SiO<sub>2</sub> and Mn–SiO<sub>2</sub>@TiO<sub>2</sub> samples, the two strong reduction peaks at around 295 °C and 400 °C could be assigned to the reduction of MnO<sub>2</sub>/Mn<sub>2</sub>O<sub>3</sub> to Mn<sub>3</sub>O<sub>4</sub> and the reduction of Mn<sub>3</sub>O<sub>4</sub> to MnO, respectively.<sup>1,37</sup> Consequently, the results of




Fig. 5 O<sub>2</sub>-TPD profiles of the Mn-based nano-cup catalysts.




Fig. 6 H<sub>2</sub>-TPR profiles of the Mn-based nano-cup catalysts.

TPR analysis agree well with that of XPS results. It is noticeable that the two reduction peaks in the profile of Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 sample moved to a higher temperature. The decrease of reducibility over Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 sample may be ascribed to a much strong interaction of Mn and Ti and good dispersion of surface active species over the catalyst, which will lead to a high stable SCR reaction. And the enhancing interaction of Mn and Ti over this sample could be explained by more Mn species entering into the bulk facet of Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 rather than the surface facet of other catalysts. Moreover, the broader and lager reduction peak of Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 sample than other samples suggested the higher oxygen storage ability and higher Mn<sup>4+</sup> content. On the other hand, the Mn-SiO<sub>2</sub>(aTiO<sub>2</sub>-1.5 sample showed lower reduction peak areas and therefore, only presented inferior SCR performance, especially in the lower temperature range. The H<sub>2</sub>-TPR results are well in consistent with the O2-TPD and activity results.

#### 3.4 NH<sub>3</sub>-TPD of the catalysts

The adsorption of NH<sub>3</sub> species was regarded as a key step in NH<sub>3</sub>-SCR reaction, which greatly relys on the surface acidity of the catalysts.<sup>54</sup> Therefore, the surface acidity of the catalysts were analysed *via* NH<sub>3</sub>-TPD, and the results were shown in Fig. 7. There were three main peaks over the Mn-SiO<sub>2</sub>@TiO<sub>2</sub>




Fig. 7 NH<sub>3</sub>-TPD profiles of the Mn-based nano-cup catalysts.

catalysts except for the Mn/SiO<sub>2</sub> sample. The first peak centred at around 150 °C could be assigned to desorption of physical adsorption NH<sub>3</sub> and some NH<sub>4</sub><sup>+</sup> on the weak Brønsted acid sites. The second peak located at around 280 °C could be assigned to NH<sub>4</sub><sup>+</sup> on the strong Brønsted acid sites. And the third strong peak was a broad NH<sub>3</sub> desorption peak from 350–650 °C, which represents the coordinated NH<sub>3</sub> species strongly adsorbed onto the Lewis acid sites.<sup>55</sup> The calculated areas of Lewis acid sites for Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-1.5, Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 and Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-3 catalysts were 1423, 1389 and 1272, respectively, suggesting the surface acidity of the these three samples were much higher than that of the Mn/SiO<sub>2</sub> and Mn–SiO<sub>2</sub>@TiO<sub>2</sub> catalysts. The calculated areas of the peaks decreased gradually with the increase of the NaOH etching time, which makes sense since the alkaline NaOH would influence the surface acidity.

#### 3.5 The catalytic activities and stabilities

The catalyst performance of the NO conversion and the  $N_2$  selectivity as the function of reaction temperature were presented in Fig. 8. The catalytic activity of Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-1.5 and Mn/SiO<sub>2</sub> catalysts were very low in the temperature range of 80–180 °C compared with the other three catalysts, which also showed distinct declination of  $NO_X$  conversion above 200 °C. Nevertheless, the Mn–SiO<sub>2</sub>@TiO<sub>2</sub>, Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 and Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-3 catalysts showed significant NO conversion (>80%) when the temperature at 140 °C and exhibited excellent activity in the temperature range of 140–240 °C. The Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 sample achieved NO conversion of 45% at 80 °C and 100% in a wide operation temperature from 150 to 240 °C at the GHSV of 30 000 h<sup>-1</sup>. However, the NO conversion of the Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-3 catalyst showed much lower than that of Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 catalyst in the low temperature (*e.g.*, <160 °C).

The  $N_2$  selectivities over the catalysts were illustrated in Fig. 8(b). It is obvious that the  $N_2$  selectivity over  $Mn/SiO_2$  catalyst dropped sharply during the whole temperature range due to the unselective catalytic oxidation of  $NH_3$  on  $Mn/SiO_2$  sample. The  $N_2$  selectivity of  $Mn-SiO_2$  TiO2,  $Mn-SiO_2$  TiO2-1.5 and  $Mn-SiO_2$  TiO2-3 samples dropped to around 80% at temperature of 180 °C. However, for the  $Mn-SiO_2$  TiO2-2.5

catalyst, the high  $N_2$  selectivity (above 90%) was obtained during the whole operation temperature range indicated that the product of SCR reaction is in favour of  $N_2$  and not  $N_2$ O over the Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 catalyst.

From the characterizations (such as XRD, XPS,  $O_2/NH_3$ -TPD and  $H_2$ -TPR) above, the Mn–SiO<sub>2</sub>@TiO<sub>2</sub> nano-cup catalyst was demonstrated with a large specific area, highly dispersed MnO<sub>X</sub> as amorphous phase and high content of surface acidity. These properties are crucial for the SCR reaction. In addition, the Mn–SiO<sub>2</sub>/TiO<sub>2</sub> nano-cup catalyst possesses high concentration of Mn<sup>4+</sup> species and oxygen vacancy, which facilitate the activation of NH<sub>3</sub> and oxygen chemisorption of NO, and thus enhanced the low-temperature selective catalytic reduction of NO with NH<sub>3</sub>.

To testify the stability of Mn-based nano-cup catalysts, the long-term stability test of the SCR reaction were performed over Mn-SiO<sub>2</sub>(a)TiO<sub>2</sub>-2.5 catalyst and the results were illustrated in Fig. 9. When the NO conversion reached up to 100% after reaction for 3 h over the Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 catalyst, it showed an excellent SCR stability with a NO conversion stable at a value of 100% during the next 120 h test. The high stability could be attributed to the high dispersion of the MnO2 active sites and the unique annulus structure between mesoporous TiO2 layers and SiO2 sphere for stabilizing the MnO2 nanoparticles. Moreover, we added the characterizations of the 120 h-stability-tested Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 sample using XRD, BET and SEM techniques, respectively. The BET surface of the used catalyst is ca. 64 m<sup>2</sup> g<sup>-1</sup>, which showed a slight decrease compared with the fresh sample. The XRD results (Fig. S1†) showed a low intensity of  $MnO_2$  in the used sample, indicating that  $MnO_X$  species still maintained its high dispersity and stability during the reaction process. Moreover, the SEM image (Fig. S2†) showed that the used catalyst could maintain the morphologies after the longtime reaction. In addition, the impacts of H<sub>2</sub>O and SO<sub>2</sub> on the SCR activity of Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 sample have also been investigated and the results were summarized in Fig. S3.† The results showed that the NO conversion over the Mn-SiO<sub>2</sub>(a)TiO<sub>2</sub>-2.5 decreased from the initial 100% to 90% with the introduction of 5 vol% H<sub>2</sub>O. However the performance could be recovered after switching off H2O. With the addition of SO2




Fig. 8 The  $NO_X$  conversion (a), and  $N_2$  selectivity (b) of the Mn-based nano-cup catalysts. Reaction conditions:  $[NO] = [NH_3] = 1000$  ppm,  $[O_2] = 5\%$ , balance  $N_2$ , GHSV = 30 000 h<sup>-1</sup>.




Fig. 9 Stability test profile of the Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 catalyst.

Paper RSC Advances

(200 ppm) for 4 h, the NO conversion declined to about 42% and could not be recovered after switching off  $SO_2$ . Since the  $SO_3$  from the oxidation of  $SO_2$  reacts with  $NH_3$  to form  $NH_4HSO_4$  and  $(NH_4)_2SO_4$ , they could physically block the active sites and result in the drop of SCR activity. Therefore, the  $SO_2$  resistance of manganese-based catalyst at low temperature still needed the further improvement.

## 3.6 The role of $MnO_2$ species and acidic sites of $Mn-SiO_2/TiO_2$ nano-cup catalyst for SCR reaction

On the basis of the characterizations and the catalytic performance of the  $Mn-SiO_2$ @ $TiO_2$  catalysts, both the  $MnO_X$  species and surface acid sites are playing an essential role in the low-temperature selective catalytic reduction of NO with NH<sub>3</sub>. Therefore, we proposed a synergism between  $MnO_2$  and acid sites over  $Mn-SiO_2$ @ $TiO_2$  nano-cups for low-Temperature SCR reaction and the mechanism was illustrated in Fig. 10.

At first, the NH<sub>3</sub> molecule was absorbed onto the Lewis acid center and the oxygen atoms of the MnO<sub>2</sub> sites to form aminooxy groups, while the NO absorbs onto the surface oxygen vacancies as nitrosvls. Second, the absorbed NO would be oxidized to gas-phase NO2 in the presence of gas-phase oxygen and oxygen vacancies were recovered. 57,58 The SCR reaction happened between aminooxy groups and gas-phase NO2 to produce N2 and H2O via the surface dehydroxylations and reoxidation of oxygen vacancies. At the same time, NH3 molecule could be adsorbed onto the neighboring Brønsted acid sites on the SiO<sub>2</sub>@TiO<sub>2</sub> support. The adsorbed NH<sub>3</sub> would react with NO2 to form an active complex. This step may include NO oxidation to NO2 or diffusion of NO2 to adsorbed NH3 if significant gas-phase NH3 is present. The oxidation of NO to NO2 plays an important role in NH3-SCR reaction through "fast SCR" pathway: NO + NO $_2$  + 2NH $_3 \rightarrow 2N_2$  + 3H $_2$ O. $^{59}$  The NO oxidation of Mn-SiO2@TiO2-2.5 was tested and demonstrated in Fig. S5† and NO-TPD analysis was also performed to investigate the adsorption behavior of NO over the five catalyst samples and the results are shown in Fig. S6.† The formed active complex will react rapidly with NO or NO2 to form N2/N2O and H<sub>2</sub>O. Then the catalyst surface was recovered and the SCR reaction process cycles. It is possible that the interactions with other NH<sub>3</sub> molecules will enhance the decomposition process and facilitates the new SCR cycles. From the proposed synergetic mechanism, the superior NO conversion and N2 selectivity over the Mn-SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 catalyst could be attributed to its higher concentration of Mn<sup>4+</sup> and Lewis acid sites, as well as the




Fig. 10 The proposed synergism between  $MnO_2$  and acid sites over  $Mn-SiO_2$ @Ti $O_2$  nano-cups for low-Temperature SCR reaction.

higher oxygen storage ability. The inferior  $N_2$  selectivity of Mn/SiO<sub>2</sub> sample might result from the subsequent formation of surface nitrate groups since the NO<sub>2</sub> could react rapidly with the active complex to generate  $N_2$ O.

#### 4. Conclusions

A novel Mn–SiO<sub>2</sub>@TiO<sub>2</sub> nano-cup catalyst was synthesized *via* the coating of the mesoporous TiO<sub>2</sub> layers on SiO<sub>2</sub> sphere and subsequent inlay of MnO<sub>2</sub> nanoparticles in the narrow annulus. The Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 catalyst exhibited superior activity and stability for low-temperature selective catalytic reduction of NO with NH<sub>3</sub>, with a NO conversion of ~100%, N<sub>2</sub> selectivity above 90% at the temperature ~140 °C, and a stable performance during the 120 h stability test. The characterizations results indicated that this nano-cup structure of the Mn–SiO<sub>2</sub>@TiO<sub>2</sub>-2.5 catalyst possesses high concentration and dispersion of Mn<sup>4+</sup> active species, strong chemisorbed O<sup>-</sup> or O<sub>2</sub><sup>2-</sup> species and highly stable MnO<sub>X</sub> active components over the annular structures of TiO<sub>2</sub> shell and SiO<sub>2</sub> sphere, and thus are favourable to the low-temperature selective catalytic reduction of NO with NH<sub>3</sub>.

#### Conflicts of interest

There are no conflicts to declare.

## Acknowledgements

The authors are grateful for the support from the Natural Science Foundation of China (21236004, 21576169).

#### Notes and references

- 1 R. Guo, M. Li, P. Sun, S. Liu, S. Wang, W. Pan, S. Liu, J. Liu and X. Sun, *RSC Adv.*, 2017, 7, 19912–19923.
- 2 R. Guo, S. Wang, W. Pan, M. Li, P. Sun, S. Liu, X. Sun, S. Liu and J. Liu, *J. Phys. Chem. C*, 2017, **121**, 7881–7891.
- 3 S. Andreoli, F. A. Deorsola, C. Galletti and R. Pirone, *Chem. Eng. J.*, 2015, **278**, 174–182.
- 4 R. Guo, W. Pan, X. Zhang, H. Xu, Q. Jin, C. Ding and S. Guo, *Sep. Sci. Technol.*, 2013, **48**, 2871–2875.
- 5 T. Zhang, J. Liu, D. Wang, Z. Zhao, Y. Wei, K. Cheng, G. Jiang and A. Duan, *Appl. Catal.*, *B*, 2014, **148**, 520–531.
- 6 L. Zhu, Z. Zhong, H. Yang and C. Wang, Water, Air, Soil Pollut., 2016, 227, 476.
- 7 J. Ding, J. Lin, J. Xiao, Y. Zhang, Q. Zhong, S. Zhang, L. Guo and M. Fan, *J. Alloys Compd.*, 2016, **665**, 411–417.
- 8 J. Liu, X. Li, Q. Zhao, J. Ke, H. Xiao, X. Lv, S. Liu, M. Tade and S. Wang, *Appl. Catal.*, *B*, 2017, **200**, 297–308.
- 9 R. Guo, Y. Zhou, W. Pan, J. Hong, W. Zhen, Q. Jin, C. Ding and S. Guo, *J. Ind. Eng. Chem.*, 2013, **19**, 2022–2025.
- C. Liu, L. Chen, J. Li, L. Ma, H. Arandiyan, Y. Du, J. Xu and J. Hao, *Environ. Sci. Technol.*, 2012, 46, 6182–6189.
- 11 L. Zhang, D. Zhang, J. Zhang, S. Cai, C. Fang, L. Huang, H. Li, R. Gao and L. Shi, *Nanoscale*, 2013, 5, 9821–9829.
- 12 P. Wang, Q. Wang, X. Ma, R. Guo and W. Pan, *Catal. Commun.*, 2015, **71**, 84–87.

- 13 X. Xie, J. Lu, E. Hums, Q. Huang and Z. Lu, *Energy Fuels*, 2015, 29, 3890–3896.
- 14 J. Yu, F. Guo, Y. Wang, J. Zhu, Y. Liu, F. Su, S. Gao and G. Xu, *Appl. Catal.*, *B*, 2010, **95**, 160–168.
- 15 P. R. Ettireddy, N. Ettireddy, S. Mamedov, P. Boolchand and P. G. Smirniotis, *Appl. Catal.*, *B*, 2007, **76**, 123–134.
- 16 B. Thirupathi and P. G. Smirniotis, *Appl. Catal., B*, 2011, **110**, 195–206.
- 17 S. Cai, J. Liu, K. Zha, H. Li, L. Shi and D. Zhang, *Nanoscale*, 2017, 9, 5648–5657.
- 18 S. Xiong, Y. Liao, X. Xiao, H. Dang and S. Yang, *Catal. Sci. Technol.*, 2015, 5, 2132–2140.
- 19 L. Huang, X. Hu, S. Yuan, H. Li, T. Yan, L. Shi and D. Zhang, *Appl. Catal.*, *B*, 2017, **203**, 778–788.
- 20 Y. J. Kim, H. J. Kwon, I. S. Nam, J. W. Choung, J. K. Kil, H. J. Kim, M. S. Cha and G. K. Yeo, *Catal. Today*, 2010, 151, 244–250.
- 21 J. Chen, Y. Zheng, W. Cai, H. Zou, W. Zheng, Y. Zhang, X. Chen and B. Fu, *Micro Nano Lett.*, 2017, 12, 6–10.
- 22 G. Qi and R. Yang, Appl. Catal., B, 2003, 44, 217-225.
- 23 H. Jiang, C. Wang, H. Wang and M. Zhang, *Mater. Lett.*, 2016, **168**, 17–19.
- 24 D. K. Pappas, T. Boningari, P. Boolchand and P. G. Smirniotis, *J. Catal.*, 2016, 334, 1–13.
- 25 M. Kang, E. D. Park, J. M. Kim and J. E. Yie, *Appl. Catal.*, *A*, 2007, 327, 261–269.
- 26 C. Fang, D. Zhang, S. Cai, L. Zhang, L. Huang, H. Li, P. Maitarad, L. Shi, R. Gao and J. Zhang, *Nanoscale*, 2013, 5, 9199–9207.
- 27 D. A. Pena, B. S. Uphade and P. G. Smirniotis, *J. Catal.*, 2004, 221, 421–431.
- 28 Y. Chen, J. Wang, Z. Yan, L. Liu, Z. Zhang and X. Wang, *Catal. Sci. Technol.*, 2015, 5, 2251–2259.
- 29 S. Cai, H. Hu, H. Li, L. Shi and D. Zhang, *Nanoscale*, 2016, 8, 3588–3598.
- 30 H. Hu, S. Cai, H. Li, L. Huang, L. Shi and D. Zhang, *ACS Catal.*, 2015, **5**, 6069–6077.
- 31 L. Zhang, L. Shi, L. Huang, J. Zhang, R. Gao and D. Zhang, *ACS Catal.*, 2014, 4, 1753–1763.
- 32 T. Boningari and P. G. Smirniotis, *Curr. Opin. Chem. Eng.*, 2016, **13**, 133–141.
- 33 N. Yang, R. Guo, Q. Wang, W. Pan, Q. Chen, C. Lu and S. Wang, *RSC Adv.*, 2016, **6**, 11226–11232.
- 34 P. R. Ettireddy, N. Ettireddy, T. Boningari, R. Pardemann and P. G. Smirniotis, *J. Catal.*, 2012, **292**, 53–63.

- 35 K. Lv, Q. Xiang and J. Yu, Appl. Catal., B, 2011, 104, 275–281.
- 36 J. Yu, S. Liu and H. Yu, J. Catal., 2007, 249, 59-66.
- 37 S. Deng, T. Meng, B. Xu, F. Gao, Y. Ding, L. Yu and Y. Fan, *ACS Catal.*, 2016, **6**, 5807–5815.
- 38 M. Fu, C. Li, P. Lu, L. Qu, M. Zhang, Y. Zhou, M. Yu and Y. Fang, *Catal. Sci. Technol.*, 2014, 4, 14–25.
- 39 G. Li, J. Liu, J. Lan, G. Li, Q. Chen and G. Jiang, *CrystEngComm*, 2014, **16**, 10547–10552.
- 40 Y. Yang, G. Wang, Q. Deng, H. Wang, Y. Zhang, D. H. L. Ng and H. Zhao, *RSC Adv.*, 2014, **4**, 34577–34583.
- 41 C. Hu, X. Zhang, W. Li, Y. Yan, G. Xi, H. Yang, J. Li and H. Bai, *J. Mater. Chem. A*, 2014, 2, 2040–2043.
- 42 S. Yang, J. Li, C. Wang, J. Chen, L. Ma, H. Chang, L. Chen, Y. Peng and N. Yan, *Appl. Catal., B*, 2012, **117**, 73–80.
- 43 S. Ali, L. Chen, F. Yuan, R. Li, T. Zhang, S. u. H. Bakhtiar, X. Leng, X. Niu and Y. Zhu, *Appl. Catal.*, B, 2017, 210, 223– 234
- 44 G. S. Qi and R. T. Yang, J. Catal., 2003, 217, 434-441.
- 45 W. S. Kijlstra, D. S. Brands, E. K. Poels and A. Bliek, *J. Catal.*, 1997, **171**, 208–218.
- 46 H. Y. Huang and R. T. Yang, Langmuir, 2001, 17, 4997-5003.
- 47 A. Grossale, I. Nova, E. Tronconi, D. Chatterjee and M. Weibel, *J. Catal.*, 2008, **256**, 312–322.
- 48 J. C. Dupin, D. Gonbeau, P. Vinatier and A. Levasseur, *Phys. Chem. Chem. Phys.*, 2000, 2, 1319–1324.
- 49 P. Yang, Z. Quan, Z. Hou, C. Li, X. Kang, Z. Cheng and J. Lin, *Biomaterials*, 2009, **30**, 4786–4795.
- 50 L. Ma, J. Li, R. Ke and L. Fu, *J. Phys. Chem. C*, 2011, **115**, 7603–7612.
- 51 Z. Wu, R. Jin, Y. Liu and H. Wang, *Catal. Commun.*, 2008, 9, 2217–2220.
- 52 G. Qi and W. Li, Catal. Today, 2015, 258, 205-213.
- 53 P. Li, C. He, J. Cheng, C. Y. Ma, B. J. Dou and Z. P. Hao, *Appl. Catal.*, *B*, 2011, **101**, 570–579.
- 54 N. Y. Topsoe, Science, 1994, 265, 1217-1219.
- 55 N. Yang, R. Guo, W. Pan, Q. Chen, Q. Wang and C. Lu, *Fuel*, 2016, **169**, 87–92.
- 56 J. Liu, J. Liu, Z. Zhao, Y. Wei, W. Song, J. Li and X. Zhang, *Ind. Eng. Chem. Res.*, 2017, **56**, 5833–5842.
- 57 W. Tian, H. Yang, X. Fan and X. Zhang, *J. Hazard. Mater.*, 2011, **188**, 105–109.
- 58 X. Fan, F. Qiu, H. Yang, W. Tian, T. Hou and X. Zhang, *Catal. Commun.*, 2011, **12**, 1298–1301.
- 59 Q. Li, H. S. Yang, F. M. Qiu and X. B. Zhang, *J. Hazard. Mater.*, 2011, **192**, 915–921.