



16S rRNA Gene Amplicon Data Set-Based Bacterial Diversity in a Water-Soil Sample from Pangong Tso Lake, a High-Altitude Grassland Lake of the Northwest Himalayas

Garima Bisht,^a Anuradha Sourirajan,^a David J. Baumler,^{b,c,d} Kamal Dev^{a,b}

^aFaculty of Applied Sciences and Biotechnology, Shoolini University, Solan, Himachal Pradesh, India

^bDepartment of Food Science and Nutrition, University of Minnesota—Twin Cities, St. Paul, Minnesota, USA

^cMicrobial and Plant Genomic Institute, University of Minnesota—Twin Cities, St. Paul, Minnesota, USA

^dBiotechnology Institute, University of Minnesota—Twin Cities, St. Paul, Minnesota, USA

ABSTRACT We report here 16S rRNA-based bacterial diversity existing during freezing conditions in a high-altitude Himalayan lake through sequencing a 16S rRNA gene amplicon data set. A total of 121,857 high-quality reads were obtained; 40.78% of the bacterial population was classified to the genus level, while 1.26% was classified to the species level.

High-altitude lakes in the Himalayas represent unique areas of microbially diverse populations that are exposed to freezing temperatures, salinity, high UV radiation, low oxygen, and limited nutrients (1). Pangong Tso Lake (33.819770°N, 78.614501°E) is one such lake, situated at an elevation of about 4,350 m in the Northwest Himalayas. Metagenomic studies of such unique environments are gaining importance in providing a better understanding of microbial ecology and its applications to biotechnology (2–4). Unlike previous studies which explored the whole metagenome in a sample collected in the month of September (5), we collected a water-soil mixture (pH 9.0) aseptically underneath the frozen lake surface (1 foot depth; ice was broken to create a hole) using a sterile long-handled stainless steel ladle during the peak of winter (January; temperature of –10°C) to specifically identify bacterial diversity. The salinity of the water-soil slurry was determined by quantitation of ions using flame photometry (6). The water-soil slurry contained 29, 0.6, and 14.73 mmol per liter of sodium, potassium, and chloride ions, respectively. The total salinity of the water-soil slurry was ~0.12%. The total genomic DNA was isolated from the water-soil mixture using a Nucleospin soil kit (TaKaRa Bio, Ltd.), and an $A_{260/280}$ of ~1.81 was quantified with a NanoDrop instrument. The amplicon library was prepared using a Nextera XT index kit (Illumina, Inc.). The primers for the amplification of the V3-V4 region of 16S rRNA genes (forward, GCCTACGGGNGGCWGCAG, and reverse, ACTACHVGGGTATCTAATCC) were designed at Eurofins. The V3-V4 region is highly variable and known to reveal microbially diverse populations (7). The amplicon library was purified using 1× AMPure XP beads, quantified using a Qubit fluorometer, and analyzed with a 4200 TapeStation system (Agilent Technologies) using D1000 screen tape following the manufacturer's instructions. The library was loaded onto a MiSeq instrument (2 × 300 bp) at 10 to 20 pM for cluster generation and sequencing. The sequenced raw reads were processed to obtain high-quality (HQ) reads using Trimmomatic v0.35 (8) to remove adaptor sequences, ambiguous reads, and low-quality sequences

Received 27 August 2018 Accepted 24 September 2018 Published 1 November 2018

Citation Bisht G, Sourirajan A, Baumler DJ, Dev K. 2018. 16S rRNA gene amplicon data set-based bacterial diversity in a water-soil sample from Pangong Tso Lake, a high-altitude grassland lake of the Northwest Himalayas. *Microbiol Resour Annot* 7:e01192-18. <https://doi.org/10.1128/MRA.01192-18>.

Editor Frank J. Stewart, Georgia Institute of Technology

Copyright © 2018 Bisht et al. This is an open-access article distributed under the terms of the [Creative Commons Attribution 4.0 International license](https://creativecommons.org/licenses/by/4.0/).

Address correspondence to David J. Baumler, dbaumler@umn.edu, or Kamal Dev, kamaldevbhardwaj1969@gmail.com.

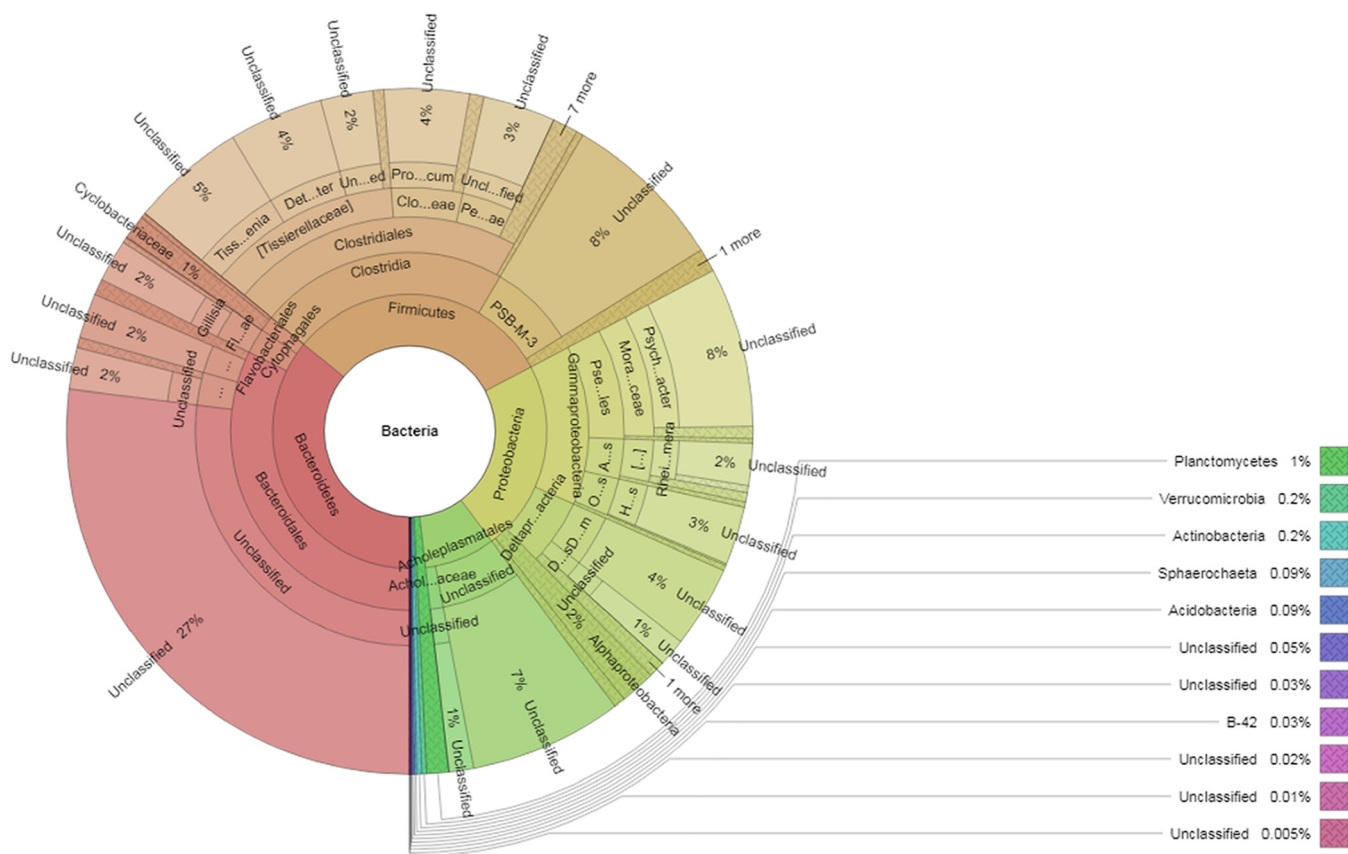


FIG 1 Krona chart of the bacteria represented by 16S rRNA gene amplicon-based bacterial diversity in a soil-water sample from a high-altitude cold desert lake. Each circle represents the phylum, class, order, family, genus, and species from the inside to the outside of the circle, respectively, indicated by percent diversity based on the absolute number of representative bacteria.

(i.e., those with a more than 10% quality threshold [QV] of <20 Phred quality score). A total of 121,857 high-quality reads were obtained. The HQ reads were subjected to operational taxonomic unit (OUT) identification at 97% sequence similarity and taxonomic assignment of OTUs using the Greengenes database (16S/Archaea database) and the Quantitative Insights into Microbial Ecology (QIIME) module. Krona-based (9) diagram visualization showed that 99.22% of the microbially diverse population represents *Bacteroidetes* (35.97%), *Firmicutes* (31.27%), *Proteobacteria* (22.56%), *Tenericutes* (8.38%), and *Planctomycetes* (1.04%) at the phylum level (Fig. 1). The remaining microbially diverse population represents the phyla *Verrucomicrobia* (0.23%), *Actinobacteria* (0.23%), *Spirochaetae* (0.09%), *Acidobacteria* (0.09%), *Cyanobacteria* (0.05%), *Gemmatimonadetes* (0.03%), and *Deinococcus-Thermus* (0.03%) and the candidate phyla TM6 (0.02%) and SR1 (0.01%). A fraction of the population (0.05%) was unclassified even at the phylum level. Only 40.78% of the bacterial population was classified to the genus level, and 1.26%, representing *Firmicutes* (0.209088%), *Proteobacteria* (0.471663%), and *Bacteroidetes* (0.585932%), was classified to the species level (Table 1). About 2.70025771% and 0.068075174% were represented by members of the genera *Halomonas* and *Marinomonas*, respectively.

Data availability. The 16S rRNA gene amplicon data set is available at NCBI (National Center for Biotechnology Information) under the SRA accession number [SRP158149](https://www.ncbi.nlm.nih.gov/sra/SRP158149).

TABLE 1 Summary of bacteria identified to the species level from a 16S rRNA gene-based metagenomic study of a soil-water mixture from a high-altitude lake

Phylum	Class	Order	Family	Species	Absolute count	%
Firmicutes	<i>Clostridia</i>	<i>Clostridiales</i>	<i>Clostridiaceae</i>	<i>Alkaliphilus transvaalensis</i> ^a	3	0.0072
	<i>Clostridia</i>	<i>Clostridiales</i>	<i>Peptostreptococcaceae</i>	<i>Clostridium sticklandii</i> ^b	4	0.0097
	<i>Clostridia</i>	<i>Clostridiales</i>	<i>Peptococcaceae</i>	<i>Desulfosporosinus merdii</i> ^c	28	0.0680
	<i>Bacilli</i>	<i>Bacillales</i>	<i>Planococcaceae</i>	<i>Planococcus pelagicus</i> ^d	51	0.1240
Proteobacteria	<i>Betaproteobacteria</i>	<i>Methylophilales</i>	<i>Methylophilaceae</i>	<i>Methylotenera mobilis</i> ^e	25	0.0608
	<i>Gammaproteobacteria</i>	<i>Alteromonadales</i>	<i>OM60</i>	<i>Haliea mediterranea</i> ^f	4	0.0097
	<i>Gammaproteobacteria</i>	<i>Oceanospirillales</i>	<i>Oceanospirillaceae</i>	<i>Marinomonas primoryensis</i> ^g	5	0.0122
	<i>Gammaproteobacteria</i>	<i>Alteromonadales</i>	<i>Chromatiaceae</i>	<i>Rheinheimera perlucida</i> ^h	138	0.3355
	<i>Alphaproteobacteria</i>	<i>Rhodobacterales</i>	<i>Rhodobacteraceae</i>	<i>Paracoccus marcusii</i> ⁱ	22	0.0535
Bacteroidetes	<i>Cytophagia</i>	<i>Cytophagales</i>	<i>Cyclobacteriaceae</i>	<i>Aquiflexum balticum</i> ^j	6	0.0146
	<i>Cytophagia</i>	<i>Cytophagales</i>	<i>Cyclobacteriaceae</i>	<i>Rhodonellum psychrophilum</i> ^k	235	0.5713

^a Extremely alkaliphilic.

^b Anaerobic motile Gram-positive bacterium, nonpathogenic to humans.

^c Sulfate-reducing bacterium.

^d Rare isolate.

^e Methylamine-utilizing bacterium.

^f Halophile, pale yellow pigmented.

^g Gram-negative, aerobic, psychrophilic, halophilic, and motile bacterium.

^h Marine bacterium.

ⁱ Orange Gram-negative coccus.

^j Marine bacterium isolated from the Baltic Sea.

^k A psychrophilic and alkaliphilic bacterium reported in the literature and a pure isolate from soil-water mixture in the current study is reported as *Rhodonellum psychrophilum* strain GL8 under GenBank accession number [MH031708](https://doi.org/10.1101/2018.01.11.281708).

ACKNOWLEDGMENTS

We acknowledge Prem Kumar Khosla, vice chancellor, and the members of the yeast biology laboratory (YBL), Shoolini University, for supporting this project.

Funding for this work was provided by Shoolini University to K.D. to promote research under the Center for Omics and Biodiversity Research.

REFERENCES

- Rasuk MC, Ferrer GM, Kurth D, Portero LR, Farias ME, Albarracin VH. 2017. UV-resistant Actinobacteria from high-altitude Andean Lakes: isolation, characterization and antagonistic activities. *Photochem Photobiol* 93: 865–880. <https://doi.org/10.1111/php.12759>.
- Handelsman J. 2004. Metagenomics: application of genomics to uncultured microorganisms. *Microbiol Mol Biol Rev* 68:669–685. <https://doi.org/10.1128/MMBR.68.4.669-685.2004>.
- Ortiz-Alvarez R, Casamayor EO. 2016. High occurrence of Pacearchaeota and Woearchaeota (Archaea superphylum DPANN) in the surface waters of oligotrophic high-altitude lakes. *Environ Microbiol Rep* 8:210–217. <https://doi.org/10.1111/1758-2229.12370>.
- Babilonia J, Conesa A, Casaburi G, Pereira C, Louyakis AS, Reid RP, Foster JS. 2018. Comparative metagenomics provides insight into the ecosystem functioning of the Shark Bay stromatolites, Western Australia. *Front Microbiol* 9:1359. <https://doi.org/10.3389/fmicb.2018.01359>.
- Rathour R, Gupta J, Kumar M, Hiloidhari M, Mehrotra AK, Thakur IS. 2017. Metagenomic sequencing of microbial communities from brackish water of Pangong Lake of the northwest Indian Himalayas. *Genome Announcements* 5:e01029-17. <https://doi.org/10.1128/genomeA.01029-17>.
- Greenberg AE, Clesceri LS, Eator AD. 1992. Standard methods for the examination of water and wastewater, 18th ed. American Public Health Association (APHA), Washington, DC.
- Cardoso DC, Sandionigi A, Cretoi MS, Casiraghi M, Stal L, Bolhuis H. 2017. Comparison of the active and resident community of a coastal microbial mat. *Sci Rep* 7:2969. <https://doi.org/10.1038/s41598-017-03095-z>.
- Bolger AM, Lohse M, Usadel B. 2014. Trimmomatic: a flexible trimmer for Illumina sequence data. *Bioinformatics* 30:2114–2120. <https://doi.org/10.1093/bioinformatics/btu170>.
- Ondov BD, Bergman NH, Phillippy AM. 2011. Interactive metagenomic visualization in a Web browser. *BMC Bioinformatics* 12:385. <https://doi.org/10.1186/1471-2105-12-385>.